


high voltage rectifier diodes

diodes de redressement haute tension

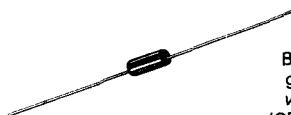


Types	I _O (mA)	V _{RRM} (V)	I _{FSM} 10 ms (A)	V _F / I _F		I _R /V _{RRM} max (μA)	V _{(BR)R} min (V)	Case
				max (V)	(mA)			

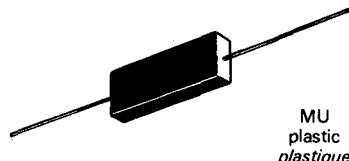
100 mA / T_{amb} = 25°C T_j = 125°C

CY 501 H CY 751 H	100	50000 75000	30	65 105	100 100	10	60000 100000	 CY H plastic plastique (CB-328 → CY 501 H) (CB-339 → CY 751 H)
----------------------	-----	----------------	----	-----------	------------	----	-----------------	---


100 mA / T_{amb} = 55°C T_j = 150°C

1N 5181 1N 5182	100	4000 5000	3,5	10	100	5		 BV 01 glass verre (CB-329)
--------------------	-----	--------------	-----	----	-----	---	--	--


200 mA / T_{amb} = 25°C T_j = 125°C

MU 2 MU 3 MU 4 MU 5 MU 6 MU 8 MU 10 MU 20	200	2000 3000 4000 5000 6000 8000 10000 20000	2	5,2 7,8 10,4 13 15,6 20,8 26 52	200	100*	2160 3240 4300 5400 6300 8740 10800 21600	 MU plastic plastique
--	-----	--	---	--	-----	------	--	---

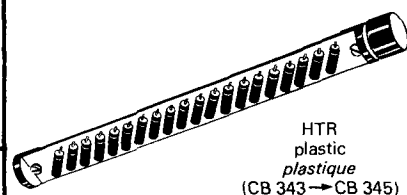
200 mA / T_{amb} = 25°C T_j = 125°C

ME 30 ME 60 ME 100 ME 120 ME 200	200	3000 6000 10000 12000 20000	2,5	3 6 10 12 24	200	10		 ME plastic plastique (CB-323 → CB 326)
--	-----	---	-----	--------------------------	-----	----	--	--

220 mA / T_{amb}** = 55°C T_j = 125°C

DHR 21	220	10000	50	14	220	10*		 DHR plastic plastique (CB-331)
--------	-----	-------	----	----	-----	-----	--	--

220 mA / T_{amb}** = 55°C T_j = 125°C

HTR 210 HTR 213 HTR 217 HTR 220	220	100000 135000 170000 200000	50	140 196 231 280	220	1		 HTR plastic plastique (CB 343 → CB 345)
--	-----	--------------------------------------	----	--------------------------	-----	---	--	---

* T_{amb} = 100°C

** in oil,
dans l'huile.