

OKI Semiconductor

MSM5218

ADPCM Voice Analysis/Synthesis IC


GENERAL DESCRIPTION

The MSM5218 is a complete voice analysis/synthesis IC featuring the Adaptive Differential Pulse Code Modulation (ADPCM) method of data compression. The MSM5218 contains an analysis stage where serial PCM data is compressed to 3- or 4-bit parallel ADPCM data. In addition, a synthesis stage synthesizes PCM data from ADPCM data.


FEATURES

- ADPCM data compatible with OKI's synthesis IC MSM5205
- Analysis/synthesis switching pin provided
- Lower power consumption achieved by one-chip CMOS IC
- Built-in 10-bit D/A converter for analog output
- Variable sampling frequency (4 kHz, 6 kHz, 8 kHz)
- Master clock frequency: 384 kHz
- Package: 24-pin plastic DIP (DIP24-P-600) (Product name: MSM5218RS)

BLOCK DIAGRAM

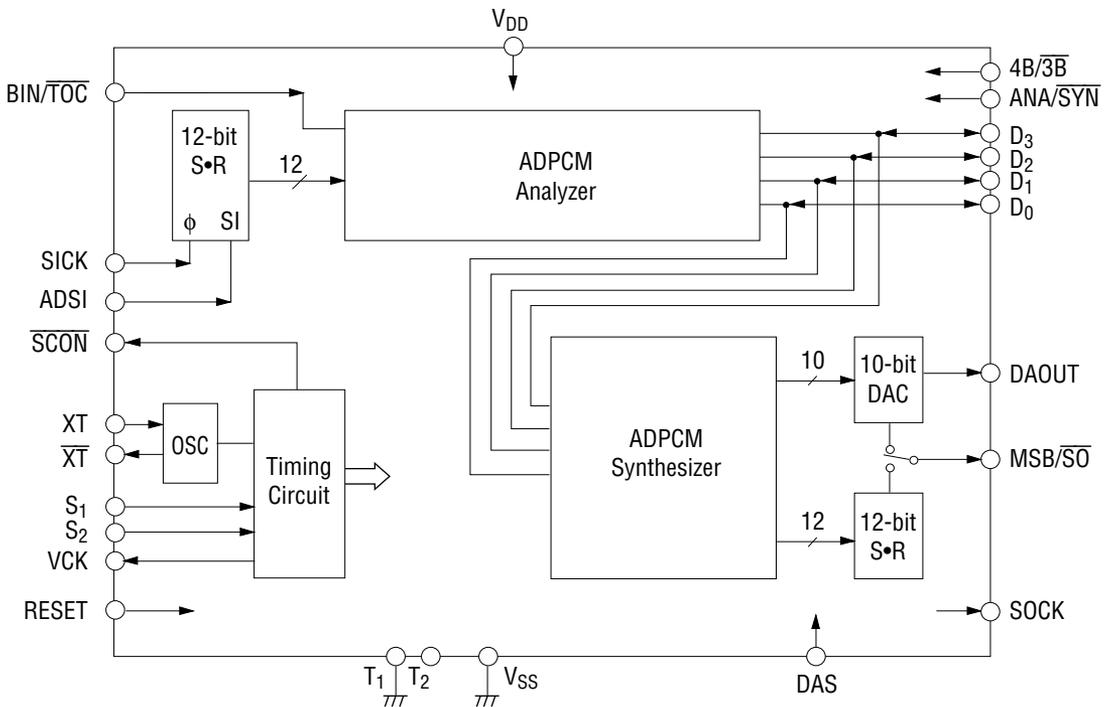

PIN CONFIGURATION (TOP VIEW)

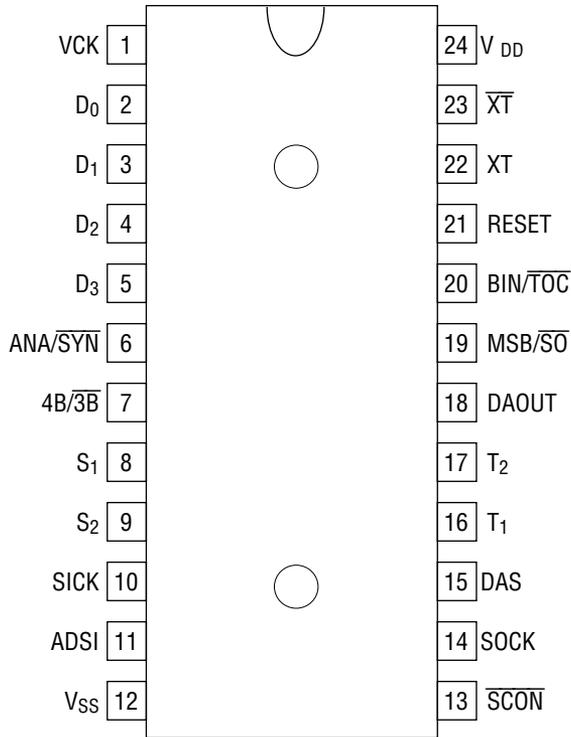

24-Pin Plastic DIP

Note: The product name actually printed on the product is "M5218".

ABSOLUTE MAXIMUM RATINGS

| Parameter | Symbol | Condition | Rating | Unit |
|----------------------|-----------|--------------------------|------------------|------------------|
| Power Supply Voltage | V_{DD} | $T_a = 25^\circ\text{C}$ | -3.0 to +7.0 | V |
| Input Voltage | V_{IN} | $T_a = 25^\circ\text{C}$ | -3.0 to V_{DD} | V |
| Power Dissipation | P_D | $T_a = 25^\circ\text{C}$ | 200 max | mW |
| Storage Temperature | T_{STG} | — | -55 ~ +150 | $^\circ\text{C}$ |

RECOMMENDED OPERATING CONDITIONS

| Parameter | Symbol | Condition | Range | Unit |
|-----------------------|-----------|----------------------|------------|------------------|
| Power Supply Voltage | V_{DD} | — | +3 to +6 | V |
| Operating Temperature | T_{OP} | — | -30 to +70 | $^\circ\text{C}$ |
| Oscillator Frequency | f_{OSC} | Specified Oscillator | 386 to 768 | kHz |

ELECTRICAL CHARACTERISTICS

DC Characteristics


($V_{DD} = 5V \pm 5\%$, $T_a = -30^\circ\text{C}$ to $+70^\circ\text{C}$, $T_a = 25^\circ\text{C}$ typically)

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|---------------------------------------|--------------|--|------|---------|------|---------------|
| Input High Voltage | V_{IH} | All inputs except XT, T_1 , T_2 | 4.2 | — | — | V |
| Input Low Voltage | V_{IL} | All inputs except XT, T_1 , T_2 | — | — | 0.8 | V |
| Input High Current (1) | I_{IH} | $V_{IN} = V_{DD}$ | — | — | 1 | μA |
| Input Low Current | I_{IL} | $V_{IN} = 0V$ | — | — | -1 | μA |
| Output High Current | I_{OH} | \overline{SCON} , VCK, SOCK, MSB/ \overline{SO} , D0 to D3 $V_0 = 4.2V$ | -50 | — | — | μA |
| Output Low Current | I_{OL} | \overline{SCON} , VCK, SOCK, MSB/ \overline{SO} , D0 to D3 $V_0 = 0.4V$ | 50 | — | — | μA |
| Operating Current | I_{DD} | $f_{VCK} = 8\text{kHz}$ | — | 3 | 6 | mA |
| DA. OUT Output Impedance | V_{OR} | — | — | 100 | — | $k\Omega$ |
| D/A Accuracy (Internal 10-bit D/A) | V_E | Full Scale $V_{DD} = +5V$ | — | ± 4 | — | LSB |
| SICK Clock Frequency | $f_{(SICK)}$ | — | — | — | 500 | kHz |
| Input High Current (2) | I_{IH2} | $V_{IN} = V_{DD}$ (Note 1) | 20 | — | 400 | μA |


Note 1: Applicable for Reset.

APPLICATION CIRCUITS


Example where a 12-bit AD Converter is Connected

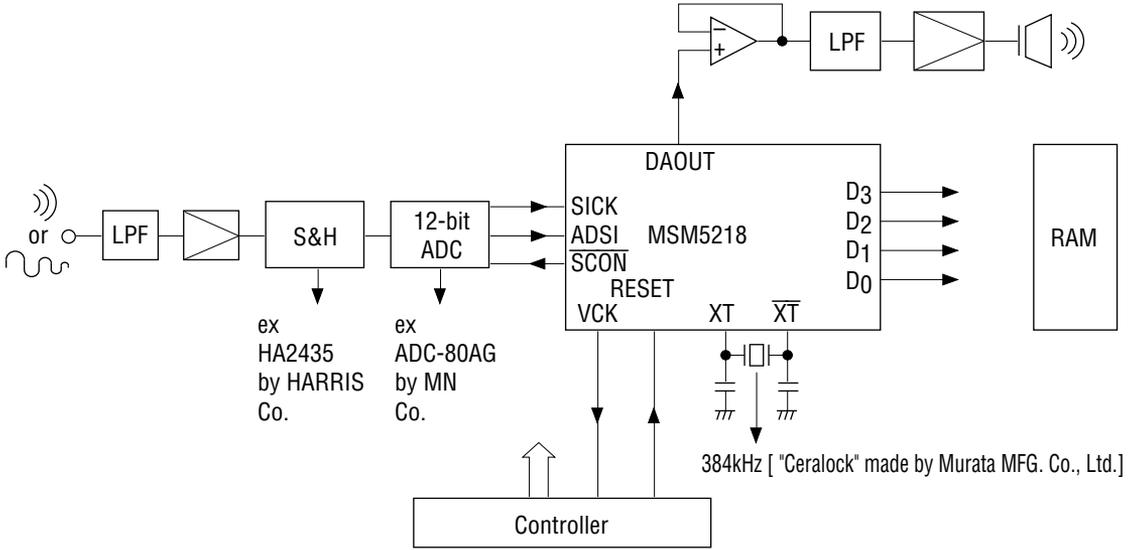

Voice Analysis/Synthesis Circuit Example (When MSM5204 is Used)

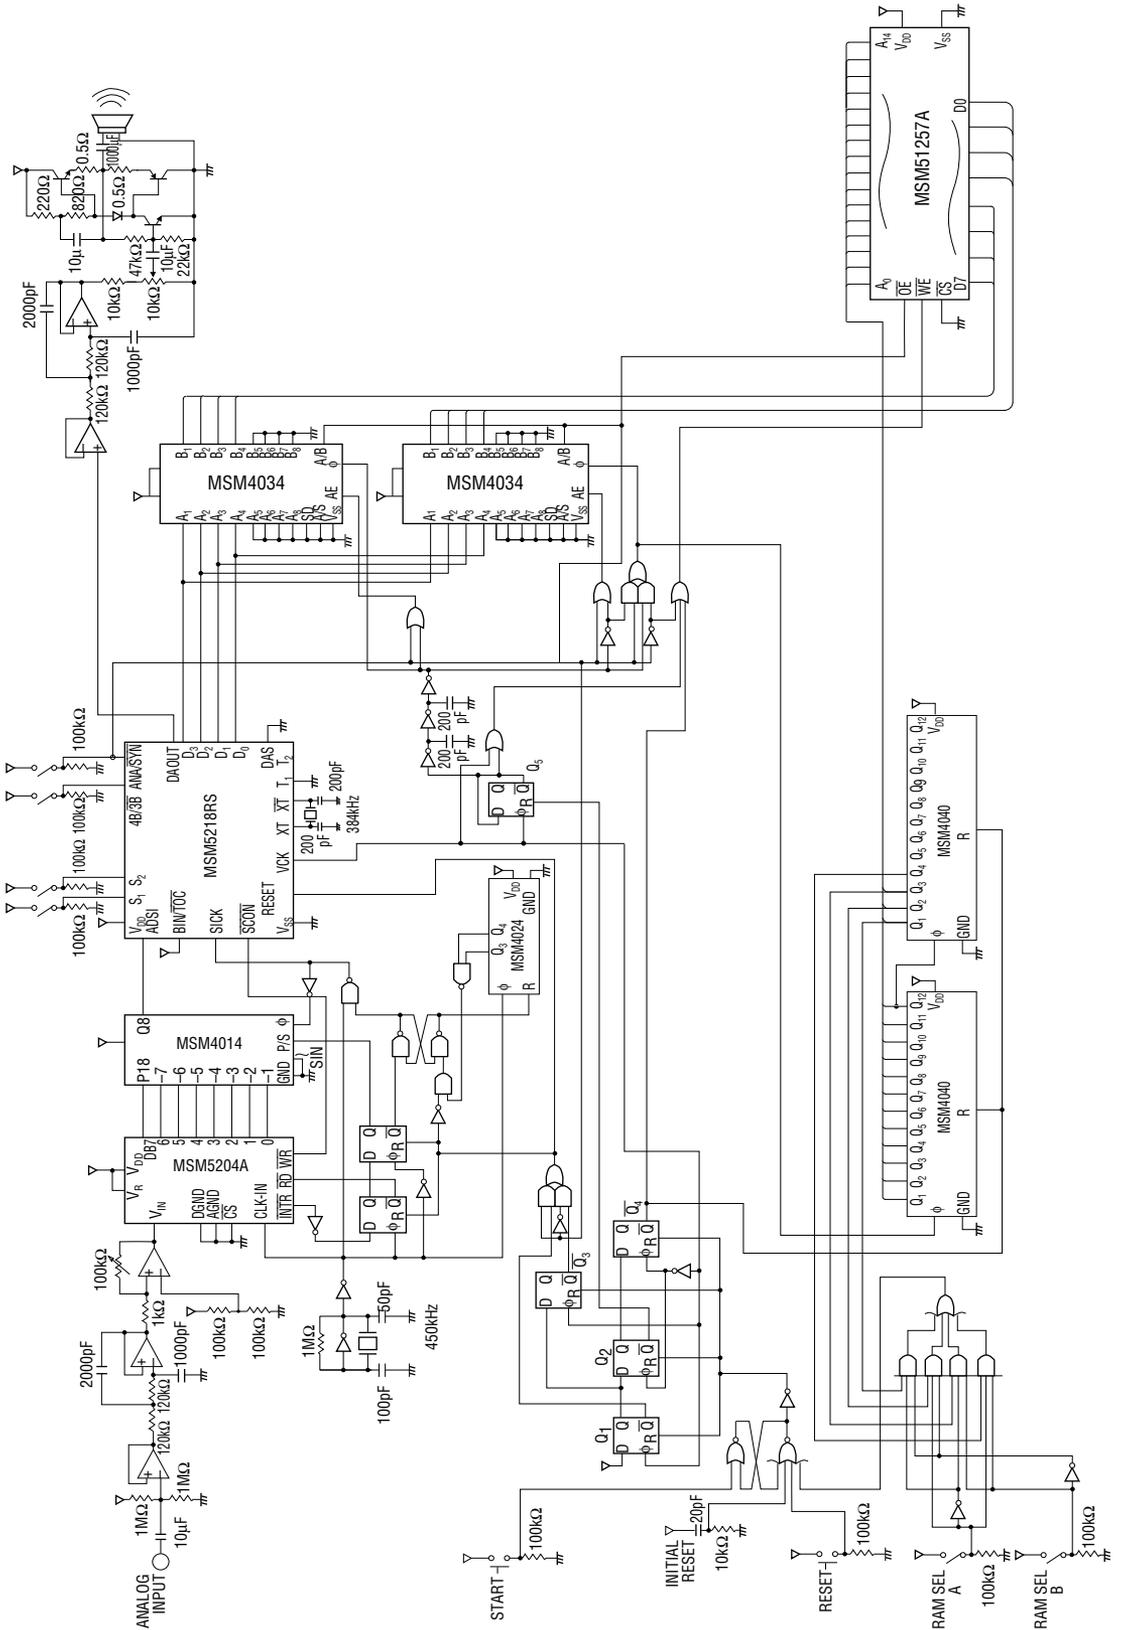

Voice Analysis/Synthesis Circuit Example (When ADC-80AG by MN Co. is Used)

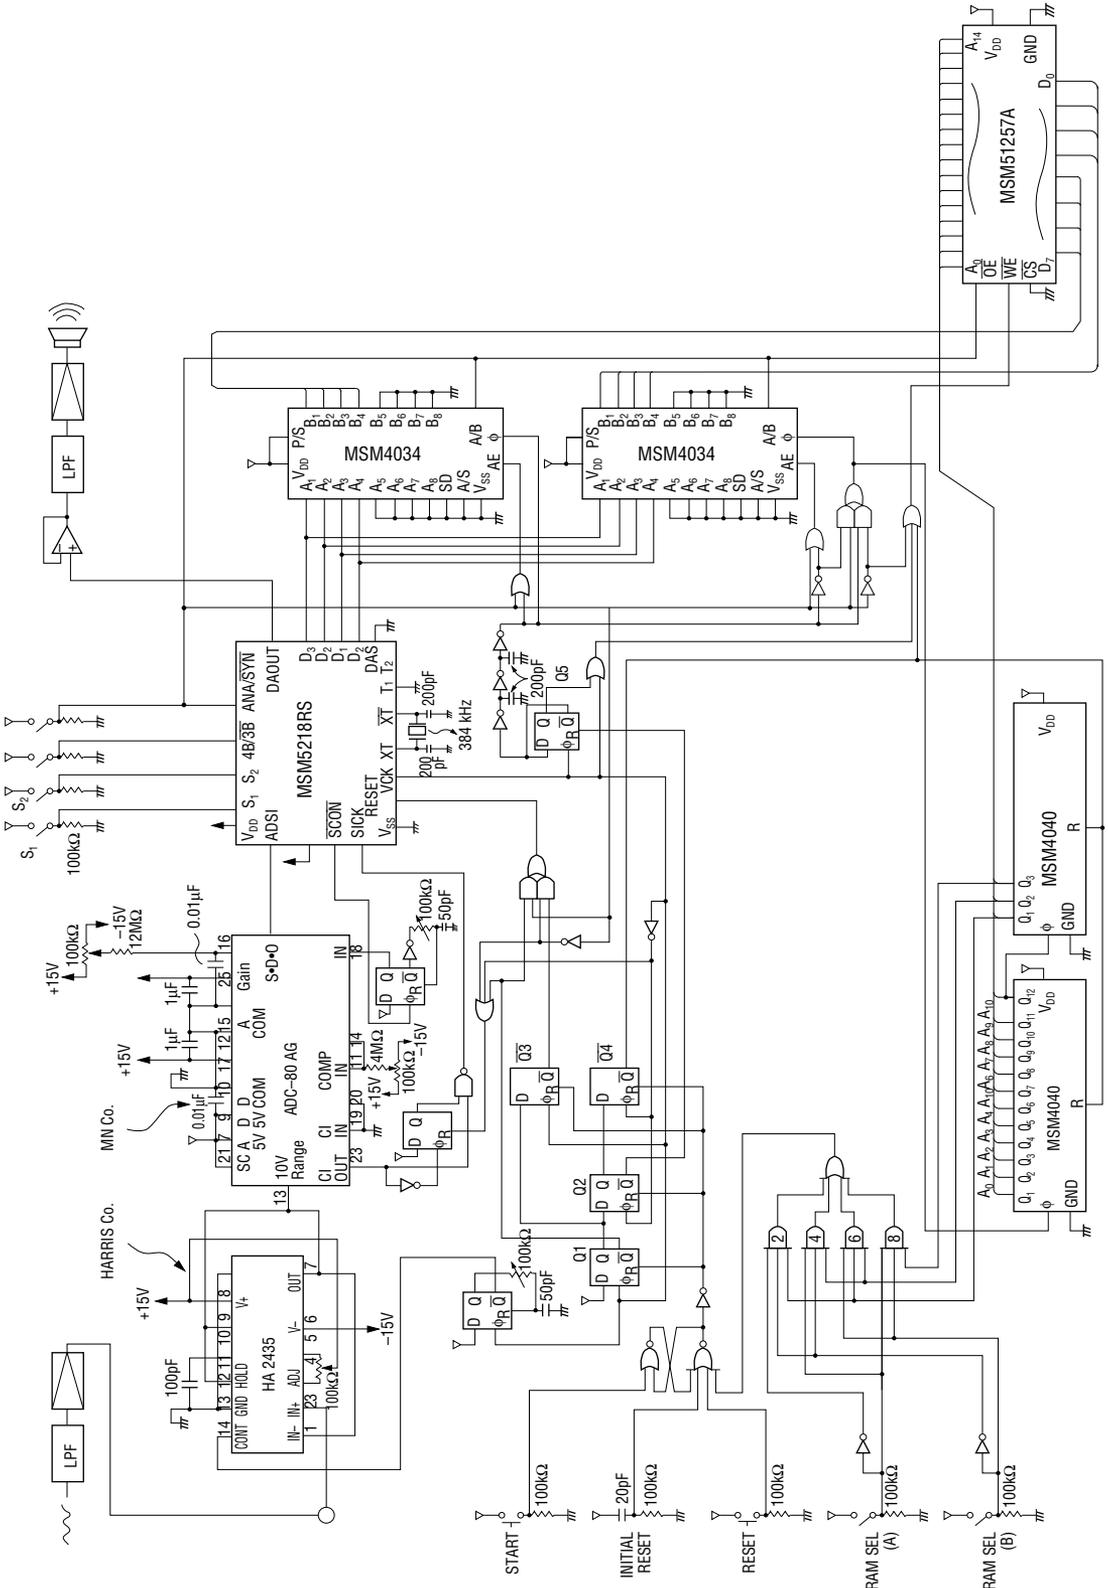

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.