

# LM136-5.0/LM236-5.0/LM336-5.0

## 5.0V Reference Diode

### General Description

The LM136-5.0/LM236-5.0/LM336-5.0 integrated circuits are precision 5.0V shunt regulator diodes. These monolithic IC voltage references operate as a low temperature coefficient 5.0V zener with 0.6Ω dynamic impedance. A third terminal on the LM136-5.0 allows the reference voltage and temperature coefficient to be trimmed easily.

The LM136-5.0 series is useful as a precision 5.0V low voltage reference for digital voltmeters, power supplies or op amp circuitry. The 5.0V makes it convenient to obtain a stable reference from low voltage supplies. Further, since the LM136-5.0 operates as a shunt regulator, it can be used as either a positive or negative voltage reference.

The LM136-5.0 is rated for operation over -55°C to +125°C while the LM236-5.0 is rated over a -25°C to +85°C temperature range. The LM336-5.0 is rated for operation over a


0°C to +70°C temperature range. See the connection diagrams for available packages. For applications requiring 2.5V see LM136-2.5.

### Features

- Adjustable 4V to 6V
- Low temperature coefficient
- Wide operating current of 600 μA to 10 mA
- 0.6Ω dynamic impedance
- ± 1% initial tolerance available
- Guaranteed temperature stability
- Easily trimmed for minimum temperature drift
- Fast turn-on
- Three lead transistor package

### Connection Diagrams

**TO-92**  
**Plastic Package**




00571604

**Bottom View**

Order Number LM336Z-5.0 or LM336BZ-5.0  
See NS Package Number Z03A

**TO-46**  
**Metal Can Package**




00571605

**Bottom View**

Order Number LM136H-5.0,  
LM136H-5.0/883, LM236H-5.0,  
LM136AH-5.0, LM136AH-5.0/883,  
or LM236AH-5.0  
See NS Package Number H03H

**SO Package**




00571607


Order Number LM336M-5.0 or LM336BM-5.0  
See NS Package Number M08A

## Typical Applications

5.0V Reference




5.0V Reference with Minimum Temperature Coefficient

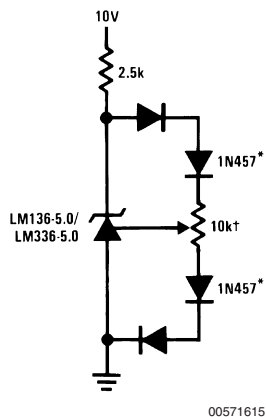

† Adjust to 5.00V

\* Any silicon signal diode

Trimmed 4V to 6V Reference  
with Temperature Coefficient  
Independent of Breakdown Voltage



\* Does not affect temperature coefficient

**Absolute Maximum Ratings** (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Reverse Current	15mA
Forward Current	10mA
Storage Temperature	-60°C to +150°C
Operating Temperature Range (Note 2)	
LM136-5.0	-55°C to +150°C
LM236-5.0	-25°C to +85°C

LM336-5.0

0°C to +70°C

**Soldering Information**

TO-92 Package (10 sec.)	260°C
TO-46 Package (10 sec.)	300°C
SO Package	
Vapor Phase (60 sec.)	215°C
Infrared (15 sec.)	220°C

See AN-450 "Surface Mounting Methods and Their Effect on Product Reliability" (appendix D) for other methods of soldering surface mount devices.

**Electrical Characteristics**

(Note 3)

Parameter	Conditions	LM136A-5.0/LM236A-5.0			LM336B-5.0			Units
		LM136-5.0/LM236-5.0			LM336-5.0			
		Min	Typ	Max	Min	Typ	Max	
Reverse Breakdown Voltage	T <sub>A</sub> =25°C, I <sub>R</sub> =1 mA							
	LM136-5.0/LM236-5.0/LM336-5.0	4.9	5.00	5.1	4.8	5.00	5.2	V
	LM136A-5.0/LM236A-5.0, LM336B-5.0	4.95	5.00	5.05	4.90	5.00	5.1	V
Reverse Breakdown Change With Current	T <sub>A</sub> =25°C, 600 μA≤I <sub>R</sub> ≤10 mA		6	12		6	20	mV
Reverse Dynamic Impedance	T <sub>A</sub> =25°C, I <sub>R</sub> =1 mA, f = 100 Hz		0.6	1.2		0.6	2	Ω
Temperature Stability (Note 4)	V <sub>R</sub> Adjusted 5.00V							
	I <sub>R</sub> =1 mA, (Figure 2)							
	0°C≤T <sub>A</sub> ≤70°C (LM336-5.0)					4	12	mV
	–25°C≤T <sub>A</sub> ≤+85°C (LM236-5.0)		7	18				mV
	–55°C≤T <sub>A</sub> ≤+125°C (LM136-5.0)		20	36				mV
Reverse Breakdown Change With Current	600 μA≤I <sub>R</sub> ≤10 mA		6	17		6	24	mV
Adjustment Range	Circuit of Figure 1		±1			±1		V
Reverse Dynamic Impedance	I <sub>R</sub> = 1 mA		0.8	1.6		0.8	2.5	Ω
Long Term Stability	T <sub>A</sub> =25°C±0.1°C, I <sub>R</sub> =1 mA, t = 1000 hrs		20			20		ppm

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Electrical specifications do not apply when operating the device beyond its specified operating conditions.

**Note 2:** For elevated temperature operation,  $T_J$  max is:

LM136	150°C
LM236	125°C
LM336	100°C


Thermal Resistance	TO-92	TO-46	SO-8
$\theta_{ja}$ (Junction to Ambient)	180°C/W (0.4" Leads) 170°C/W (0.125" Leads)	440°C/W	165°C/W
$\theta_{jc}$ (Junction to Case)	N/A	80°C/W	N/A

**Note 3:** Unless otherwise specified, the LM136-5.0 is specified from  $-55^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ , the LM236-5.0 from  $-25^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$  and the LM336-5.0 from  $0^\circ\text{C} \leq T_A \leq +70^\circ\text{C}$ .

**Note 4:** Temperature stability for the LM336 and LM236 family is guaranteed by design. Design limits are guaranteed (but not 100% percent production tested) over the indicated temperature and supply voltage ranges. These limits are not used to calculate outgoing quality levels. Stability is defined as the maximum change in  $V_{REF}$  from  $25^\circ\text{C}$  to  $T_A(\text{min})$  or  $T_A(\text{max})$ .


## Typical Performance Characteristics

### Reverse Voltage Change

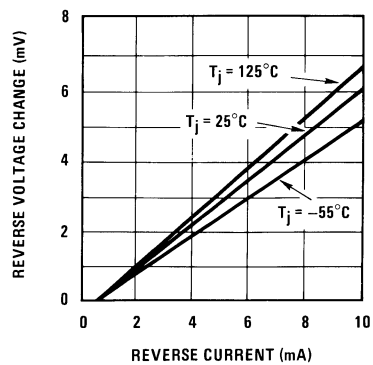


00571617

### Zener Noise Voltage

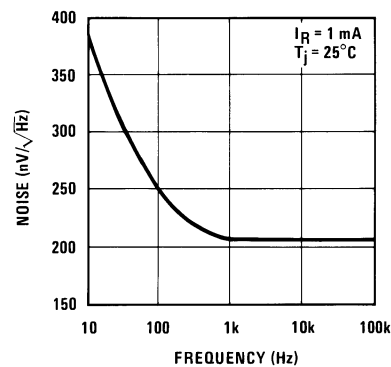


00571618

### Dynamic Impedance

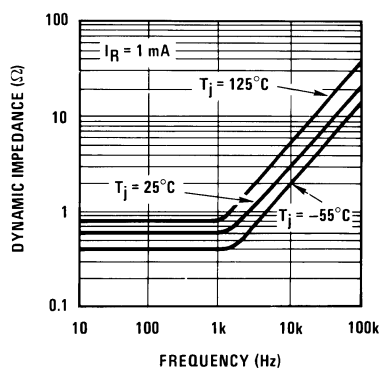


00571619

### Response Time

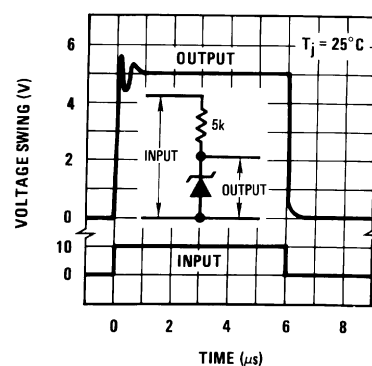


00571620

### Reverse Characteristics

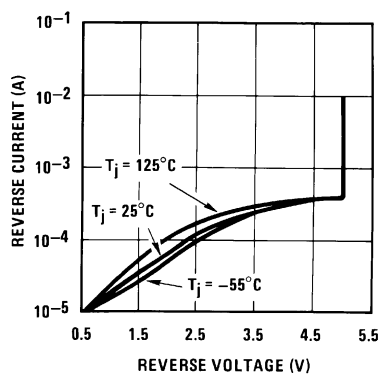


00571621

### Temperature Drift

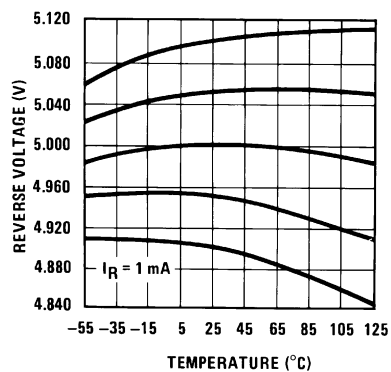

00571622

## Typical Performance Characteristics (Continued)

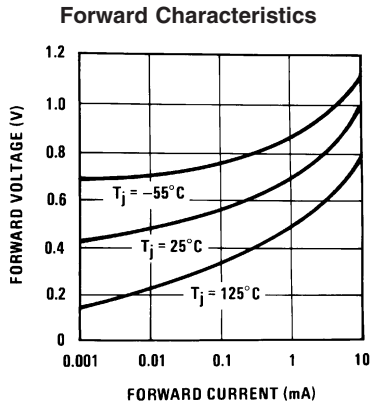


00571623

## Application Hints

The LM136-5.0 series voltage references are much easier to use than ordinary zener diodes. Their low impedance and wide operating current range simplify biasing in almost any circuit. Further, either the breakdown voltage or the temperature coefficient can be adjusted to optimize circuit performance.


Figure 1 shows an LM136-5.0 with a 10k potentiometer for adjusting the reverse breakdown voltage. With the addition of R1 the breakdown voltage can be adjusted without affecting the temperature coefficient of the device. The adjustment range is usually sufficient to adjust for both the initial device tolerance and inaccuracies in buffer circuitry.

If minimum temperature coefficient is desired, four diodes can be added in series with the adjustment potentiometer as shown in Figure 2. When the device is adjusted to 5.00V the temperature coefficient is minimized. Almost any silicon signal diode can be used for this purpose such as a 1N914, 1N4148 or a 1N457. For proper temperature compensation the diodes should be in the same thermal environment as the LM136-5.0. It is usually sufficient to mount the diodes near the LM136-5.0 on the printed circuit board. The absolute resistance of the network is not critical and any value from 2k to 20k will work. Because of the wide adjustment range, fixed resistors should be connected in series with the pot to make pot setting less critical.



00571609

**FIGURE 1. LM136-5.0 with Pot for Adjustment of Breakdown Voltage (Trim Range =  $\pm 1.0\text{V}$  Typical)**

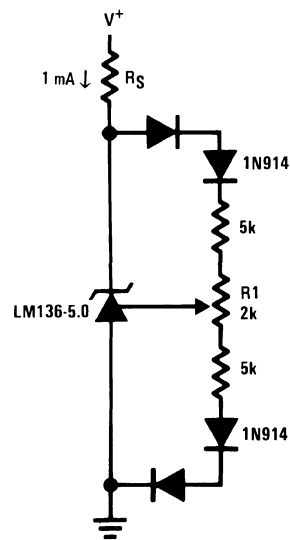


00571610

**FIGURE 2. Temperature Coefficient Adjustment (Trim Range =  $\pm 0.5\text{V}$  Typical)**


## Typical Applications

Precision Power Regulator with Low Temperature Coefficient

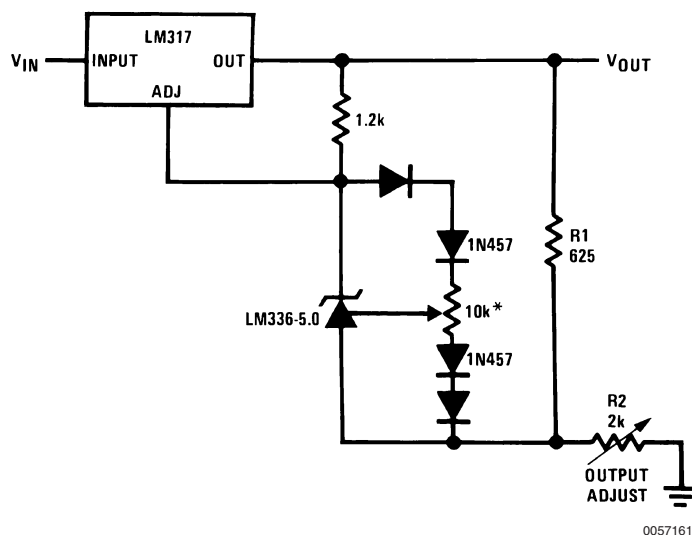


\* Adjust for 6.25V across R1


5V Crowbar

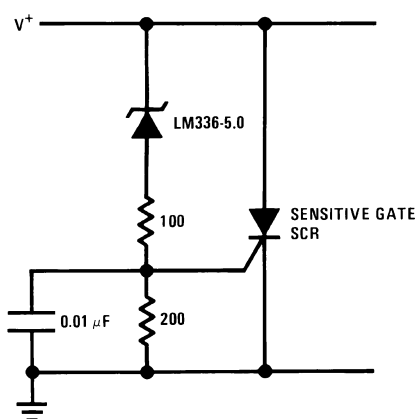

Adjustable Shunt Regulator

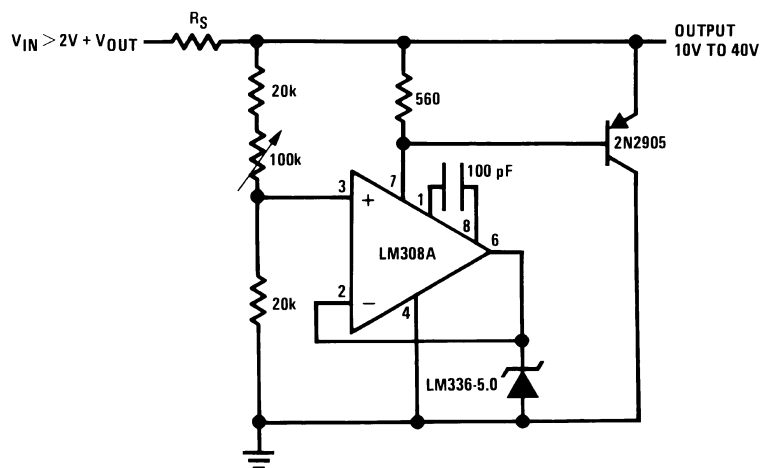


## Linear Ohmmeter

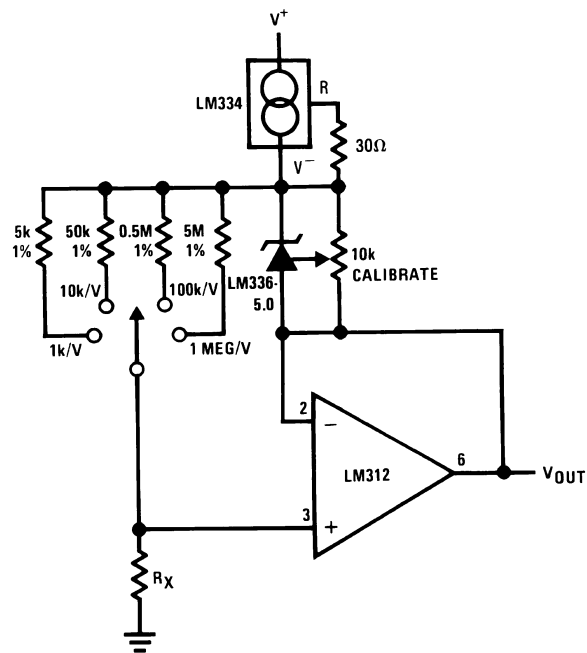

00571614

### Op Amp with Output Clamped

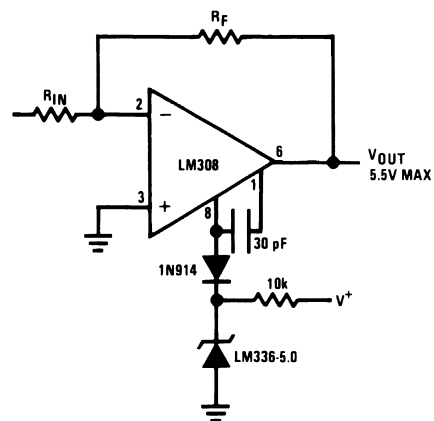


00571624

Downloaded from [DatasheetLib.com](https://www.datasheetlib.com) - datasheet search engine




## Typical Applications (Continued)

### Low Noise Buffered Reference

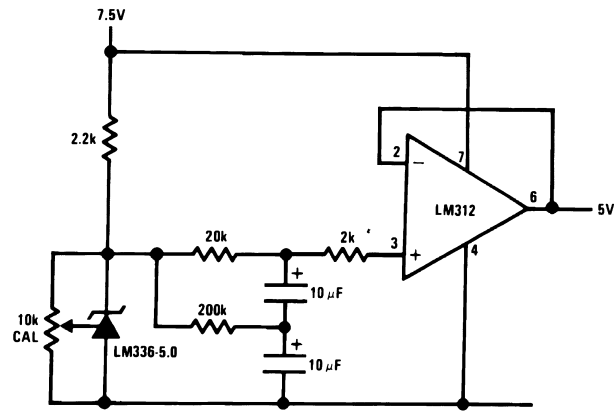


00571628

### Wide Input Range Reference



00571629


## Schematic Diagram

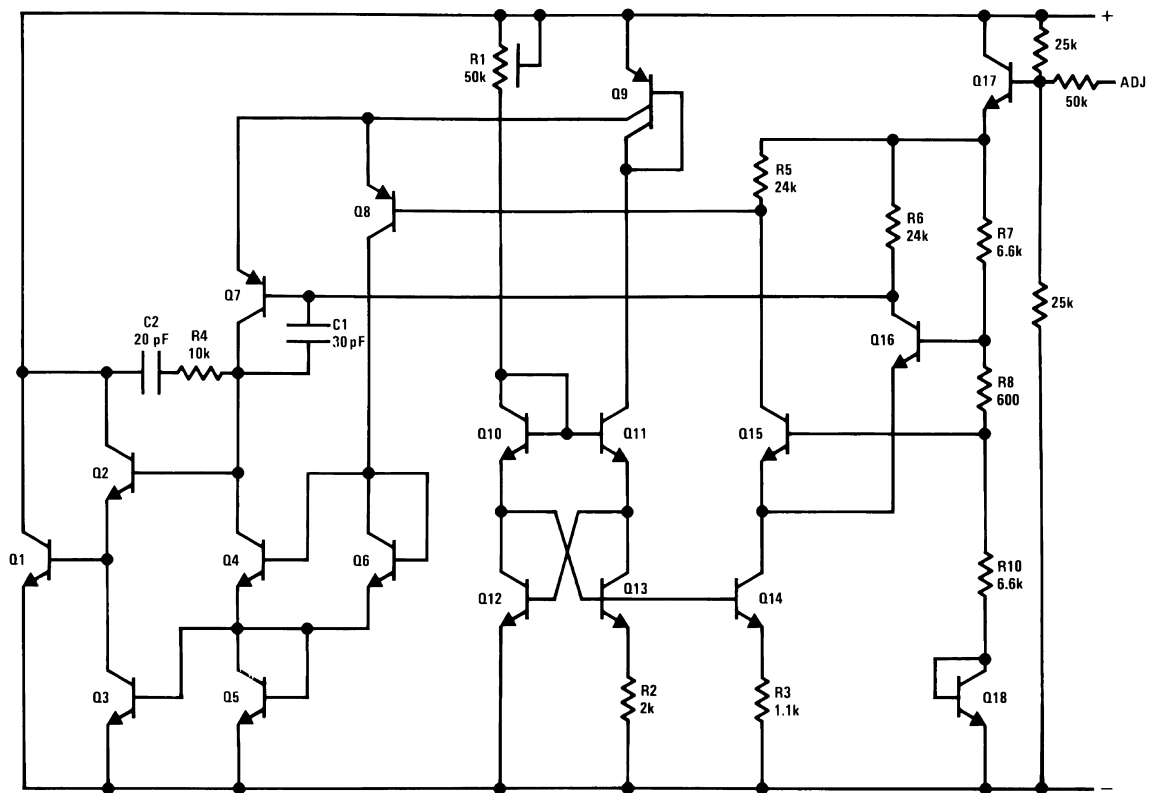

00571616



**Physical Dimensions** inches (millimeters)

unless otherwise noted

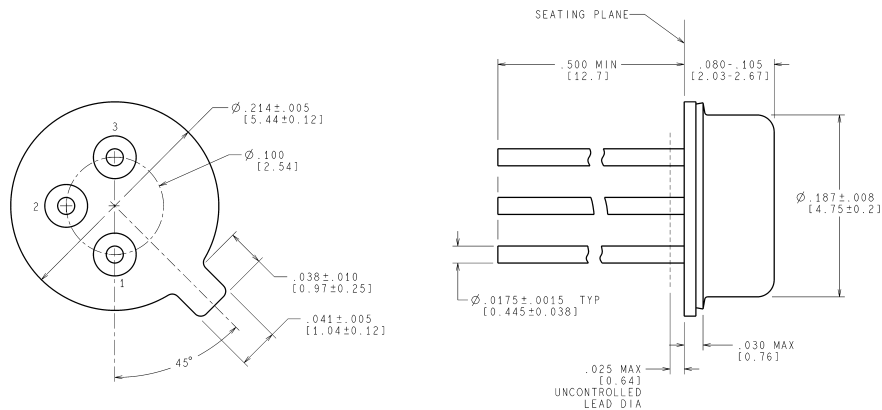
CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE IN MILLIMETERS

H03H (Rev F)

**TO-46 Metal Can Package (H)**  
**Order Number LM136H-5.0, LM136H-5.0/883, LM236H-5.0,**  
**LM136AH-5.0, LM136AH-5.0/883 or LM236AH-5.0**  
**NS Package Number H03H**

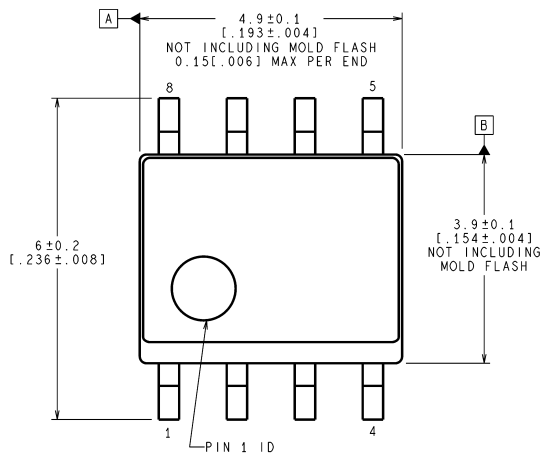

RECOMMENDED LAND PATTERN

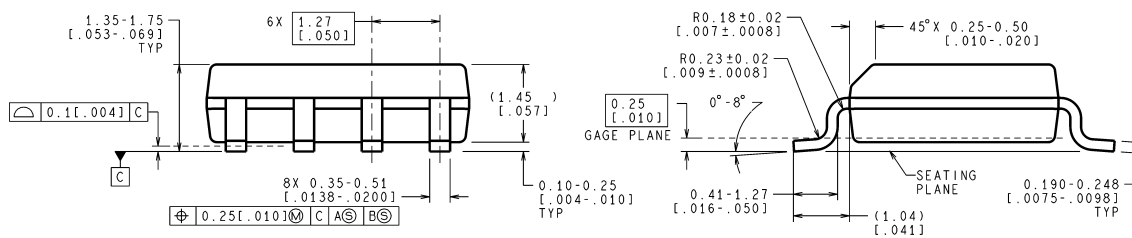CONTROLLING DIMENSION IS MILLIMETER  
VALUES IN [ ] ARE INCHES  
DIMENSIONS IN ( ) FOR REFERENCE ONLY

M08A (Rev K)

**Small Outline (SO-8) Package**  
**Order Number LM336M-5.0 or LM336BM-5.0**  
**NS Package Number M08A**

