


Aluminum Capacitors Radial Semi-Professional



Fig.1 Component outline.

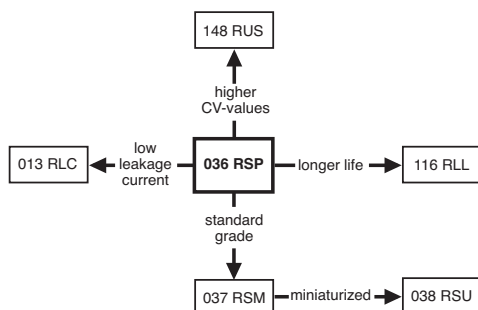

FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Radial leads, cylindrical aluminum case, all-insulated (light blue)
- Natural pitch 2.5 mm and 5 mm
- Charge and discharge proof
- Miniaturized, high CV-product per unit volume
- Reduced leakage current
- Lead (Pb)-free versions are RoHS compliant.



Available
RoHS*
COMPLIANT

APPLICATIONS

- Automotive, telecommunication, industrial, EDP and audio-video
- Coupling, decoupling, smoothing, filtering, buffering, timing
- Portable and mobile equipment (small size, low mass).

MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance (in μF).
- Tolerance on rated capacitance, code letter in accordance with IEC 60062 (M for $\pm 20\%$).
- Rated voltage (in V).
- Date code in accordance with IEC 60062.
- Code indicating factory of origin.
- Name of manufacturer.
- Minus-sign on top to identify the negative terminal.
- Series number (036).

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Nominal case sizes ($\varnothing D \times L$ in mm)	5×11 and 8.2×11
Rated capacitance range, C_R	0.47 to 470 μF
Tolerance on C_R	$\pm 20\%$; $\pm 10\%$ on request
Rated voltage range, U_R	6.3 to 160 V
Category temperature range	-55 to $+85$ $^{\circ}\text{C}$
Endurance test at 85 $^{\circ}\text{C}$	2000 hours
Useful life at 105 $^{\circ}\text{C}$	750 hours
Useful life at 85 $^{\circ}\text{C}$	3000 hours
Useful life at 40 $^{\circ}\text{C}$, $1.4 \times I_R$ applied	80000 hours
Shelf life at 0 V, 85 $^{\circ}\text{C}$	500 hours
Based on sectional specification	IEC 60384-4/EN130 300
Climatic category IEC 60068	55/085/56

SELECTION CHART FOR C_R , U_R AND RELEVANT NOMINAL CASE SIZES ($\varnothing D \times L$ in mm)

C_R (μF)	U_R (V)									
	6.3	10	16	25	35	40	50	63	100	160
0.47	–	–	–	–	–	–	–	5×11	–	–
1.0	–	–	–	–	–	–	–	5×11	–	–
2.2	–	–	–	–	–	–	–	5×11	–	8.2×11
3.3	–	–	–	–	–	–	–	5×11	–	–
4.7	–	–	–	–	–	–	–	5×11	–	8.2×11
6.8	–	–	–	–	–	–	–	5×11	–	–
10	–	–	–	–	–	–	5×11	5×11	8.2×11	–
15	–	–	–	–	–	5×11	–	5×11	–	–
22	–	–	–	–	5×11	–	–	5×11	8.2×11	–
33	–	–	5×11	–	–	–	5×11	8.2×11	–	–
47	–	5×11	–	–	5×11	–	8.2×11	8.2×11	–	–
68	–	–	–	5×11	–	8.2×11	–	8.2×11	–	–
100	5×11	–	5×11	8.2×11	–	–	8.2×11	–	–	–
150	–	5×11	8.2×11	–	8.2×11	–	–	–	–	–
220	–	8.2×11	8.2×11	8.2×11	–	–	–	–	–	–
330	8.2×11	–	8.2×11	–	–	–	–	–	–	–
470	–	8.2×11	–	–	–	–	–	–	–	–

* Pb containing terminations are not RoHS compliant, exemptions may apply

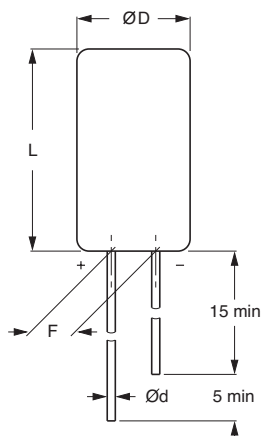
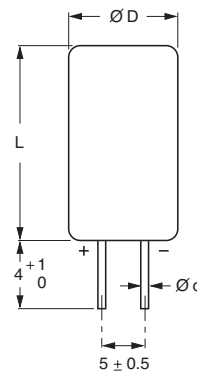
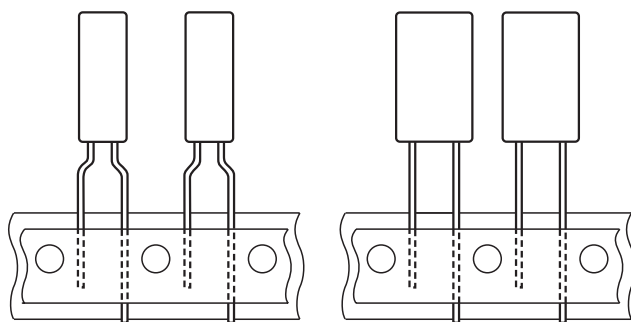

DIMENSIONS in millimeters **AND AVAILABLE FORMS**

Fig.2 **Form CA:** Long leads

Case $\varnothing D \times L = 8.2 \times 11$ mm only

Fig.3 **Form CB:** Cut leads


Pitch $F = 5$ mm.
Case $\varnothing D \times L = 5 \times 11$ and 8.2×11 mm.

Fig.4 **Form TFA:** Taped in box (AMMOPACK)


Pitch $F = 2.5$ mm.
Case $\varnothing D \times L = 5 \times 11$ mm only.

Fig.5 **Form TNA:** Taped in box (AMMOPACK)

Table 1

DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES								
NOMINAL CASE SIZE $\varnothing D \times L$	CASE CODE	$\varnothing d$	$\varnothing D_{max}$	L_{max}	F	MASS (g)	PACKAGING QUANTITIES	
							FORM CA, CB	FORM TFA, TNA
5 × 11	11	0.5	5.5	12	2.5 ± 0.5	≈ 0.4	1000	2000
8.2 × 11	13	0.6	8.7	12	5.0 ± 0.5	≈ 1.1	1000	1000

Note

1. Tape dimensions see section 'PACKAGING'.

ELECTRICAL DATA	
SYMBOL	DESCRIPTION
C_R	rated capacitance at 100 Hz, tolerance $\pm 20\%$
I_R	rated RMS ripple current at 100 Hz, 85 °C
I_{L1}	max. leakage current after 1 minute at U_R
$\tan \delta$	max. dissipation factor at 100 Hz
Z	max. impedance at 10 kHz and 20 °C

Note

1. Unless otherwise specified, all electrical values in Table 2 apply at $T_{amb} = 20\text{ °C}$, $P = 86$ to 106 kPa , $RH = 45$ to 75% .

Table 2

ELECTRICAL DATA AND ORDERING INFORMATION														
U _R (V)	C _R 100 Hz (μF)	NOMINAL CASE SIZE ØD × L (mm)	I _R 100 Hz 85 °C (mA)	I _{L1} 1 min (μA)	Tan δ 100 Hz	Z 10 kHz (Ω)	CATALOG NUMBER 2222 036							
							BULK PACKAGING				TAPED AMMOPACK			
							LONG LEADS		CUT LEADS		FORM TFA	F (mm)	FORM TNA	F (mm)
							FORM CA	F (mm)	FORM CB	F (mm)				
6.3	100 330	5 × 11 8.2 × 11	130 300	7 16	0.20 0.20	1.7 0.52	53101 53331	2.5 5.0	— 63331	— 5.0	33101 33331	5.0 5.0	73101 —	2.5 —
10	47	5 × 11	95	6	0.16	2.8	54479	2.5	—	—	34479	5.0	74479	2.5
	150	5 × 11	150	12	0.20	1.3	54151	2.5	—	—	34151	5.0	74151	2.5
	220	8.2 × 11	260	17	0.16	0.59	54221	5.0	64221	5.0	34221	5.0	—	—
	470	8.2 × 11	400	31	0.20	0.43	54471	5.0	64471	5.0	34471	5.0	—	—
16	33	5 × 11	90	7	0.14	2.7	55339	2.5	—	—	35339	5.0	75339	2.5
	100	5 × 11	160	13	0.16	1.6	55101	2.5	—	—	35101	5.0	75101	2.5
	150	8.2 × 11	230	18	0.14	0.6	55151	5.0	65151	5.0	35151	5.0	—	—
	220	8.2 × 11	280	24	0.16	0.55	55221	5.0	65221	5.0	35221	5.0	—	—
	330	8.2 × 11	390	35	0.16	0.48	55331	5.0	65331	5.0	35331	5.0	—	—
25	68	5 × 11	140	13	0.14	1.8	56689	2.5	—	—	36689	5.0	76689	2.5
	100	8.2 × 11	210	18	0.12	0.7	56101	5.0	66101	5.0	36101	5.0	—	—
	220	8.2 × 11	310	36	0.14	0.55	56221	5.0	66221	5.0	36221	5.0	—	—
35	22	5 × 11	87	8	0.10	2.7	90001	2.5	—	—	90027	5.0	90389	2.5
	47	5 × 11	130	13	0.12	1.9	90094	2.5	—	—	90098	5.0	90391	2.5
	150	8.2 × 11	270	35	0.12	0.6	90099	5.0	90101	5.0	90103	5.0	—	—
40	15	5 × 11	72	7	0.10	3.7	57159	2.5	—	—	37159	5.0	77159	2.5
	68	8.2 × 11	180	20	0.10	0.81	57689	5.0	67689	5.0	37689	5.0	—	—
50	10	5 × 11	60	6	0.08	4.5	90004	2.5	—	—	90028	5.0	90392	2.5
	33	5 × 11	110	13	0.10	2.1	90104	2.5	—	—	90108	5.0	90393	2.5
	47	8.2 × 11	160	18	0.08	0.96	90011	5.0	90012	5.0	90031	5.0	—	—
	100	8.2 × 11	250	33	0.10	0.7	90109	5.0	90111	5.0	90113	5.0	—	—
63	0.47	5 × 11	5	4	0.06	85	58477	2.5	—	—	38477	5.0	78477	2.5
	1.0	5 × 11	11	4	0.06	40	58108	2.5	—	—	38108	5.0	78108	2.5
	2.2	5 × 11	25	4	0.06	18	58228	2.5	—	—	38228	5.0	78228	2.5
	3.3	5 × 11	38	5	0.06	12	58338	2.5	—	—	38338	5.0	78338	2.5
	4.7	5 × 11	45	5	0.06	8.5	58478	2.5	—	—	38478	5.0	78478	2.5
	6.8	5 × 11	55	6	0.06	5.9	58688	2.5	—	—	38688	5.0	78688	2.5
	10	5 × 11	70	7	0.06	4.0	58109	2.5	—	—	38109	5.0	78109	2.5
	10	8.2 × 11	120	7	0.04	2.8	90036	5.0	90041	5.0	90181	5.0	—	—
	15	5 × 11	80	9	0.07	3.1	58159	2.5	—	—	38159	5.0	78159	2.5
	22	5 × 11	100	11	0.08	2.7	58229	2.5	—	—	38229	5.0	78229	2.5
	22	8.2 × 11	150	11	0.05	1.4	90117	5.0	90118	5.0	90139	5.0	—	—
	33	8.2 × 11	160	16	0.06	1.2	58339	5.0	68339	5.0	38339	5.0	—	—
	47	8.2 × 11	190	21	0.07	1.0	58479	5.0	68479	5.0	38479	5.0	—	—
	68	8.2 × 11	210	29	0.08	0.88	58689	5.0	68689	5.0	38689	5.0	—	—
	100	10	8.2 × 11	80	9	0.06	3.5	59109	5.0	69109	5.0	39109	5.0	—
22		8.2 × 11	110	16	0.06	1.8	59229	5.0	69229	5.0	39229	5.0	—	—
160	2.2	8.2 × 11	45	75	0.05	14	90333	5.0	90334	5.0	90336	5.0	—	—
	4.7	8.2 × 11	62	115	0.07	9.6	90337	5.0	90338	5.0	90341	5.0	—	—

ORDERING EXAMPLE*

Electrolytic capacitor 036 series


100 μF /16 V; $\pm 20\%$ Nominal case size: $\varnothing 5 \times 11\text{ mm}$; Form TFA

Catalog number: 2222 036 35101

* To ensure delivery of lead (Pb)-free parts during the transition period, please contact your Vishay sales agent.


ADDITIONAL ELECTRICAL DATA		
PARAMETER	CONDITIONS	VALUE
Voltage		
Surge voltage		$U_s \leq 1.15 U_R$
Reverse voltage		$U_{rev} \leq 1 V$
Current		
Leakage current	after 1 minute: $U_R = 6.3$ to $100 V$ $U_R = 160 V$	$I_{L1} \leq 0.006 C_R \times U_R + 3 \mu A$ $I_{L1} \leq 0.1 C_R \times U_R + 40 \mu A$
	after 5 minutes: $U_R = 6.3$ to $100 V$ $U_R = 160 V$	$I_{L5} \leq 0.001 C_R \times U_R + 3 \mu A$ $I_{L5} \leq 0.015 C_R \times U_R + 10 \mu A$
Inductance		
Equivalent series inductance (ESL)	case $\varnothing D \times L = 5 \times 11 mm$	typ. 13 nH
	case $\varnothing D \times L = 8.2 \times 11 mm$	typ. 16 nH
Resistance		
Equivalent series resistance (ESR)	calculated from $\tan \delta_{max}$ and C_R (see Table 2)	$ESR = \tan \delta / 2\pi f C_R$

CAPACITANCE (C)

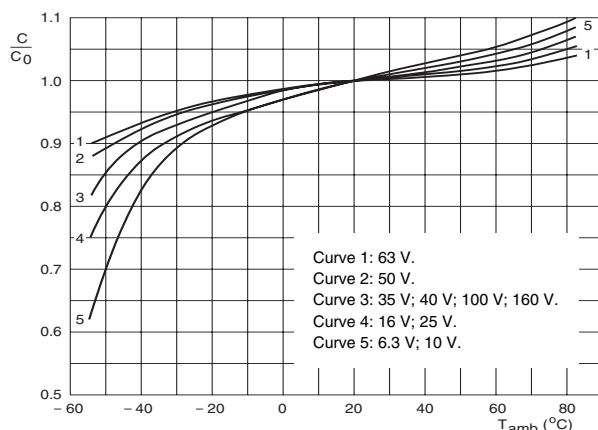

C_0 = capacitance at 20 $^{\circ}C$, 100 Hz.

Fig.6 Typical multiplier of capacitance as a function of ambient temperature.

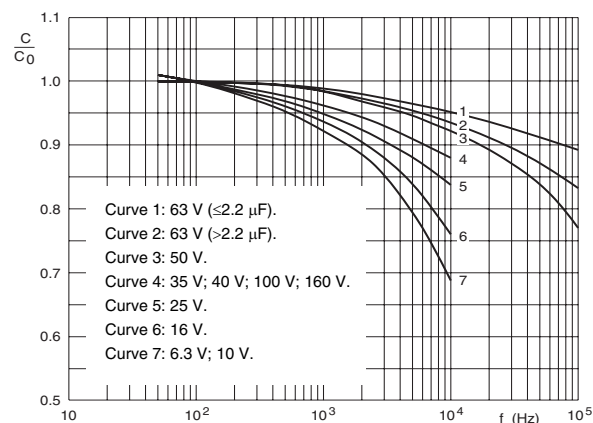


C_0 = capacitance at 20 $^{\circ}C$, 100 Hz.

$T_{amb} = 20^{\circ}C$.

Fig.7 Typical multiplier of capacitance as a function of frequency.


IMPEDANCE (Z)

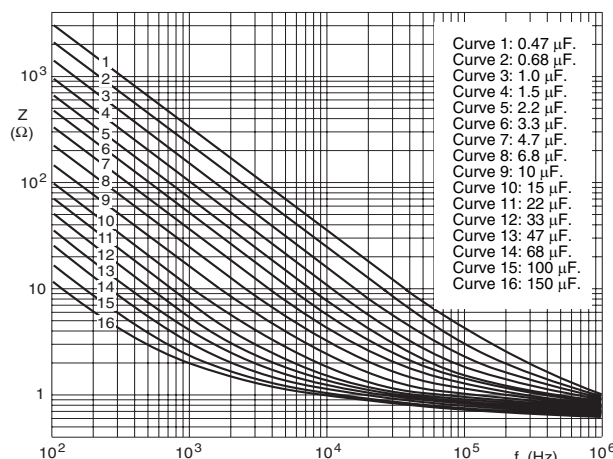

Case $\varnothing D \times L = 5 \times 11 mm$.

$T_{amb} = 20^{\circ}C$.

Fig.8 Typical impedance as a function of frequency.

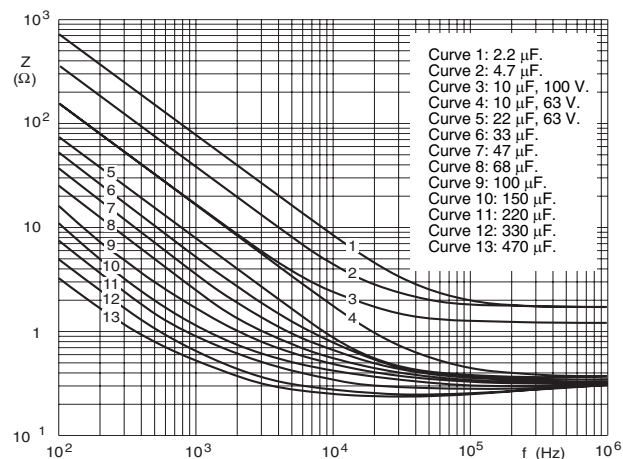

Case $\varnothing D \times L = 8.2 \times 11 mm$.

$T_{amb} = 20^{\circ}C$.

Fig.9 Typical impedance as a function of frequency.

RIPPLE CURRENT AND USEFUL LIFE

I_A = actual ripple current at 100 Hz.
 I_R = rated ripple current at 100 Hz, 85 °C.
 (1) Useful life at 85 °C and I_R applied: 3000 hours.

Fig.10 Multiplier of useful life as a function of ambient temperature and ripple current load.

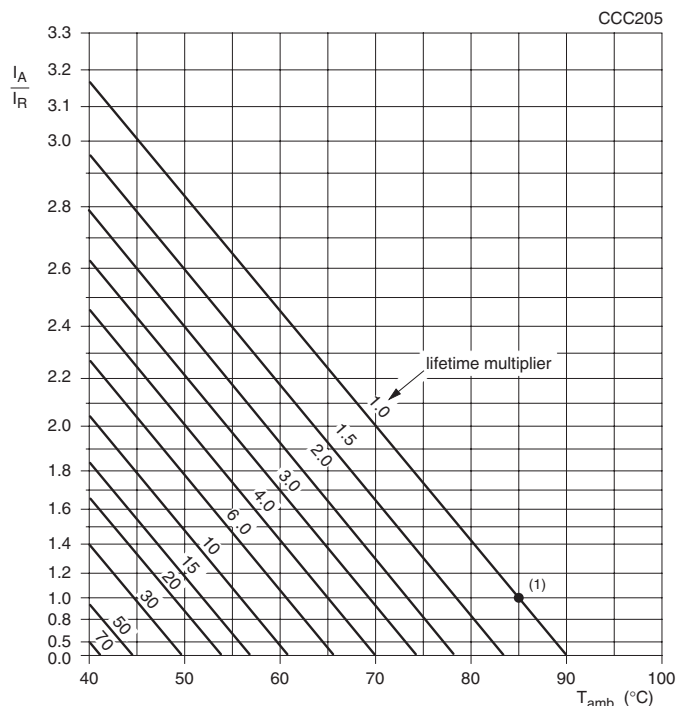


Table 3

MULTIPLIER OF RIPPLE CURRENT (I_R) AS A FUNCTION OF FREQUENCY			
FREQUENCY (Hz)	I_R MULTIPLIER		
	$U_R = 6.3$ to 10 V	$U_R = 16$ to 35 V	$U_R = 40$ to 160 V
50	0.90	0.85	0.80
100	1.00	1.00	1.00
300	1.12	1.20	1.25
1000	1.20	1.30	1.40
3000	1.25	1.35	1.50
≥ 10000	1.30	1.40	1.60

Table 4

TEST PROCEDURES AND REQUIREMENTS			
TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 60384-4/ EN130300 subclause 4.13	$T_{amb} = 85$ °C; U_R applied; 2000 hours	$U_R \leq 6.3$ V; $\Delta C/C$: +15/-30% $U_R > 6.3$ V; $\Delta C/C$: $\pm 15\%$ $\tan \delta \leq 1.3 \times \text{spec. limit}$ $Z \leq 2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$
Useful life	CECC 30301 subclause 1.8.1	$T_{amb} = 85$ °C; U_R and I_R applied; 3000 hours	$U_R \leq 6.3$ V; $\Delta C/C$: +45/-50% $U_R > 6.3$ V; $\Delta C/C$: $\pm 45\%$ $\tan \delta \leq 3 \times \text{spec. limit}$ $Z \leq 3 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ no short or open circuit total failure percentage: $\leq 1\%$
Shelf life (storage at high temperature)	IEC 60384-4/ EN130300 subclause 4.17	$T_{amb} = 85$ °C; no voltage applied; 500 hours after test: U_R to be applied for 30 minutes, 24 to 48 hours before measurement	$\Delta C/C$, $\tan \delta$, Z : for requirements see 'Endurance test' above $I_{L5} \leq \text{spec. limit}$



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.