


# Piezoelectric Sound Components

## PIEZOELECTRIC SOUND COMPONENTS

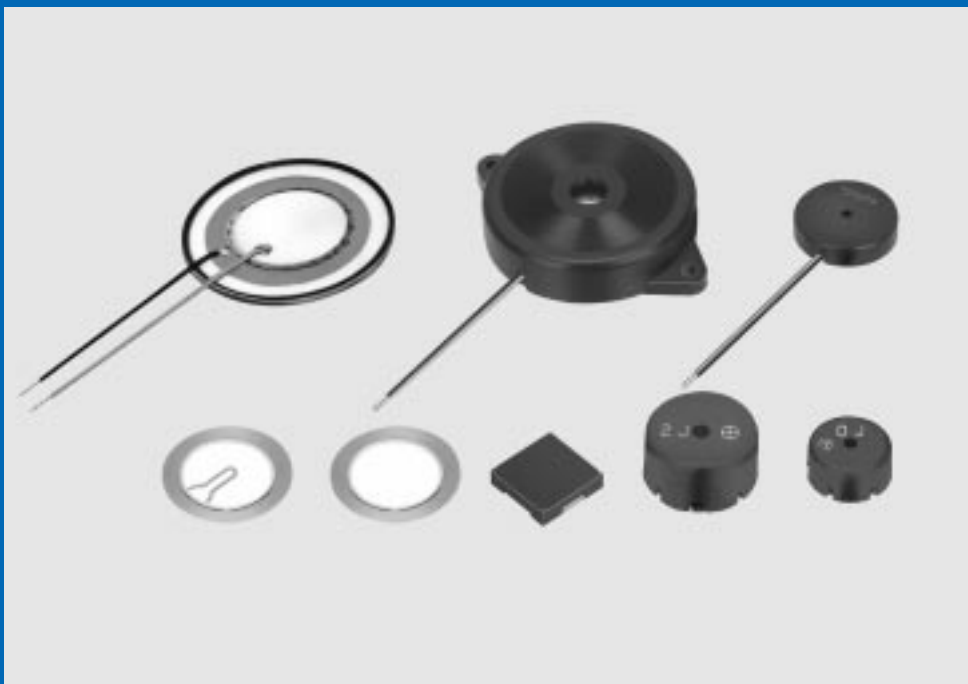

# CONTENTS

PIEZORINGER®, CERAMITONE® and "PIEZORINGER" in this catalog are the trademarks of Murata Manufacturing Co., Ltd.

|                                                                |    |
|----------------------------------------------------------------|----|
| <b>Part Numbering</b>                                          | 2  |
| <b>Application Matrix</b>                                      | 5  |
| <b>1 Piezoelectric Diaphragms</b>                              | 6  |
| <b>External Drive Type</b>                                     | 6  |
| <b>Self Drive Type</b>                                         | 7  |
| ● Piezoelectric Diaphragms Notice                              | 8  |
| <b>2 Piezoelectric Sounders External Drive Pin Type</b>        | 9  |
| <b>3 Piezoelectric Sounders External Drive Pin Type Taping</b> | 15 |
| <b>4 Piezoelectric Sounders External Drive Lead Wire Type</b>  | 17 |
| <b>5 Piezoelectric Sounders External Drive SMD Type</b>        | 19 |
| <b>Piezoelectric Sounders (External Drive) Circuit/Notice</b>  | 21 |
| <b>6 Piezoelectric Ringers (PIEZORINGER®)</b>                  | 22 |
| <b>Pin Type</b>                                                | 23 |
| <b>Lead Wire Type</b>                                          | 23 |
| ● Piezoelectric Ringers (PIEZORINGER®) Notice                  | 25 |
| <b>7 Piezoelectric Sounders Self Drive Pin Type</b>            | 26 |
| ● Piezoelectric Sounders (Self Drive) Notice                   | 27 |
| <b>8 Piezoelectric Buzzers</b>                                 | 28 |
| <b>Pin Type</b>                                                | 29 |
| <b>Lead Wire Type</b>                                          | 29 |
| ● Piezoelectric Buzzers Notice                                 | 30 |
| <b>9 Piezoelectric Receiver</b>                                | 31 |
| ● Piezoelectric Receiver Circuit/Notice                        | 33 |
| <b>10 Piezoelectric Speakers (CERAMITONE®)</b>                 | 34 |
| ● Piezoelectric Speakers (CERAMITONE®) Notice                  | 36 |
| <b>Package</b>                                                 | 37 |

## ● Part Numbering (The structure of the "Global Part Numbers" that have been adopted since June 2001 and the meaning of each code are described herein.) If you have any questions about details, inquire at your usual Murata sales office or distributor.

### Piezoelectric Sounders/Piezoelectric Buzzers/Piezoelectric Ringers(PIEZORINGER®)

(Global Part Number) 

|    |   |    |   |   |   |     |    |   |     |
|----|---|----|---|---|---|-----|----|---|-----|
| PK | M | 13 | E | P | Y | -40 | 00 | P | -A0 |
| ①  | ② | ③  | ④ | ⑤ | ⑥ | ⑦   | ⑧  | ⑨ | ⑩   |

#### ① Product ID

| Product ID |                                |
|------------|--------------------------------|
| PK         | Piezoelectric Sound Components |

#### ② Product

| Code | Product         |
|------|-----------------|
| M    | Sounder, Ringer |
| B    | Buzzer          |

#### ③ Outer Dimensions

Expressed by two figures in mm.

Ex.)

| Code | Outer Dimensions |
|------|------------------|
| 13   | ø12.6mm          |

#### ④ Drive

| Code | Drive          |
|------|----------------|
| E    | External-Drive |
| S    | Self-Drive     |

#### ⑤ Outer Electrode Style

| Code | Outer Electrode Style |
|------|-----------------------|
| P    | Pin Type              |
| W    | Lead Wire Type        |

#### ⑥ Structure

| Code | Structure                      |
|------|--------------------------------|
| T    | Standing Type                  |
| P    | Flat Type Auto-assemble        |
| Y    | Flat Type/Available for Taping |
| C    | Flat Type/Semi-auto-assemble   |

#### ⑦ Oscillating Frequency Type

| Code | Oscillating Frequency Type                                              |
|------|-------------------------------------------------------------------------|
| -40  | A hyphen (-) plus two-digit figures express Oscillating Frequency type. |

If there is no decimal point, the decimal point is omitted.

#### ⑧ Individual Specification Code

| Code | Individual Specification Code                                 |
|------|---------------------------------------------------------------|
| 00   | Two digits express specific specification in characteristics. |

#### ⑨ Special Quality Guarantee

| Code | Special Quality Guarantee |
|------|---------------------------|
| P    | Post Plated Terminal      |
| —    | Omitted                   |

#### ⑩ Packaging

| Code | Packaging     |
|------|---------------|
| -B0  | Bulk          |
| -A0  | Radial Taping |
| -M0  | Magazine      |

Radial taping or magazine are not available for all types.  
Please contact us.

### SMD Piezoelectric Sounder

(Global Part Number) 

|    |     |      |   |    |    |     |
|----|-----|------|---|----|----|-----|
| PK | LCS | 1212 | E | 40 | 01 | -R1 |
| ①  | ②   | ③    | ④ | ⑤  | ⑥  | ⑦   |

#### ① Product ID

| Product ID |                                |
|------------|--------------------------------|
| PK         | Piezoelectric Sound Components |

#### ② Product

| Code | Product     |
|------|-------------|
| LCS  | SMD Sounder |

#### ③ Dimensions

| Code | Outer Dimensions |
|------|------------------|
| 1212 | □12mm            |

#### ④ Drive

| Code |                |
|------|----------------|
| E    | External Drive |

#### ⑤ Oscillating Frequency Type

| Code |                                                                         |
|------|-------------------------------------------------------------------------|
| 40   | A hyphen (-) plus two-digit figures express Oscillating Frequency type. |

#### ⑥ Individual Specification Code

| Code | Individual Specification Code                                |
|------|--------------------------------------------------------------|
| 01   | Two digit express specific specification in characteristics. |

#### ⑦ Packaging

| Code | Packaging      |
|------|----------------|
| -R1  | Plastic taping |

SMD Piezoelectric Receiver

(Global Part Number) 

|    |     |      |   |    |    |     |
|----|-----|------|---|----|----|-----|
| PK | LCD | 1212 | E | 10 | 00 | -R1 |
| 1  | 2   | 3    | 4 | 5  | 6  | 7   |

1Product ID

| Product ID |                                |
|------------|--------------------------------|
| PK         | Piezoelectric Sound Components |

2Product

| Code | Product      |
|------|--------------|
| LCD  | SMD Receiver |

3Dimensions

| Code | Outer Dimensions |
|------|------------------|
| 1212 | □12mm            |

4Drive

| Code |          |
|------|----------|
| R    | Receiver |

5Oscillating Frequency Type

| Code |                                                                         |
|------|-------------------------------------------------------------------------|
| 10   | A hyphen (-) plus two-digit figures express Oscillating Frequency type. |

6Individual Specification Code

| Code | Individual Specification Code                                |
|------|--------------------------------------------------------------|
| 00   | Two digit express specific specification in characteristics. |

7Packaging

| Code | Packaging      |
|------|----------------|
| -R1  | Plastic taping |

## Piezoelectric Diaphragms

(Global Part Number) 

|   |   |   |       |    |      |   |   |    |
|---|---|---|-------|----|------|---|---|----|
| 7 | N | B | -31R2 | DM | -1R5 |   | A | 10 |
| 1 | 2 | 3 | 4     | 5  | 6    | 7 | 8 | 9  |

### ① Product ID(1)

| Product ID(1) | Ceramic Material |
|---------------|------------------|
| 7             | A2               |

### ② Product(2)

| Product ID(2) | Metal Plate Material |
|---------------|----------------------|
| B             | Brass                |
| N             | Nickel Alloy         |
| M             | Ni Plated Iron       |
| S             | SUS                  |

### ③ Product

| Code | Product                  |
|------|--------------------------|
| B    | Piezoelectric Diaphragms |

### ④ Metal Plate Diameter

| Code  | Metal Plate Diameter                                                                                                                     |
|-------|------------------------------------------------------------------------------------------------------------------------------------------|
| -31R2 | A hyphen (-) plus four-digit alphanumerics express metal plate outer dimensions. A decimal point is expressed by the capital letter "R". |

If there is no decimal point, the decimal point code is omitted.

### ⑤ Form of Piezoelectric Style

| Code | Form of Piezoelectric Style           |
|------|---------------------------------------|
| DM   | Two digits express shape of ceramics. |

For an Ag electrode, this digit remains blank, the corresponding code is omitted.

## Piezoelectric Speakers (CERAMITONE®)

(Global Part Number) 

|    |   |    |   |   |     |    |   |
|----|---|----|---|---|-----|----|---|
| VS | B | 35 | E | W | -07 | 01 | B |
| 1  | 2 | 3  | 4 | 5 | 6   | 7  | 8 |

### ① Product ID

| Product ID |                        |
|------------|------------------------|
| VS         | Piezoelectric Speakers |

### ② Product

| Code | Product                  |
|------|--------------------------|
| B    | Piezoelectric Diaphragms |

### ③ Outer Dimensions

| Code | Outer Dimensions |
|------|------------------|
| 35   | ø35mm            |
| 50   | ø50mm            |

### ④ Drive

| Code | Drive          |
|------|----------------|
| E    | External Drive |

### ⑥ Resonant Frequency Type

| Code | Resonant Frequency (kHz)                                                                                                       |
|------|--------------------------------------------------------------------------------------------------------------------------------|
| -1R5 | A hyphen (-) and three-digit alphanumerics express resonant frequency. A decimal point is expressed by the capital letter "R". |

If there is no decimal point, the decimal point is omitted.

### ⑦ With Feedback Electrode

| Code | With Feedback Electrode    |
|------|----------------------------|
| C    | With Feedback Electrode    |
| —    | without Feedback Electrode |

### ⑧ Product Specification

| Code | Product Specification |
|------|-----------------------|
| A    | With lead             |
| —    | No lead (omitted)     |

### ⑨ Individual Specification Code

| Code | Individual Specification Code                                                         |
|------|---------------------------------------------------------------------------------------|
| 10   | These digits express a lead length, lead number, and presence/absence of a connector. |

If the product has no individual specification, the corresponding code is omitted.

### ⑤ Outer Electrode Style

| Code | Outer Electrode Style |
|------|-----------------------|
| W    | Lead Wire Type        |

### ⑥ Resonant Frequency Type

| Code | Resonant Frequency             |
|------|--------------------------------|
| -03  | 1st Resonant Frequency : 300Hz |
| -07  | 1st Resonant Frequency : 700Hz |

### ⑦ Individual Specification Code

| Code | Individual Specification Code  |
|------|--------------------------------|
| 01   | Characteristics, Style, others |

### ⑧ Numbers of Ceramic

| Code | Numbers of Ceramic                                         |
|------|------------------------------------------------------------|
| B    | Two Elements<br>(The code is omitted when element is one.) |

## Application Matrix

|                         |                     | Application<br>Part Number | Tele-<br>phone | Watch | Clock | Medical<br>Equip-<br>ment | Gas<br>Alarm | Camera | Toy | Bar<br>Code<br>Scanner | Type-<br>Writer | Printer | Note-<br>PC<br>PDA | DVD-<br>Player | Micro-<br>Wave<br>Oven | Air<br>Condi-<br>tioner | Fan<br>Heater |
|-------------------------|---------------------|----------------------------|----------------|-------|-------|---------------------------|--------------|--------|-----|------------------------|-----------------|---------|--------------------|----------------|------------------------|-------------------------|---------------|
| Piezoelectric Diaphragm | External Drive Type | 7BB-12-9                   |                | ●     | ●     | ●                         |              | ●      | ●   |                        |                 |         | ●                  |                |                        |                         |               |
|                         |                     | 7BB-15-6                   |                |       | ●     | ●                         |              | ●      | ●   |                        |                 |         | ●                  |                |                        |                         |               |
|                         |                     | 7BB-20-3                   | ●              | ●     | ●     | ●                         |              |        | ●   | ●                      |                 |         |                    |                |                        |                         |               |
|                         |                     | 7BB-20-4                   | ●              | ●     | ●     | ●                         |              | ●      | ●   | ●                      |                 |         |                    |                |                        |                         |               |
|                         |                     | 7BB-20-6                   |                |       | ●     | ●                         |              | ●      | ●   |                        |                 |         | ●                  |                |                        |                         |               |
|                         |                     | 7BB-20-6A0                 |                |       | ●     | ●                         |              |        | ●   |                        |                 |         | ●                  |                |                        |                         |               |
|                         |                     | 7BB-27-4                   | ●              |       | ●     | ●                         |              |        | ●   | ●                      |                 |         |                    |                |                        |                         |               |
|                         |                     | 7BB-27-4A0                 | ●              |       | ●     | ●                         |              |        | ●   | ●                      |                 |         |                    |                |                        |                         |               |
|                         |                     | 7BB-35-3                   | ●              |       | ●     |                           |              |        | ●   | ●                      |                 |         |                    |                |                        |                         |               |
|                         |                     | 7BB-35-3A0                 | ●              |       | ●     |                           |              |        | ●   | ●                      |                 |         |                    |                |                        |                         |               |
|                         |                     | 7BB-41-2                   | ●              |       |       |                           |              |        |     |                        |                 |         |                    |                |                        |                         |               |
|                         |                     | 7BB-41-2A0                 | ●              |       |       |                           |              |        |     |                        |                 |         |                    |                |                        |                         |               |
|                         |                     | 7BB-50M-1                  | ●              |       |       |                           |              |        |     |                        |                 |         |                    |                |                        |                         |               |
|                         | Self Drive Type     | 7SB-20-7                   |                | ●     | ●     | ●                         |              | ●      |     |                        |                 |         | ●                  |                |                        |                         |               |
|                         |                     | 7BB-20-6C                  | ●              |       |       |                           |              | ●      | ●   |                        |                 |         |                    |                |                        |                         |               |
|                         |                     | 7BB-20-6CA0                | ●              |       |       |                           |              | ●      | ●   |                        |                 |         |                    |                |                        |                         |               |
|                         |                     | 7BB-27-3C                  | ●              |       |       |                           | ●            |        | ●   |                        |                 |         |                    |                |                        |                         |               |
|                         |                     | 7BB-27-4C                  | ●              |       |       |                           | ●            |        | ●   | ●                      |                 |         |                    |                |                        |                         |               |
|                         |                     | 7BB-27-4CA0                | ●              |       |       |                           | ●            |        | ●   | ●                      |                 |         |                    |                |                        |                         |               |
|                         |                     | 7BB-35-3C                  | ●              |       |       |                           | ●            |        |     | ●                      |                 |         |                    |                |                        |                         |               |
|                         |                     | 7BB-35-3CA0                | ●              |       |       |                           | ●            |        |     | ●                      |                 |         |                    |                |                        |                         |               |
|                         |                     | 7BB-41-20                  | ●              |       |       |                           |              |        |     |                        |                 |         |                    |                |                        |                         |               |
|                         |                     | 7BB-41-2CA0                | ●              |       |       |                           |              |        |     |                        |                 |         |                    |                |                        |                         |               |
|                         |                     | 7NB-27-2C                  | ●              |       |       |                           |              |        |     |                        |                 |         |                    |                |                        |                         |               |
|                         |                     | 7NB-27-3C                  | ●              |       |       |                           | ●            |        |     |                        |                 |         |                    |                |                        |                         |               |
|                         |                     | 7NB-27-4C                  | ●              |       |       |                           | ●            |        |     |                        |                 |         |                    |                |                        |                         |               |
|                         |                     | 7SB-34R7-3C                |                |       |       |                           | ●            |        |     |                        |                 |         |                    |                |                        |                         |               |
| Piezoelectric Sounder   | External Drive Type | PKM13EPY-4000-A0           | ●              |       | ●     | ●                         |              | ●      | ●   | ●                      | ●               | ●       | ●                  | ●              |                        | ●                       | ●             |
|                         |                     | PKM13EPY-4002-B0           | ●              |       | ●     | ●                         |              | ●      | ●   | ●                      | ●               | ●       | ●                  | ●              | ●                      | ●                       | ●             |
|                         |                     | PKM17EPP-2002-B0           | ●              |       | ●     | ●                         |              |        | ●   | ●                      | ●               | ●       |                    | ●              | ●                      | ●                       | ●             |
|                         |                     | PKM17EPP-4001-B0           | ●              |       | ●     | ●                         |              |        | ●   | ●                      | ●               | ●       |                    | ●              | ●                      | ●                       | ●             |
|                         |                     | PKM17EPT-4001-B0           |                |       |       |                           |              |        | ●   |                        | ●               | ●       |                    | ●              | ●                      | ●                       | ●             |
|                         |                     | PKM17EW-2001               | ●              |       | ●     | ●                         |              | ●      | ●   | ●                      | ●               | ●       | ●                  | ●              |                        | ●                       |               |
|                         |                     | PKM22EP-2001               |                |       |       |                           |              |        | ●   |                        | ●               | ●       |                    | ●              | ●                      | ●                       | ●             |
|                         |                     | PKM22EPP-2001-B0           | ●              |       | ●     | ●                         |              |        | ●   |                        | ●               | ●       |                    | ●              | ●                      | ●                       | ●             |
|                         |                     | PKM22EPP-4001-B0           | ●              |       | ●     | ●                         |              |        | ●   |                        | ●               | ●       |                    | ●              | ●                      | ●                       | ●             |
|                         |                     | PKM22EPP-4005-B0           | ●              |       | ●     | ●                         |              |        | ●   |                        | ●               | ●       |                    | ●              | ●                      | ●                       | ●             |
|                         |                     | PKM22EPP-4007-B0           | ●              |       | ●     | ●                         |              |        | ●   |                        | ●               | ●       |                    | ●              | ●                      | ●                       | ●             |
|                         |                     | PKM22EPT-2001-B0           |                |       |       |                           |              |        | ●   |                        | ●               | ●       |                    | ●              | ●                      | ●                       | ●             |
|                         |                     | PKM22EPT-4001-B0           |                |       |       |                           |              |        | ●   |                        | ●               | ●       |                    | ●              | ●                      | ●                       | ●             |
|                         |                     | PKM17EW-4000               | ●              |       | ●     | ●                         |              | ●      | ●   | ●                      | ●               | ●       | ●                  | ●              |                        | ●                       |               |
|                         |                     | PKLCS1212E4001-R1          | ●              |       |       | ●                         |              | ●      | ●   | ●                      | ●               | ●       | ●                  |                |                        | ●                       |               |
|                         | Self Drive Type     | PKM24SP-3805               | ●              |       |       |                           | ●            |        | ●   |                        |                 |         |                    |                | ●                      | ●                       | ●             |
|                         |                     | PKM30SPT-2001-B0           |                |       |       |                           |              |        | ●   |                        |                 | ●       | ●                  |                | ●                      |                         |               |
|                         |                     | PKM30SPT-2501-B0           |                |       |       |                           |              |        | ●   |                        |                 | ●       | ●                  |                |                        |                         |               |
| Piezoelectric Buzzer    |                     | PKB24SPC-3601-B0           | ●              |       |       | ●                         |              |        | ●   |                        | ●               | ●       | ●                  | ●              |                        | ●                       | ●             |
|                         |                     | PKB24SW-3301               | ●              |       | ●     |                           |              |        | ●   |                        | ●               | ●       | ●                  |                | ●                      | ●                       | ●             |
|                         |                     | PKB30SPC-2001-B0           | ●              |       |       |                           | ●            |        | ●   |                        | ●               | ●       | ●                  |                | ●                      | ●                       | ●             |
|                         |                     | PKB30SPC-3001-B0           | ●              |       |       |                           | ●            |        | ●   |                        | ●               | ●       | ●                  |                | ●                      | ●                       | ●             |
| Piezoelectric Ringer    |                     | PKM33EP-1201C              | ●              |       |       |                           |              |        |     |                        |                 |         |                    |                |                        |                         |               |
|                         |                     | PKM34EW-1101C              | ●              |       |       |                           |              |        |     |                        |                 |         |                    |                |                        |                         |               |
|                         |                     | PKM34EW-1201C              | ●              |       |       |                           |              |        |     |                        |                 |         |                    |                |                        |                         |               |
|                         |                     | PKM44EP-0901               | ●              |       |       |                           |              |        |     |                        |                 |         |                    |                |                        |                         |               |
|                         |                     | PKM44EW-1001C              | ●              |       |       |                           |              |        |     |                        |                 |         |                    |                |                        |                         |               |
| Piezoelectric Receiver  |                     | PKLCD1212R1000-R1          | ●              |       |       |                           |              |        |     |                        |                 |         |                    |                |                        |                         |               |
| Piezoelectric Speaker   |                     | VSB35EW-0701B              | ●              |       |       |                           |              |        | ●   |                        |                 |         |                    |                |                        |                         |               |
|                         |                     | VSB50EW-0301B              | ●              |       |       |                           |              |        | ●   |                        |                 |         |                    |                |                        |                         |               |

There are various applications besides above table.

Fire Alarm, Burglar Alarm, Laundry Machine, Bath, Interphone, Chime, Pager, Back Buzzer, ME Instruments, Measuring Instruments, Vending Machine, Calculator, Automobile, Communication Radio, Hemadynamometer, Thermometer, Running meter, Facsimile, Audio timer, Automatic Controlling Devices.

# Piezoelectric Sound Components




## Piezoelectric Diaphragms

### ■ Features

1. Low power consumption.
2. No contacts therefore, no noise and highly reliable.


### ■ Applications

- Telephone ringers.
- Various office equipment such as PPCs, printers and keyboards.
- Various home appliances such as microwave ovens.
- Confirmation sound of various audio equipment.

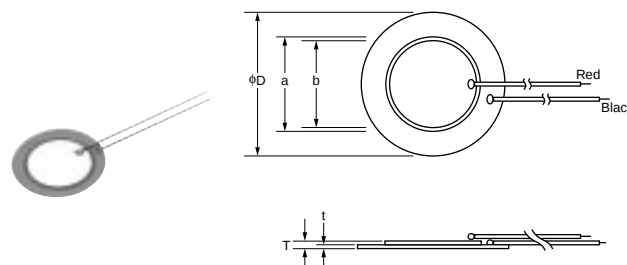

### External Drive Type

| Part Number | Resonant Frequency (kHz) | Resonant Impedance (ohm) | Capacitance (nF) | Plate Size dia D (mm) (dia) | Element Size a (mm) (dia) | Electrode Size b (mm) (dia) | Thickness T (mm) | Plate Thickness t (mm) | Plate Material         |
|-------------|--------------------------|--------------------------|------------------|-----------------------------|---------------------------|-----------------------------|------------------|------------------------|------------------------|
| 7BB-12-9    | 9.0 ±1.0kHz              | 1000 max.                | 8 ±30% [1kHz]    | 12.0                        | 9.0                       | 8.0                         | 0.22             | 0.10                   | Brass                  |
| 7BB-15-6    | 6.0 ±1.0kHz              | 350 max.                 | 10 ±30% [1kHz]   | 15.0                        | 10.0                      | 9.0                         | 0.22             | 0.10                   | Brass                  |
| 7BB-20-3    | 3.6 ±0.6kHz              | 500 max.                 | 20 ±30% [1kHz]   | 20.0                        | 14.0                      | 12.8                        | 0.22             | 0.10                   | Brass                  |
| 7BB-20-6    | 6.3 ±0.6kHz              | 350 max.                 | 10 ±30% [1kHz]   | 20.0                        | 14.0                      | 12.8                        | 0.42             | 0.20                   | Brass                  |
| 7BB-20-6A0  | 6.3 ±0.6kHz              | 1000 max.                | 10 ±30% [1kHz]   | 20.0                        | 14.0                      | 12.8                        | 0.42             | 0.20                   | Brass (with Lead Wire) |
| 7BB-27-4    | 4.6 ±0.5kHz              | 200 max.                 | 20 ±30% [1kHz]   | 27.0                        | 19.7                      | 18.2                        | 0.54             | 0.30                   | Brass                  |
| 7BB-27-4A0  | 4.6 ±0.5kHz              | 300 max.                 | 20 ±30% [1kHz]   | 27.0                        | 19.7                      | 18.2                        | 0.54             | 0.30                   | Brass (with Lead Wire) |
| 7BB-35-3    | 2.8 ±0.5kHz              | 200 max.                 | 30 ±30% [1kHz]   | 35.0                        | 25.0                      | 23.0                        | 0.53             | 0.30                   | Brass                  |
| 7BB-35-3A0  | 2.8 ±0.5kHz              | 200 max.                 | 30 ±30% [1kHz]   | 35.0                        | 25.0                      | 23.0                        | 0.53             | 0.30                   | Brass (with Lead Wire) |
| 7BB-41-2    | 2.2 ±0.3kHz              | 250 max.                 | 30 ±30% [1kHz]   | 41.0                        | 25.0                      | 23.0                        | 0.63             | 0.40                   | Brass                  |
| 7BB-41-2A0  | 2.2 ±0.3kHz              | 300 max.                 | 30 ±30% [1kHz]   | 41.0                        | 25.0                      | 23.0                        | 0.63             | 0.40                   | Brass (with Lead Wire) |
| 7BB-50M-1   | 1.0 ±0.3kHz              | 1200 max.                | 28 ±30% [120Hz]  | 50.0                        | 25.0                      | 23.0                        | 0.44             | 0.20                   | Nickel-Plated Brass    |
| 7SB-20-7    | 7.2 ±0.8kHz              | 350 max.                 | 10 ±30% [1kHz]   | 20.0                        | 14.0                      | 12.8                        | 0.42             | 0.20                   | Stainless              |

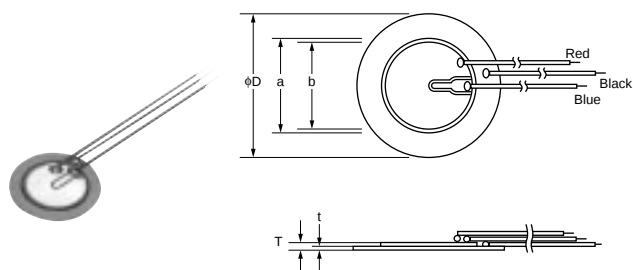

## Self Drive Type

| Part Number | Resonant Frequency (kHz) | Resonant Impedance (ohm) | Capacitance (nF) | Plate Size dia D (mm) (dia) | Element Size a (mm) (dia) | Electrode Size b (mm) (dia) | Thickness T (mm) | Plate Thickness t (mm) | Plate Material         |
|-------------|--------------------------|--------------------------|------------------|-----------------------------|---------------------------|-----------------------------|------------------|------------------------|------------------------|
| 7BB-20-6C   | 6.3 ±0.6kHz              | 500 max.                 | 8.5 ±30% [1kHz]  | 20.0                        | 14.0                      | 12.8                        | 0.42             | 0.20                   | Brass                  |
| 7BB-20-6CA0 | 6.3 ±0.6kHz              | 800 max.                 | 8.5 ±30% [1kHz]  | 20.0                        | 14.0                      | 12.8                        | 0.42             | 0.20                   | Brass (with Lead Wire) |
| 7BB-27-3C   | 3.0 ±0.5kHz              | 300 max.                 | 35 ±30% [1kHz]   | 27.0                        | 19.7                      | 18.2                        | 0.27             | 0.15                   | Brass                  |
| 7BB-27-4C   | 4.6 ±0.5kHz              | 200 max.                 | 18 ±30% [1kHz]   | 27.0                        | 19.7                      | 18.2                        | 0.54             | 0.30                   | Brass                  |
| 7BB-27-4CA0 | 4.6 ±0.5kHz              | 350 max.                 | 18 ±30% [1kHz]   | 27.0                        | 19.7                      | 18.2                        | 0.54             | 0.30                   | Brass (with Lead Wire) |
| 7BB-35-3C   | 2.8 ±0.5kHz              | 200 max.                 | 26 ±30% [1kHz]   | 35.0                        | 25.0                      | 23.0                        | 0.53             | 0.30                   | Brass                  |
| 7BB-35-3CA0 | 2.8 ±0.5kHz              | 200 max.                 | 26 ±30% [1kHz]   | 35.0                        | 25.0                      | 23.0                        | 0.53             | 0.30                   | Brass (with Lead Wire) |
| 7BB-41-2C   | 2.2 ±0.3kHz              | 250 max.                 | 24 ±30% [1kHz]   | 41.0                        | 25.0                      | 23.0                        | 0.63             | 0.40                   | Brass                  |
| 7BB-41-2CA0 | 2.2 ±0.3kHz              | 350 max.                 | 24 ±30% [1kHz]   | 41.0                        | 25.0                      | 23.0                        | 0.63             | 0.40                   | Brass (with Lead Wire) |
| 7NB-27-2C   | 2.2 ±0.5kHz              | 300 max.                 | 37 ±30% [120Hz]  | 27.0                        | 19.7                      | 18.2                        | 0.22             | 0.10                   | Iron Nickel Alloy      |
| 7NB-27-3C   | 3.0 ±0.5kHz              | 300 max.                 | 24 ±30% [1kHz]   | 27.0                        | 19.7                      | 18.2                        | 0.32             | 0.15                   | Iron Nickel Alloy      |
| 7NB-27-4C   | 3.8 ±0.5kHz              | 300 max.                 | 19 ±30% [1kHz]   | 27.0                        | 19.7                      | 18.2                        | 0.42             | 0.20                   | Iron Nickel Alloy      |
| 7SB-34R7-3C | 3.1 ±0.3kHz              | 150 max.                 | 24 ±30% [1kHz]   | 34.7                        | 25.0                      | 23.4                        | 0.50             | 0.25                   | Stainless              |

## Node Diameter

| Part Number | Node Diameter (mm) |
|-------------|--------------------|
| 7BB-20-6C   | φ13.5              |
| 7BB-27-4C   | φ17.5              |
| 7BB-35-3C   | φ22.5              |
| 7BB-41-2C   | φ26.5              |

• Sound diaphragm without feedback electrode also have the same node diameters.


## Piezoelectric Diaphragms Notice

### ■ Notice (Soldering and Mounting)

1. Applying load on the center area of the diaphragm may cause clack in the ceramic element. When the diaphragm is supported by edge, the load should be only applied around edge.
2. Please consult with Murata or Murata representative, in case of soldering on the component.

### ■ Notice (Handling)

1. Please do not touch the component with bare hand because electrode may be corroded.
2. The component may be damaged if mechanical stress over this specification is applied.
3. Please pay attention to protect operating circuit from surge voltage provided by something of force such as falling, shock and temperature changing.
4. If DC voltage is applied to the component, silver migration may occur. Please pay full attention not to subject the component to DC voltage for long periods.
5. The resistor should be used as shown in Fig. A.  
A suitable resistance value should be chosen, preferably  $1k\Omega$  to  $2k\Omega$ . Instead of this measure, a diode may also be applied as shown in Fig. B.

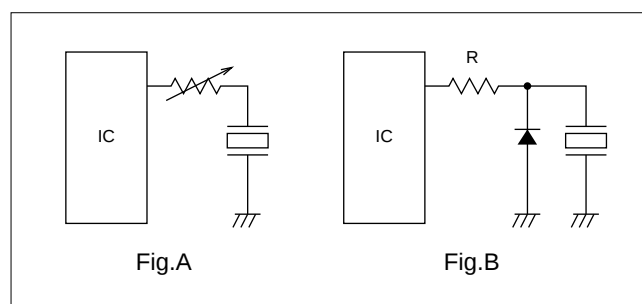

6. Please pay enough attention not to pull lead wire too much because wire may be broken or soldering point may come off.

# Piezoelectric Sound Components

**muRata**

## Piezoelectric Sounders External Drive Pin Type

Now, microcomputers are widely used for microwave ovens, air conditioners, cars, toys, timers, and other alarm equipment. Externally driven piezoelectric sounders are used in digital watches, electronic calculators, telephones and other equipment. They are driven by a signal (ex, 2048Hz or 4096Hz) from an LSI and provide melodious sound.


### ■ Features

1. Low power consumption.
2. No contacts therefore, no noise and highly reliable.


### ■ Applications

- Telephone ringers.
- Various office equipment such as PPCs, printers and keyboards.
- Various home appliances such as microwave ovens.
- Confirmation sound of various audio equipment.


PKM13EPY-4002-B0

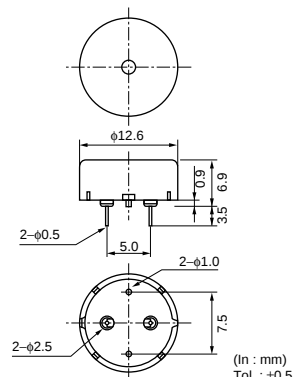


PKM17EPP-2002-B0

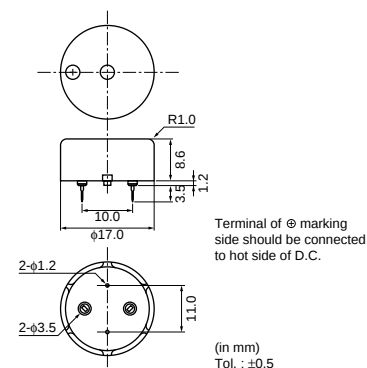


PKM17EPP-4001-B0

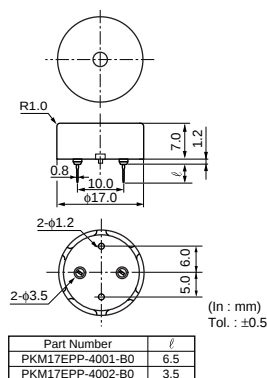


PKM17EPT-4001-B0

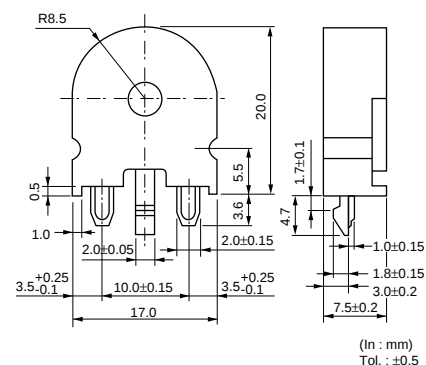

PKM22EP-2001

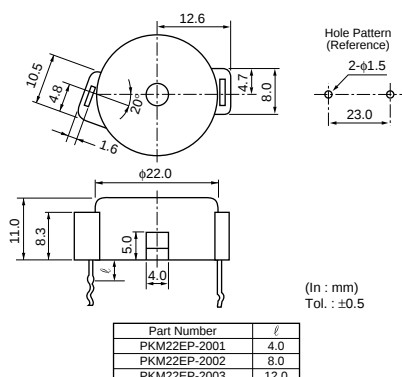

PKM22EPP-2001-B0

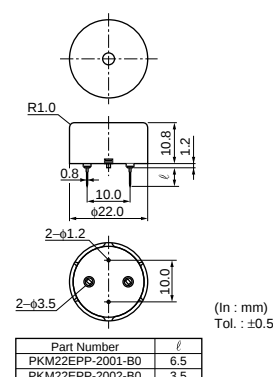


Continued on the following page.

Continued from the preceding page.


2




PKM22EPP-4001-B0

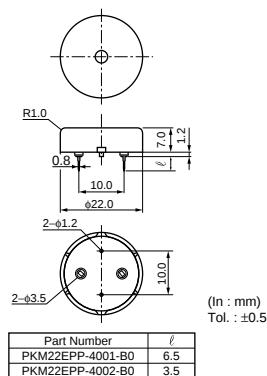


PKM22EPP-4005-B0

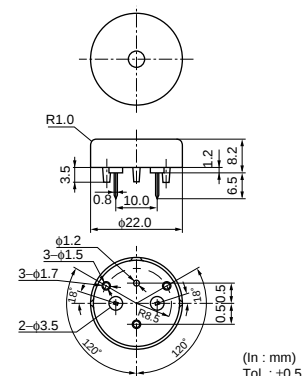


PKM22EPP-4007-B0

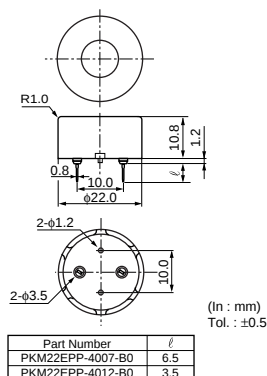

PKM22EPT-2001-B0

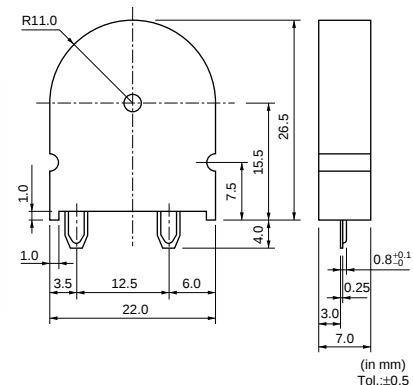

PKM22EPT-4001-B0

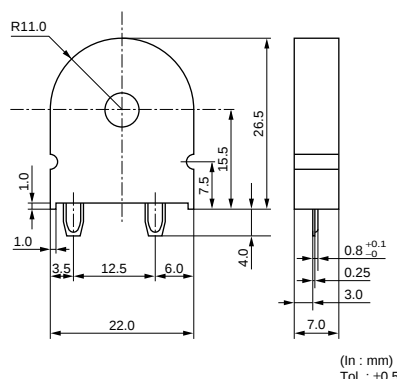







| Part Number      | Sound Pressure Level (dB)                | Sound Pressure Level(Ref. only) (dB)   | Operating Voltage Range (Vp-p)  | Capacitance (nF)         | Operating Temp. Range | Storage Temp. Range |
|------------------|------------------------------------------|----------------------------------------|---------------------------------|--------------------------|-----------------------|---------------------|
| PKM13EPY-4002-B0 | 70 min.<br>[3Vp-p,4kHz,square wave,10cm] | 70 min.<br>[1Vrms,4kHz,sine wave,10cm] | 25 max.                         | 5.5 $\pm 30\%$<br>[1kHz] | -20 to +70°C          | -30 to +80°C        |
| PKM17EPP-2002-B0 | 70 min.<br>[3Vo-p,2kHz,square wave,10cm] | 70 min.<br>[1Vrms,2kHz,sine wave,10cm] | 25 Vo-p max.<br>[with polarity] | 34 $\pm 30\%$<br>[120Hz] | -20 to +70°C          | -30 to +80°C        |
| PKM17EPP-4001-B0 | 72 min.<br>[3Vp-p,4kHz,square wave,10cm] | 72 min.<br>[1Vrms,4kHz,sine wave,10cm] | 25 max.                         | 7 $\pm 30\%$<br>[1kHz]   | -20 to +70°C          | -30 to +80°C        |
| PKM17EPT-4001-B0 | 75 min.<br>[3Vp-p,4kHz,square wave,10cm] | 75 min.<br>[1Vrms,4kHz,sine wave,10cm] | 25 max.                         | 9.5 $\pm 30\%$<br>[1kHz] | -20 to +70°C          | -30 to +80°C        |
| PKM22EP-2001     | 75 min.<br>[3Vp-p,2kHz,square wave,10cm] | 75 min.<br>[1Vrms,2kHz,sine wave,10cm] | 25 max.                         | 17 $\pm 30\%$<br>[120Hz] | -20 to +70°C          | -30 to +80°C        |
| PKM22EPP-2001-B0 | 70 min.<br>[3Vp-p,2kHz,square wave,10cm] | 70 min.<br>[1Vrms,2kHz,sine wave,10cm] | 25 max.                         | 19 $\pm 30\%$<br>[120Hz] | -20 to +70°C          | -30 to +80°C        |
| PKM22EPP-4001-B0 | 75 min.<br>[3Vp-p,4kHz,square wave,10cm] | 75 min.<br>[1Vrms,4kHz,sine wave,10cm] | 25 max.                         | 12 $\pm 30\%$<br>[1kHz]  | -20 to +70°C          | -30 to +80°C        |
| PKM22EPP-4005-B0 | 75 min.<br>[3Vp-p,4kHz,square wave,10cm] | 75 min.<br>[1Vrms,4kHz,sine wave,10cm] | 25 max.                         | 12 $\pm 30\%$<br>[1kHz]  | -20 to +70°C          | -30 to +80°C        |
| PKM22EPP-4007-B0 | 85 min.<br>[3Vp-p,4kHz,square wave,10cm] | 85 min.<br>[1Vrms,4kHz,sine wave,10cm] | 25 max.                         | 12 $\pm 30\%$<br>[1kHz]  | -20 to +70°C          | -30 to +80°C        |

Continued on the following page.

Continued from the preceding page.

| Part Number      | Sound Pressure Level (dB)                | Sound Pressure Level(Ref. only) (dB)   | Operating Voltage Range (Vp-p) | Capacitance (nF)   | Operating Temp. Range | Storage Temp. Range |
|------------------|------------------------------------------|----------------------------------------|--------------------------------|--------------------|-----------------------|---------------------|
| PKM22EPT-2001-B0 | 70 min.<br>[3Vp-p,2kHz,square wave,10cm] | 70 min.<br>[1Vrms,2kHz,sine wave,10cm] | 25 max.                        | 19 ±30%<br>[120Hz] | -20 to +70°C          | -30 to +80°C        |
| PKM22EPT-4001-B0 | 85 min.<br>[3Vp-p,4kHz,square wave,10cm] | 85 min.<br>[1Vrms,4kHz,sine wave,10cm] | 25 max.                        | 10 ±30%<br>[1kHz]  | -20 to +70°C          | -30 to +80°C        |

## ■ Freq. Response (Square Wave 3Vp-p, 10cm)

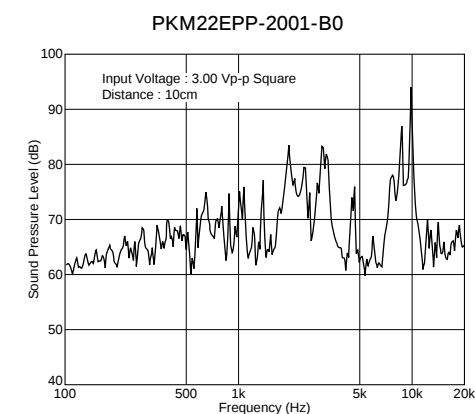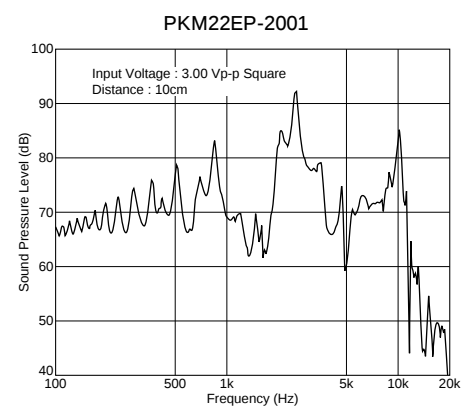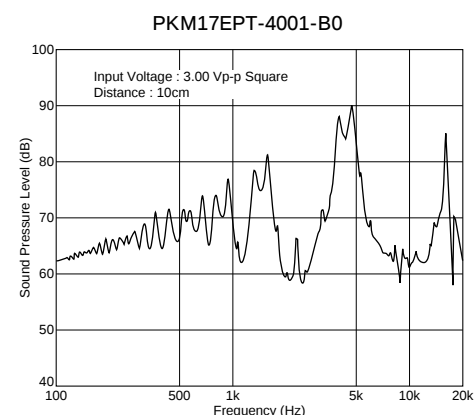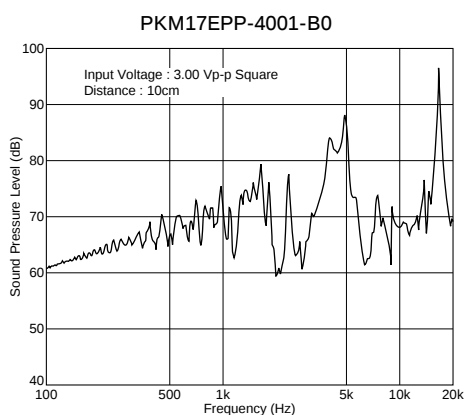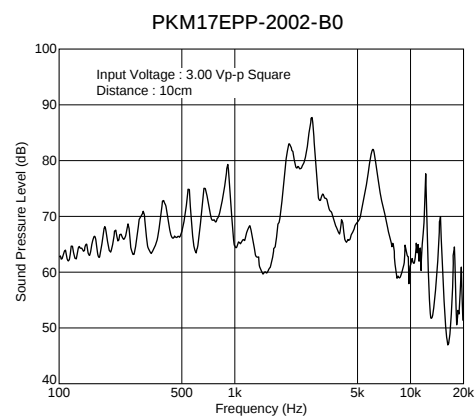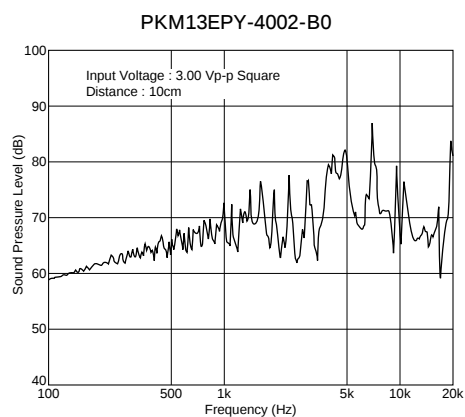


Continued on the following page.


Continued from the preceding page.

## ■ Freq. Response (Square Wave 3Vp-p, 10cm)


PKM22EPP-4001-B0

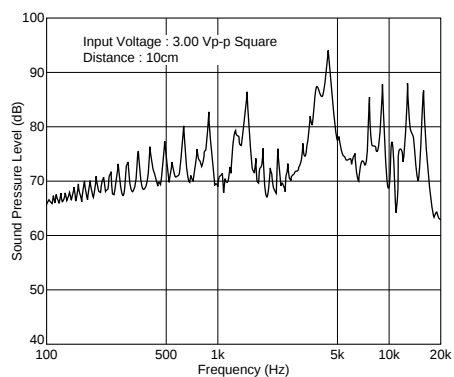


PKM22EPP-4005-B0

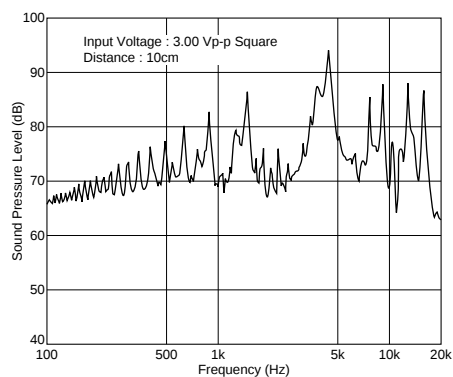


PKM22EPP-4007-B0

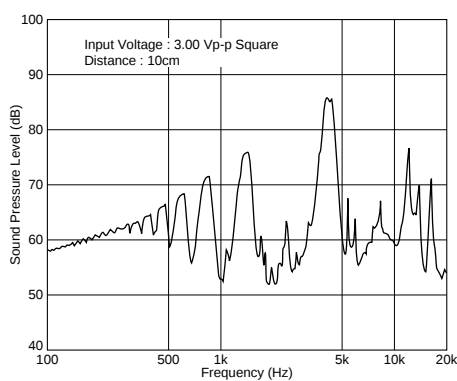

PKM22EPT-2001-B0

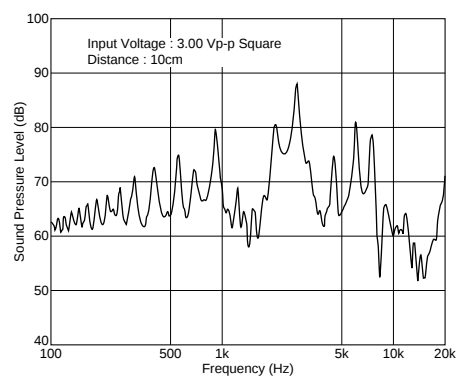


PKM22EPT-4001-B0

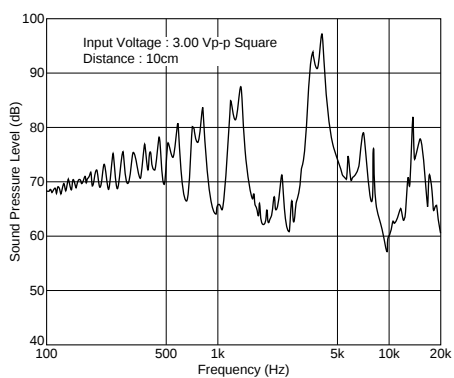


## ■ Freq. Response (Sine Wave 1Vrms, 10cm)

PKM13EPY-4002-B0

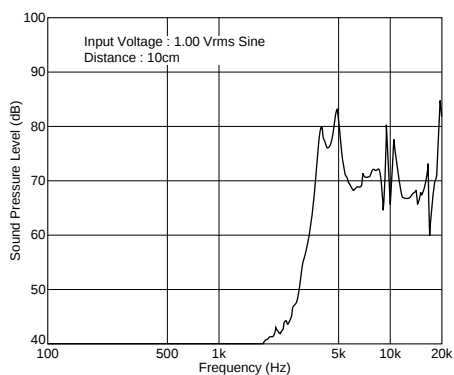

PKM17EPP-2002-B0

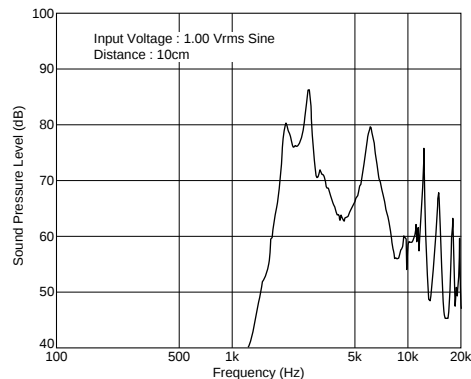


Continued on the following page.


Continued from the preceding page.

## ■ Freq. Response (Sine Wave 1Vrms, 10cm)


PKM17EPP-4001-B0

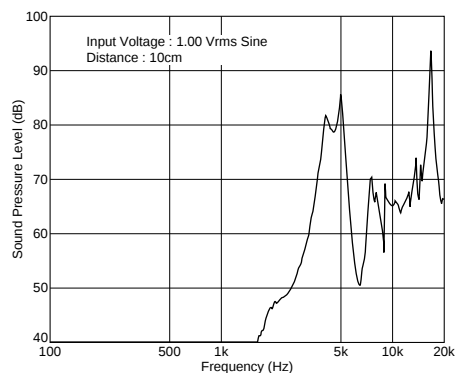


PKM17EPT-4001-B0

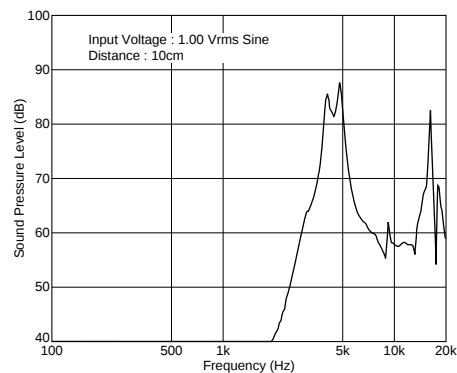


PKM22EP-2001

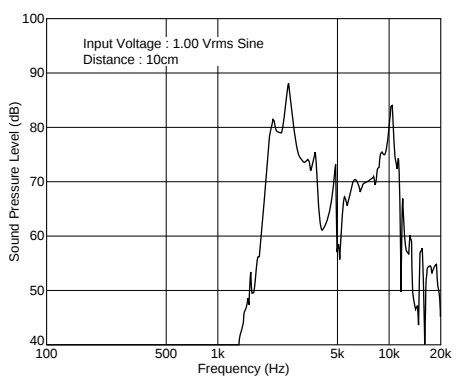


PKM22EPP-2001-B0

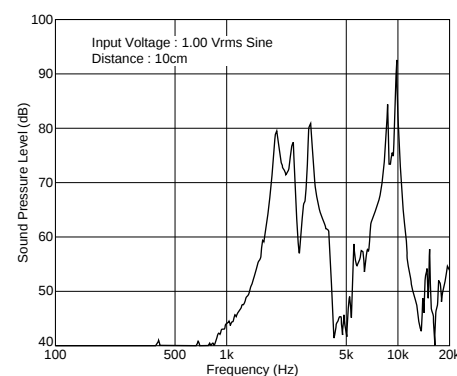


PKM22EPP-4001-B0

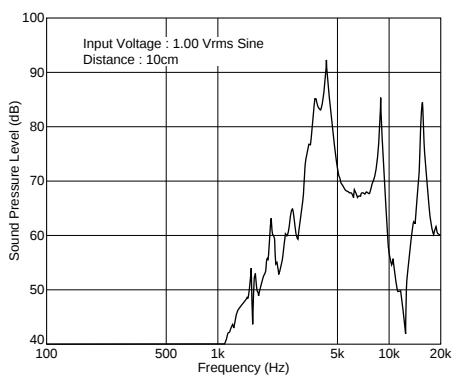


PKM22EPP-4005-B0

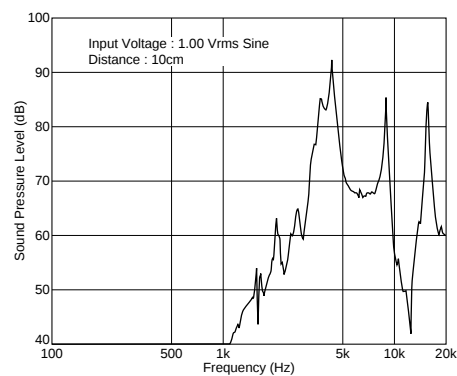

PKM22EPP-4007-B0

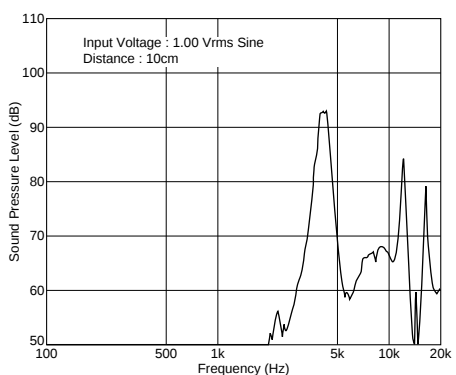


PKM22EPT-2001-B0

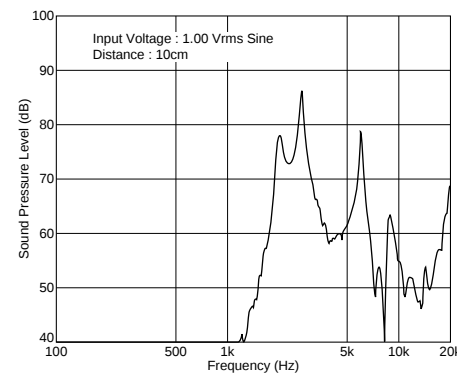

Continued on the following page.

Continued from the preceding page.

## ■ Freq. Response (Sine Wave 1Vrms, 10cm)

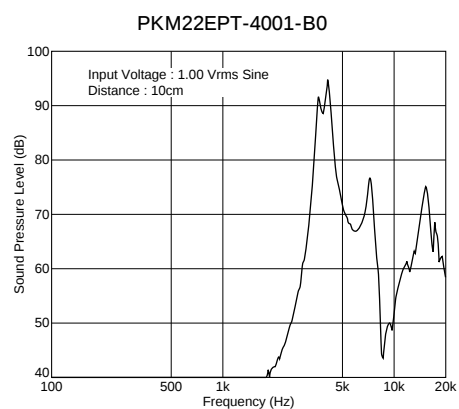

Piezoelectric Sound Components




Piezoelectric Sounders External Drive Pin Type Taping

Taking advantage of extensive automatic insertion designing technology and materials experience, Murata has developed standard taping type piezoelectric sounder.

This Murata technology supports labor and cost saving activities.


■ Features

- 1. High and stable mountability.
- 2. Ammo packaging.
- 3. Minimum quantity (order in sets only) : 500pcs.

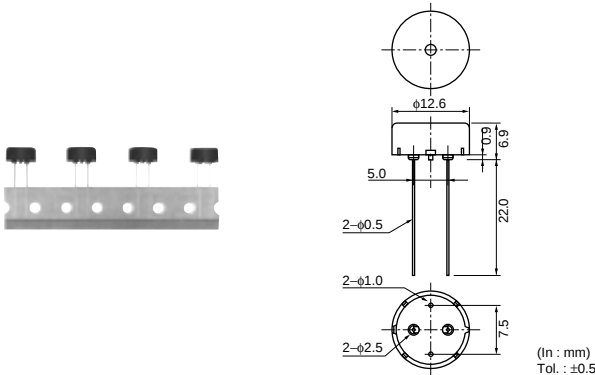


| Part Number      | Sound Pressure Level (dB)                | Sound Pressure Level(Ref. only) (dB)   | Operating Voltage Range (Vp-p) | Capacitance (nF)   | Operating Temp. Range | Storage Temp. Range |
|------------------|------------------------------------------|----------------------------------------|--------------------------------|--------------------|-----------------------|---------------------|
| PKM13EPY-4000-A0 | 70 min.<br>[3Vp-p,4kHz,square wave,10cm] | 70 min.<br>[1Vrms,4kHz,sine wave,10cm] | 25 max.                        | 5.5 ±30%<br>[1kHz] | -20 to +70°C          | -30 to +80°C        |

■ Freq. Response (Square Wave 3Vp-p, 10cm)

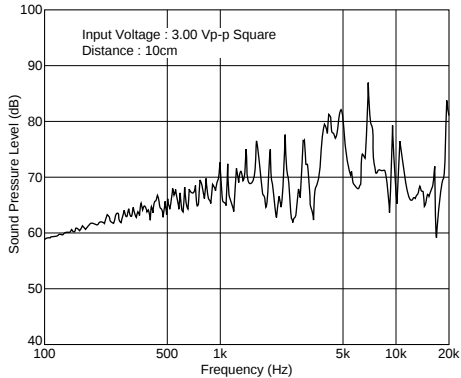


■ Freq. Response (Sine Wave 1Vrms, 10cm)

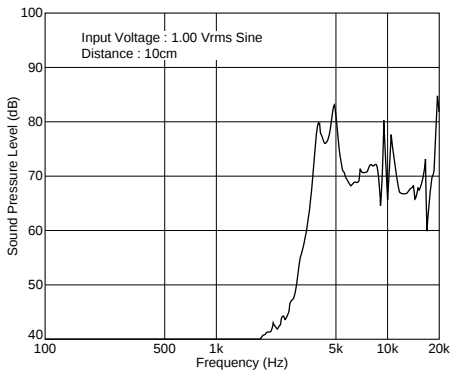

Continued on the following page. 

 Continued from the preceding page.

## ■ Taping Dimension

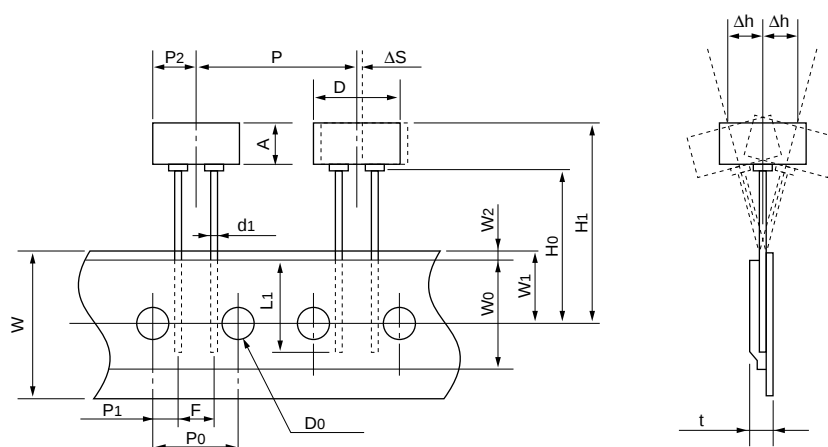

| Item                                                          | Code | Nominal value | Tol. | Remarks                                          |
|---------------------------------------------------------------|------|---------------|------|--------------------------------------------------|
| Width of Diameter                                             | D    | ø12.6         | ±0.5 |                                                  |
| Height of Component                                           | A    | 6.9           | ±0.5 |                                                  |
| Dimensions of Terminal                                        | d1   | ø0.5          | ±0.1 |                                                  |
| Lead length under The Hold down Tape                          | L1   | 8.0 min.      | —    |                                                  |
| Pitch of Component                                            | P    | 25.4          | ±0.5 |                                                  |
| Pitch of Sprocket                                             | P0   | 12.7          | ±0.2 | Tolerance for Pitches 10XP0=127±2mm              |
| Length from Hole Center to Lead                               | P1   | 3.85          | ±0.7 |                                                  |
| Length from Hole Center to Component Center                   | P2   | 6.35          | ±0.7 |                                                  |
| Lead Spacing                                                  | F    | 5.0           | ±0.5 |                                                  |
| Slant to The Forward or Backward                              | Δh   | 0             | ±1.0 | 360° : 1mm max.                                  |
| Width of Carrier Tape                                         | W    | 18.0          | ±0.5 |                                                  |
| Width of Hold down Tape                                       | W0   | 12.5 min.     | —    | Hold down tape does not exceed the carrier tape. |
| Position of Sprocket Hole                                     | W1   | 9.0           | ±0.5 |                                                  |
| Gap of Hold Down Tape and Carrier Tape                        | W2   | 2.0 max.      | —    |                                                  |
| Distance Between The Center of Sprocket Hole and Lead Stopper | H0   | 18.0          | ±0.5 |                                                  |
| Total Height of Component                                     | H1   | 26.0 max.     | —    |                                                  |
| Diameter of Sprocket Hole                                     | D0   | ø4.0          | ±0.2 |                                                  |
| Total Thickness of Tape                                       | t    | 0.6           | ±0.2 |                                                  |
| Body Tilt                                                     | ΔS   | 0             | ±1.0 |                                                  |

(in mm)

# Piezoelectric Sound Components



## Piezoelectric Sounders External Drive Lead Wire Type



Now, microcomputers are widely used for microwave ovens, air conditioners, cars, toys, timers, and other alarm equipment. Externally driven piezoelectric sounders are used in digital watches, electronic calculators, telephones and other equipment. They are driven by a signal (ex, 2048Hz or 4096Hz) from an LSI and provide melodious sound.

### ■ Features

1. Low power consumption.
2. No contacts therefore, no noise and highly reliable.



### ■ Applications

- Telephone ringers.
- Various office equipment such as PPCs, printers and keyboards.
- Various home appliances such as microwave ovens.
- Confirmation sound of various audio equipment.

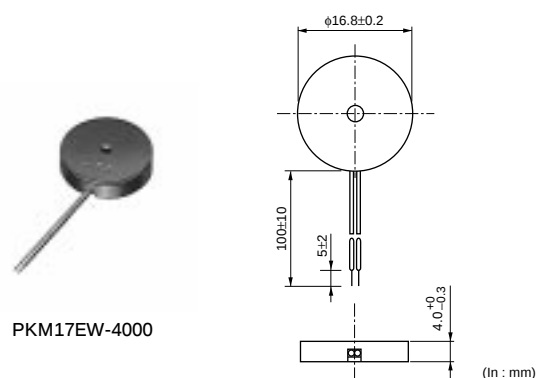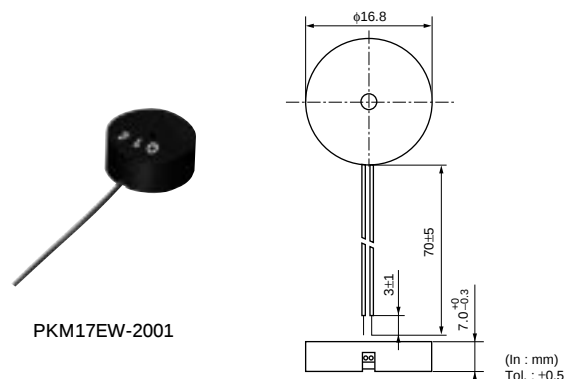

| Part Number         | Sound Pressure Level (dB)                | Sound Pressure Level(Ref. only) (dB)   | Operating Voltage Range (Vp-p) | Capacitance (nF)   | Operating Temp. Range | Storage Temp. Range |
|---------------------|------------------------------------------|----------------------------------------|--------------------------------|--------------------|-----------------------|---------------------|
| <b>PKM17EW-2001</b> | 72 min.<br>[3Vp-p,2kHz,square wave,10cm] | 70 min.<br>[1Vrms,2kHz,sine wave,10cm] | 7 max.                         | 40 ±30%<br>[120Hz] | -20 to +70°C          | -30 to +80°C        |
| <b>PKM17EW-4000</b> | 75 min.<br>[3Vp-p,4kHz,square wave,10cm] | 70 min.<br>[1Vrms,4kHz,sine wave,10cm] | 25 max.                        | 9.5 ±30%<br>[1kHz] | -20 to +70°C          | -30 to +80°C        |



### ■ Freq. Response (Square Wave 3Vp-p, 10cm)

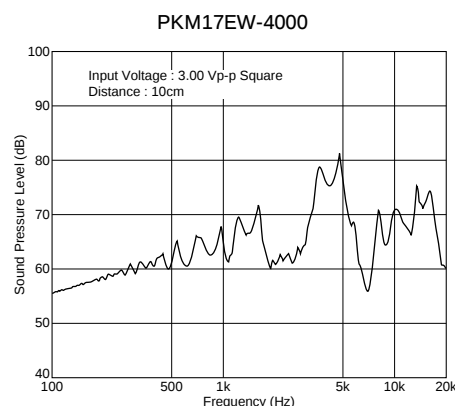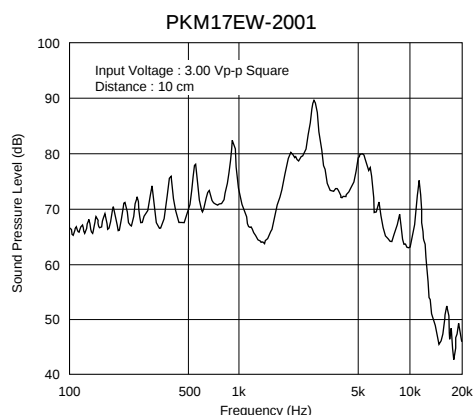

Continued on the following page.

 Continued from the preceding page.

■ Freq. Response (Sine Wave 1Vrms, 10cm)

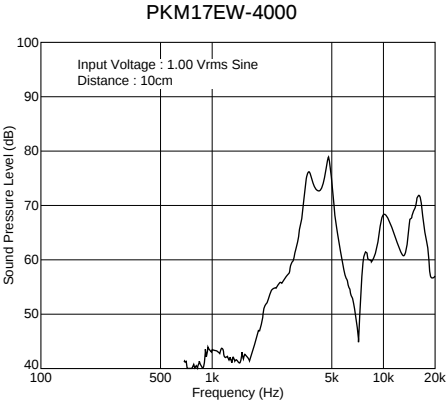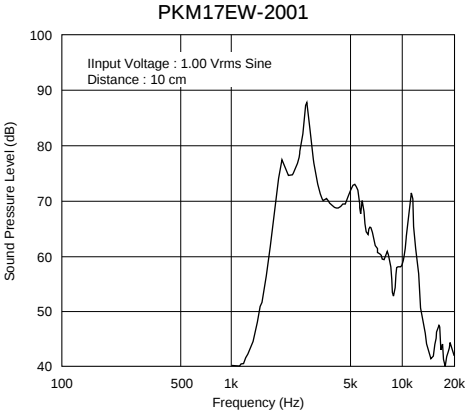

Piezoelectric Sound Components



Piezoelectric Sounders External Drive SMD Type


Taking advantage of extensive acoustic and mechanical designing technology and high performance ceramics, Murata has developed SMD piezoelectric sounder that suites thin, high-density design of electronic equipment.

- Features
1. High S.P.L. and clear sound.

2. Reflowable.


3. Tape & Reel supply.

4. Minimum quantity (order in sets only):1,000 pcs.

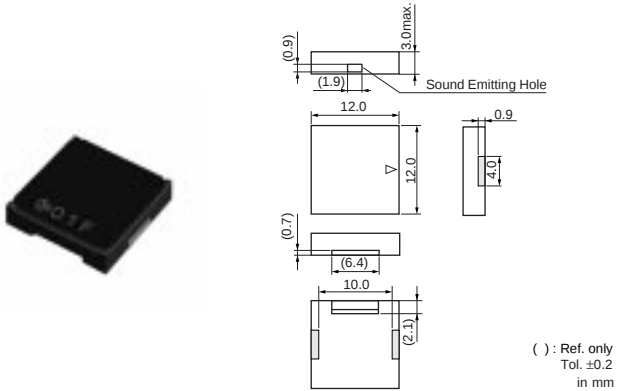


| Part Number       | Sound Pressure Level (dB)                | Operating Voltage Range (Vp-p) | Operating Temp. Range | Storage Temp. Range |
|-------------------|------------------------------------------|--------------------------------|-----------------------|---------------------|
| PKLCS1212E4001-R1 | 75 min.<br>[3Vp-p,4kHz,square wave,10cm] | 25 max.                        | -20 to +70°C          | -30 to +80°C        |

■ Standard Land Pattern Dimensions



(in mm)

■ Freq. Response (Square Wave 3Vp-p, 10cm)

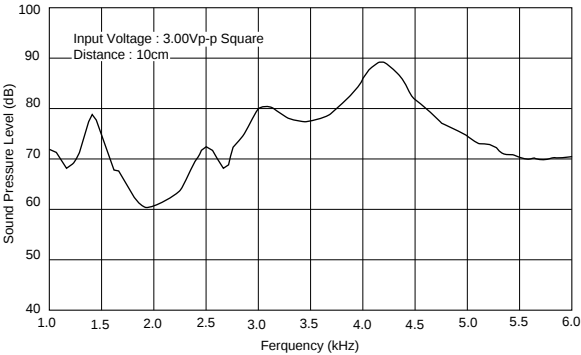

Continued on the following page. 

## ■ Taping Dimension



## Piezoelectric Sounders (External Drive) Circuit/Notice


### ■ Circuit

The following are examples of externally driven circuits.


(1) Unstable multi-vibrator using Tr.

(2) Circuits using inverters or NAND gates.

(1)



(2)




### ■ Notice (Soldering and Mounting)

Washing of the component is not acceptable, because it is not sealed.

### ■ Notice (Handling)

1. The component may be damaged if mechanical stress over this specification is applied.
2. Please pay attention to protect operating circuit from surge voltage provided by something of force such as falling, shock and temperature changing.
3. If DC voltage is applied to the component, silver migration may occur. Please pay full attention not to subject the component to DC voltage for long periods.
4. The resistor should be used as shown in Fig. A. A suitable resistance value should be chosen, preferably 1kΩ to 2kΩ. Instead of this measure, a diode may also be applied as shown in Fig. B.

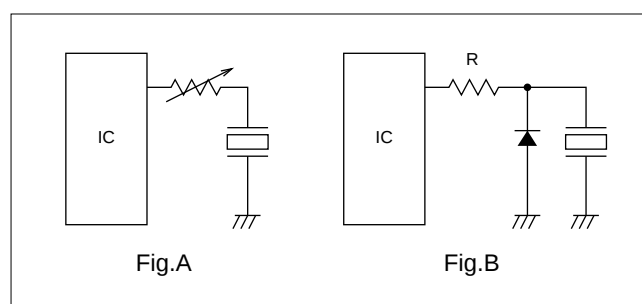

5. Please pay enough attention not to pull lead wire too much because wire may be broken or soldering point may come off.

# Piezoelectric Sound Components



## Piezoelectric Ringers (PIEZORINGER®)


As the result of rapid development of ICs in telephones, demand for piezoelectric sounder as telephone ringers has also rapidly increased. To effectively satisfy this rising demand, Murata provides a suitable piezoelectric sounder called "PIEZORINGER", with the following features.

### ■ Features

1. Extremely clear sound.
2. Since it is voltage driven, the power consumption is quite negligible.
3. It can be driven directly from ICs.
4. Extremely thin and light.




PKM33EP-1201C




| Part Number   | l   |
|---------------|-----|
| PKM33EP-1201C | 5.0 |
| PKM33EP-1202C | 0   |




PKM34EW-1101C/1201C

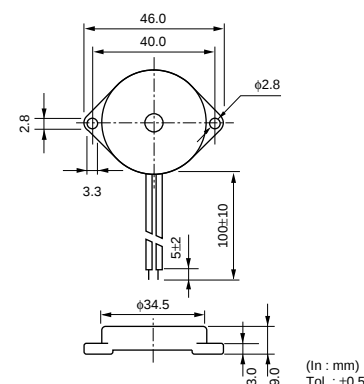

PKM44EP-0901



PKM44EW-1001C

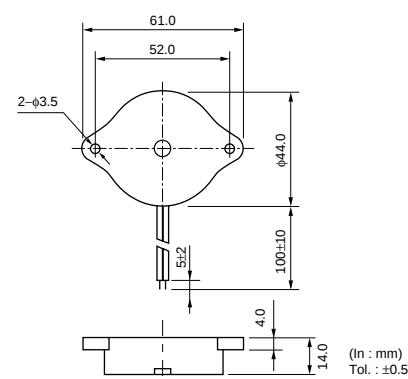





Pin Type

| Part Number   | Sound Pressure Level (dB)                 | Sound Pressure Level(Ref. only) (dB)     | Operating Voltage Range (Vp-p) | Capacitance (nF)   | Operating Temp. Range | Storage Temp. Range |
|---------------|-------------------------------------------|------------------------------------------|--------------------------------|--------------------|-----------------------|---------------------|
| PKM33EP-1201C | 68 min.<br>[30Vp-p,1.2kHz,square wave,1m] | 65 min.<br>[1Vrms,1.2kHz,sine wave,10cm] | 40 max.                        | 40 ±30%<br>[120Hz] | -20 to +70°C          | -30 to +80°C        |
| PKM44EP-0901  | 70 min.<br>[30Vp-p,1kHz,square wave,1m]   | 60 min.<br>[1Vrms,1kHz,sine wave,10cm]   | 40 max.                        | 68 ±30%<br>[120Hz] | -20 to +70°C          | -30 to +80°C        |

Lead Wire Type

| Part Number   | Sound Pressure Level (dB)                 | Sound Pressure Level(Ref. only) (dB)     | Operating Voltage Range (Vp-p) | Capacitance (nF)   | Operating Temp. Range | Storage Temp. Range |
|---------------|-------------------------------------------|------------------------------------------|--------------------------------|--------------------|-----------------------|---------------------|
| PKM34EW-1101C | 70 min.<br>[30Vp-p,1.1kHz,square wave,1m] | 60 min.<br>[1Vrms,1.1kHz,sine wave,10cm] | 40 max.                        | 40 ±30%<br>[120Hz] | -20 to +70°C          | -30 to +80°C        |
| PKM34EW-1201C | 70 min.<br>[30Vp-p,1.2kHz,square wave,1m] | 60 min.<br>[1Vrms,1.2kHz,sine wave,10cm] | 60 max.                        | 32 ±30%<br>[120Hz] | -20 to +70°C          | -30 to +80°C        |
| PKM44EW-1001C | 75 min.<br>[30Vp-p,1kHz,square wave,1m]   | 70 min.<br>[1Vrms,1kHz,sine wave,10cm]   | 30 max.                        | 68 ±30%<br>[120Hz] | -20 to +70°C          | -30 to +80°C        |


■ Freq. Response (Square Wave 30Vp-p, 1m)

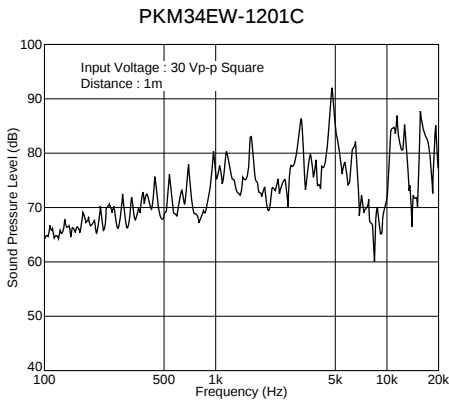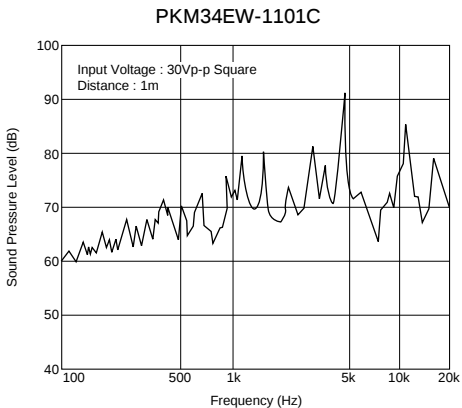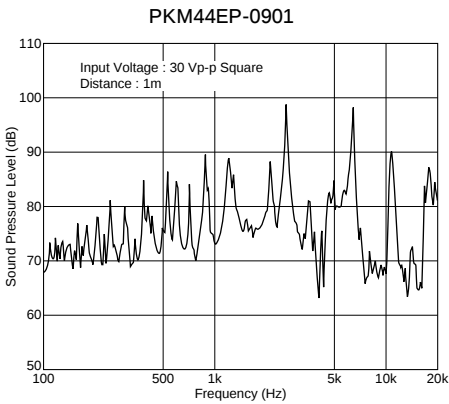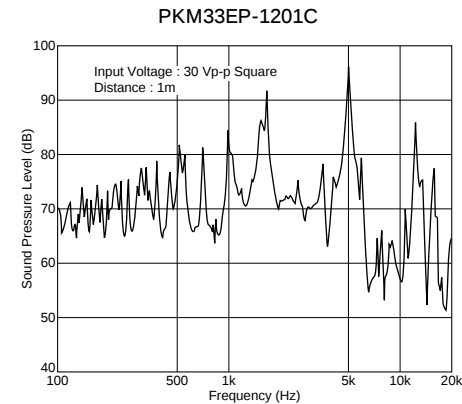






Continued on the following page. ↗

Continued from the preceding page.

## ■ Freq. Response (Square Wave 30Vp-p, 1m)

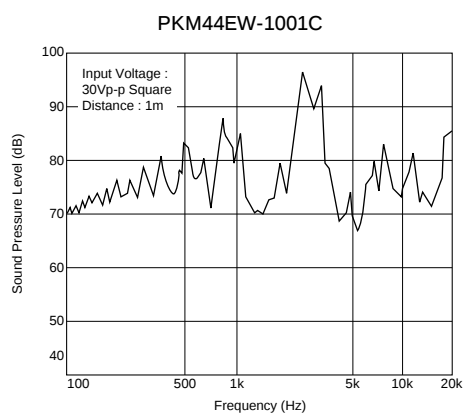

## ■ Freq. Response (Sine Wave 1Vrms, 10cm)

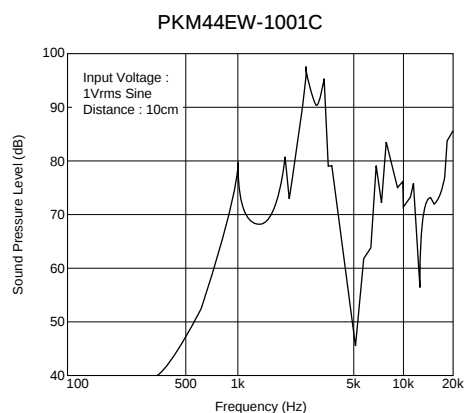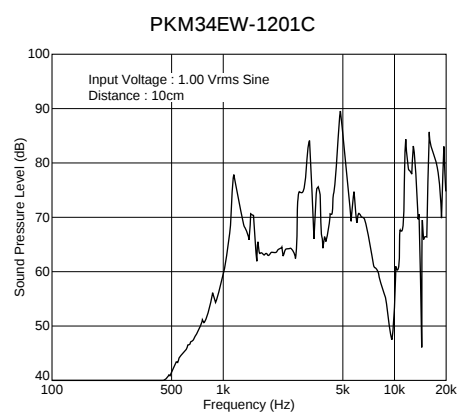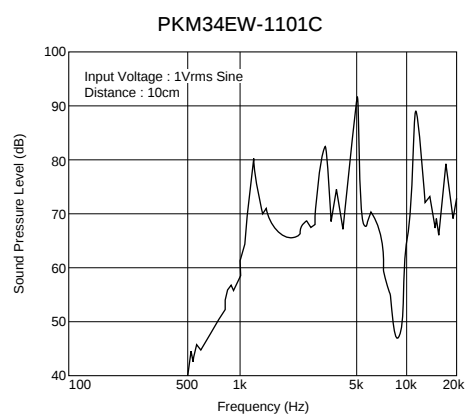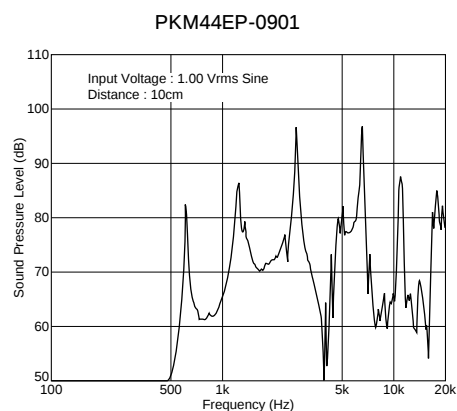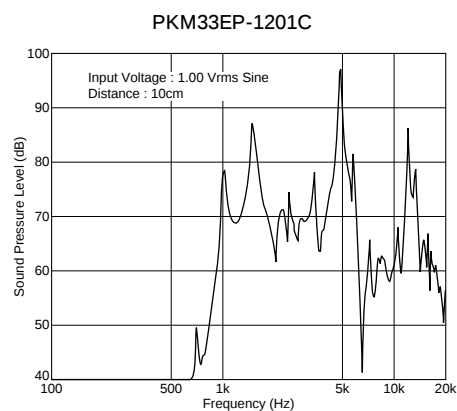


## Piezoelectric Ringers (PIEZORINGER®) Notice

### ■ Notice (Soldering and Mounting)

Washing of the component is not acceptable, because it is not sealed.

### ■ Notice (Handling)

1. The component may be damaged if mechanical stress over this specification is applied.
2. Please pay attention to protect operating circuit from surge voltage provided by something of force such as falling, shock and temperature changing.
3. If DC voltage is applied to the component, silver migration may occur. Please pay full attention not to subject the component to DC voltage for long periods.
4. The resistor should be used as shown in Fig. A.  
A suitable resistance value should be chosen, preferably  $1k\Omega$  to  $2k\Omega$ . Instead of this measure, a diode may also be applied as shown in Fig. B.

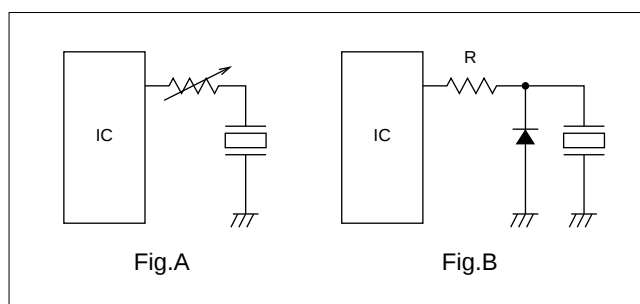

5. Please pay enough attention not to pull lead wire too much because wire may be broken or soldering point may come off.

# Piezoelectric Sound Components





## Piezoelectric Sounders Self Drive Pin Type

Piezoelectric sounder self drive type requires only simple circuit and DC power supply. Since this type uses resonant system, it is also available for alarms which need large sound volume.

### Applications


- Gas alarms, burglar alarms, smoke detectors.
- Air conditioners, Microwave ovens, washing machines and other home-electronic appliance controlled by microcomputer.
- Bicycles, toys, game machines.

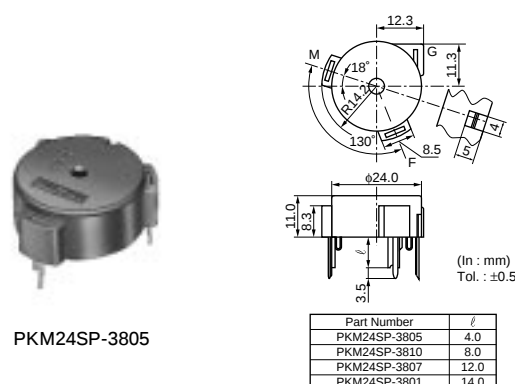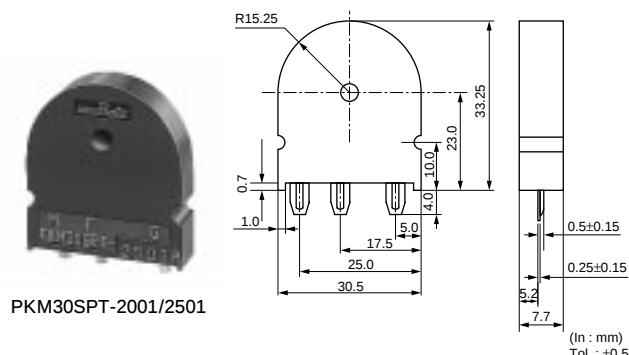


| Part Number      | Sound Pressure Level (dB) | Oscillating Frequency (kHz) | Current Consumption (mA) | Operating Voltage Range (Vdc) | Operating Temp. Range | Storage Temp. Range |
|------------------|---------------------------|-----------------------------|--------------------------|-------------------------------|-----------------------|---------------------|
| PKM24SP-3805     | 90 min.<br>[12Vdc,10cm]   | 3.8 ±0.4kHz<br>[12Vdc]      | 12 max.<br>[12Vdc]       | 3.0 to 20.0                   | -20 to +70°C          | -30 to +80°C        |
| PKM30SPT-2001-B0 | 75 min.<br>[12Vdc,10cm]   | 2.0 ±0.3kHz<br>[12Vdc]      | 20 max.<br>[12Vdc]       | 3.0 to 20.0                   | -20 to +70°C          | -30 to +80°C        |
| PKM30SPT-2501-B0 | 75 min.<br>[12Vdc,10cm]   | 2.5 ±0.3kHz<br>[12Vdc]      | 20 max.<br>[12Vdc]       | 3.0 to 20.0                   | -20 to +70°C          | -30 to +80°C        |

### Standard Circuit Examples

PKM30SPT-2001/2501

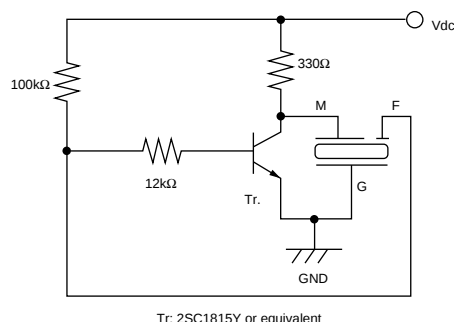

PKM24SP-3805

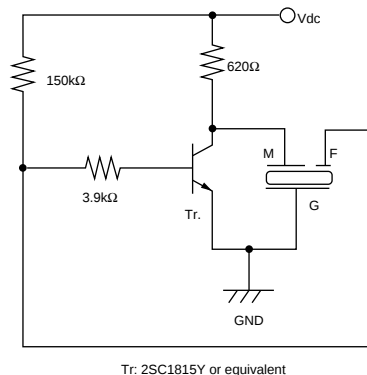

## Piezoelectric Sounders (Self Drive) Notice

### ■ Notice (Soldering and Mounting)

1. Washing of the component is not acceptable, because it is not sealed.
2. Please do not cover the hole with tape or other obstacle as this will produce irregular oscillation.
3. There should not be any obstacle within 15mm from top of the component as this will produce irregular oscillation.

### ■ Notice (Handling)

1. The component may be damaged if mechanical stress over this specification is applied.
2. Please pay attention to protect operating circuit from surge voltage provided by something of force such as falling, shock and temperature changing.
3. If DC voltage is applied to the component, silver migration may occur. Please pay full attention not to subject the component to DC voltage for long periods.
4. The standard self-driven circuits utilizes transistor switching. The circuit constants shown in the table below are optimally chosen to maintain stable oscillation. So please follow it when you design a circuit.

# Piezoelectric Sound Components



## Piezoelectric Buzzers


This is unified piezoelectric sounder which has piezoelectric diaphragm of 3 terminals connected to self drive circuit, and it easily generates sound with only a DC power supply (DC3.0-20V). Using suitably designed resonant system, this type can be used where large sound volumes are needed.

### Applications


- Gas alarms, burglar alarms.
- Air conditioners, microwave ovens and various types of microcomputer controlled home-electronic appliances.
- Automobile speed alarms, navigators, car stereos and other automobile equipment.
- Toys, games, and other simple electronic devices such as teaching aids.




PKB30SPC-2001/3001

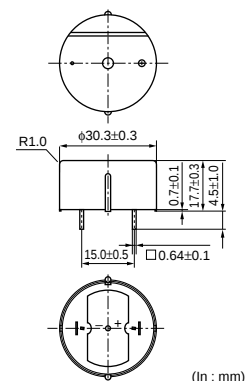

PKB24SPC-3601

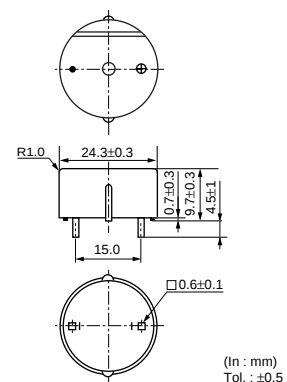

PKB24SW-3301

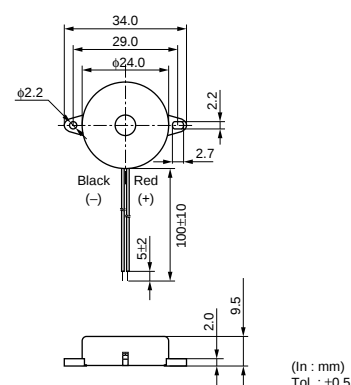

Pin Type


| Part Number      | Sound Pressure Level (dB) | Oscillating Frequency (kHz) | Current Consumption (mA) | Operating Voltage Range (Vdc) | Operating Temp. Range | Storage Temp. Range |
|------------------|---------------------------|-----------------------------|--------------------------|-------------------------------|-----------------------|---------------------|
| PKB30SPC-2001-B0 | 92 min.<br>[12Vdc,10cm]   | 2.0 ±0.4kHz<br>[12Vdc]      | 15 max.<br>[12Vdc]       | 3.0 to 15.0                   | -20 to +70°C          | -30 to +80°C        |
| PKB30SPC-3001-B0 | 92 min.<br>[12Vdc,10cm]   | 2.7 ±0.4kHz<br>[12Vdc]      | 15 max.<br>[12Vdc]       | 3.0 to 15.0                   | -20 to +70°C          | -30 to +80°C        |
| PKB24SPC-3601-B0 | 90 min.<br>[12Vdc,10cm]   | 3.6 ±0.5kHz<br>[12Vdc]      | 16 max.<br>[12Vdc]       | 3.0 to 15.0                   | -20 to +70°C          | -30 to +80°C        |

Lead Wire Type


| Part Number  | Sound Pressure Level (dB) | Oscillating Frequency (kHz) | Current Consumption (mA) | Operating Voltage Range (Vdc) | Operating Temp. Range | Storage Temp. Range |
|--------------|---------------------------|-----------------------------|--------------------------|-------------------------------|-----------------------|---------------------|
| PKB24SW-3301 | 80 min.<br>[12Vdc,10cm]   | 3.3 ±0.5kHz<br>[12Vdc]      | 12 max.<br>[12Vdc]       | 3.0 to 20.0                   | -20 to +70°C          | -30 to +80°C        |

■ Voltage-Sound Pressure Level/Voltage-Consumption Current


PKB30SPC-2001

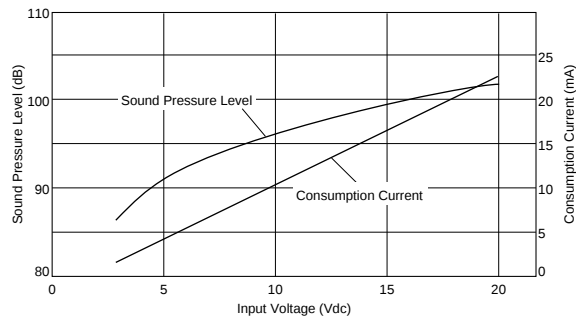


PKB30SPC-3001

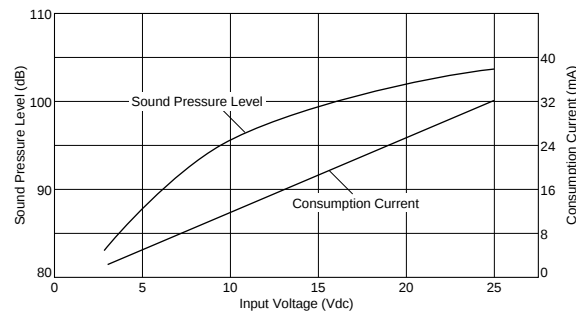

PKB24SPC-3601

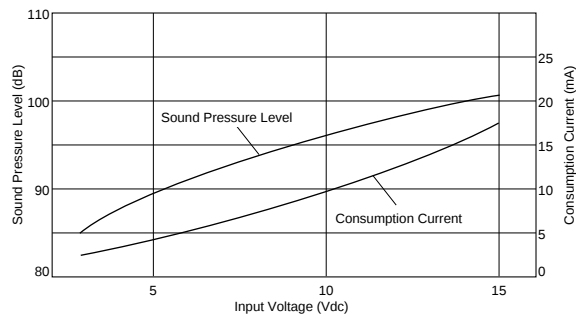

PKB24SW-3301

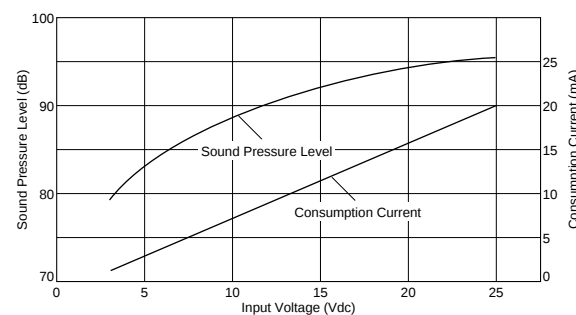


## Piezoelectric Buzzers Notice

### ■ Notice (Soldering and Mounting)

1. Washing of the component is not acceptable, because it is not sealed.
2. Please do not cover the hole with tape or other obstacle as this will produce irregular oscillation.
3. There should not be any obstacle within 15mm from top of the component as this will produce irregular oscillation.

### ■ Notice (Handling)

1. The component may be damaged if mechanical stress over this specification is applied.
2. Resistors should not be connected in series to the power supply as this will produce irregular oscillation. When resistor is necessary to control sound volume, use capacitor ( $1\mu\text{F}$ ) parallel with the buzzer together.

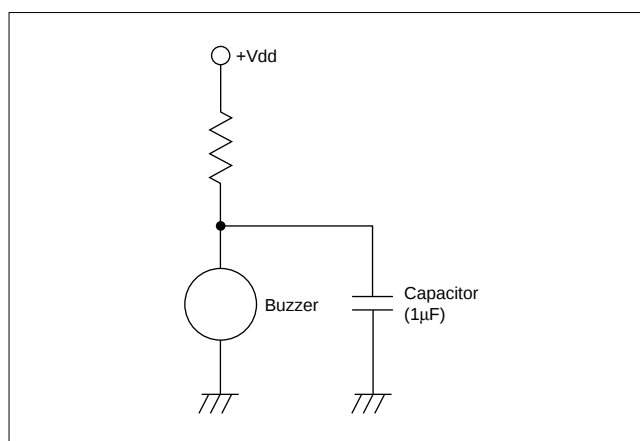

Piezoelectric Sound Components



Piezoelectric Receiver

Taking advantage of extensive acoustic, mechanical designing technology and high performance ceramics, Murata has developed SMD piezoelectric receiver. This Murata technology supports labor and cost saving activities.


- Features
1. Thin shape, light weight.

2. Low current consumption and good matching impedance for a voltage drive.

3. Reflowable.


4. Tape & Reel supply.

5. Minimum quantity (order in sets only):1,500 pcs.

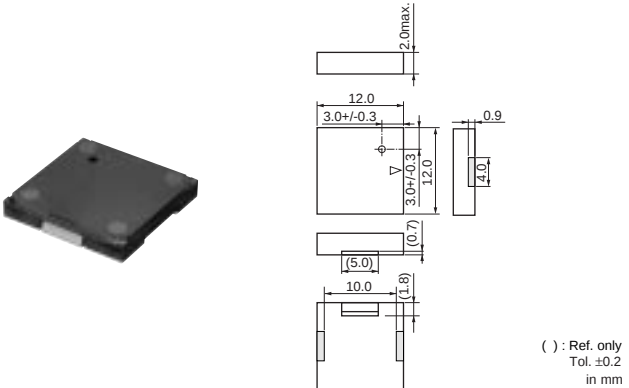


| Part Number       | Sound Pressure Level(1)<br>(dB) | Sound Pressure Level(2)<br>(dB) | Operating Voltage Range<br>(Vp-p) | Operating Temperature Range | Storage Temperature Range |
|-------------------|---------------------------------|---------------------------------|-----------------------------------|-----------------------------|---------------------------|
| PKLCD1212R1000-R1 | 106.0 +4.0/-2.5<br>[at 300Hz]   | 114.0 +2.5/-4.0<br>[at 1kHz]    | 7 max.                            | -20 to +70°C                | -30 to +80°C              |

■ Standard Land Pattern Dimensions



(in mm)


■ Freq. Response (Sine Wave 1Vrms)

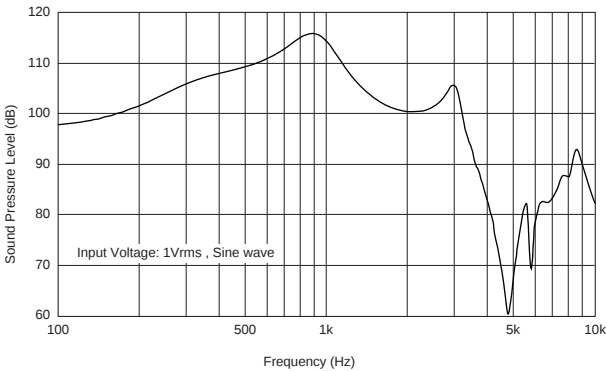

Continued on the following page. 


Continued from the preceding page.

## Taping Dimension

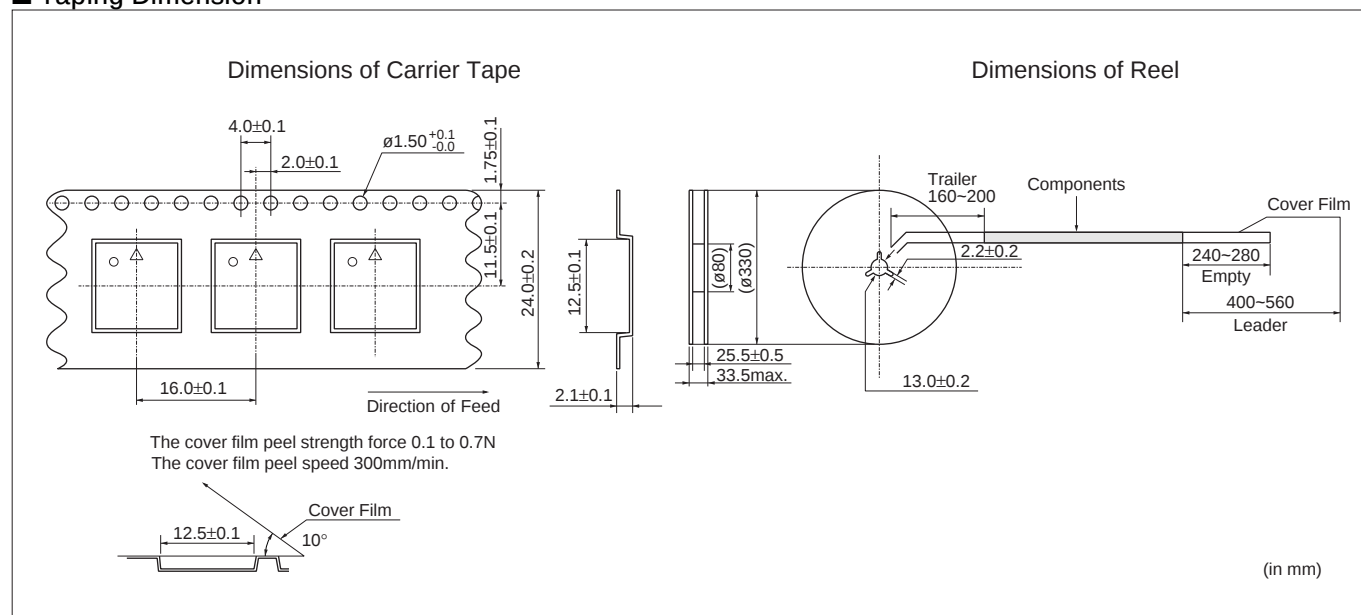

## Piezoelectric Receiver Circuit/Notice

### ■ Circuit

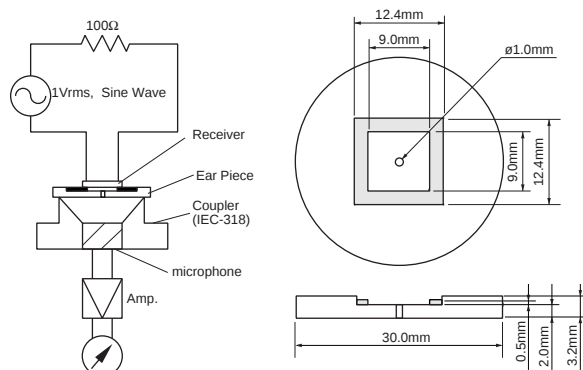

### ■ Notice (Soldering and Mounting)

Washing of the component is not acceptable, because it is not sealed.

### ■ Notice (Handling)

1. The component may be damaged if mechanical stress over this specification is applied.
2. Please pay attention to protect operating circuit from surge voltage provided by something of force such as falling, shock and temperature changing.
3. If DC voltage is applied to the component, silver migration may occur. Please pay full attention not to subject the component to DC voltage for long periods.
4. Please pay attention to the hand set design. Sound pressure level - frequency characteristics are affected by the hand set design. (Blocking the sound emitting hole or air dumping hole may degrade S.P.L. -frequency characteristics. To dispose other components or obstacle close to the holes may also affect the characteristics.)

# Piezoelectric Sound Components




## Piezoelectric Speakers (CERAMITONE®)


As voice synthesizing techniques with ICs and LSIs are rapidly progressed, human voice synthesizing devices are put into practical use for portable calculators, clocks, vending machines, translating machines and so forth. In order to meet the demand, Murata has developed. Piezoelectric Speaker best suited for making synthesized voice or melody.

### ■ Features

1. High efficiency compared with conventional electromagnetic type speakers.
2. Ultra-thin and light-weight.
3. High impedance with less power consumption.
4. No electric noise, because they have no mechanical contacts.
5. Direct drive by IC is available.

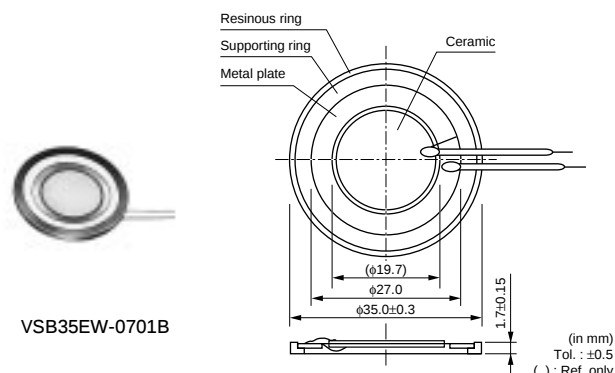



VSB35EW-0701B

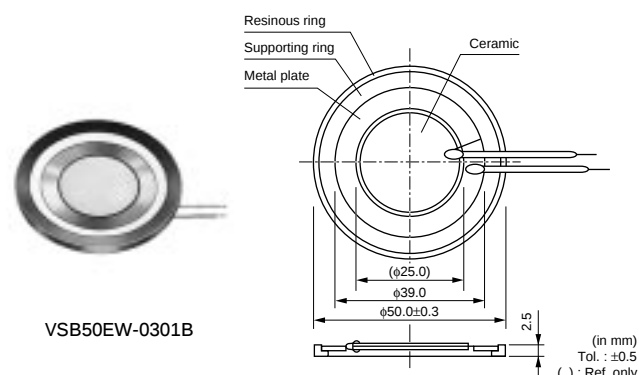

VSB50EW-0301B

| Part Number   | Oscillating Frequency Range | Resonant Frequency (Hz)  | Impedance (ohm) | Capacitance (nF)       | Maximum Input (mW) | Operating Temperature Range | Storage Temperature Range |
|---------------|-----------------------------|--------------------------|-----------------|------------------------|--------------------|-----------------------------|---------------------------|
| VSB35EW-0701B | 600Hz to 20kHz              | 950 $\pm 150$ Hz[Lowest] | 600[1kHz]       | 340 $\pm 35\%$ [120Hz] | 75                 | -20 to +70°C                | -30 to +80°C              |
| VSB50EW-0301B | 250Hz to 20kHz              | 400 $\pm 150$ Hz[Lowest] | 300[1kHz]       | 600 $\pm 35\%$ [120Hz] | 150                | -20 to +70°C                | -30 to +80°C              |



### ■ Freq. Response (Sine Wave 1Vrms, 10cm)

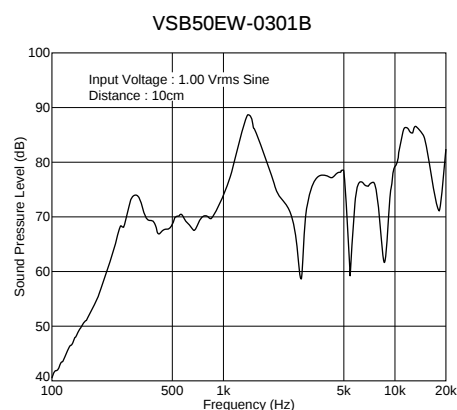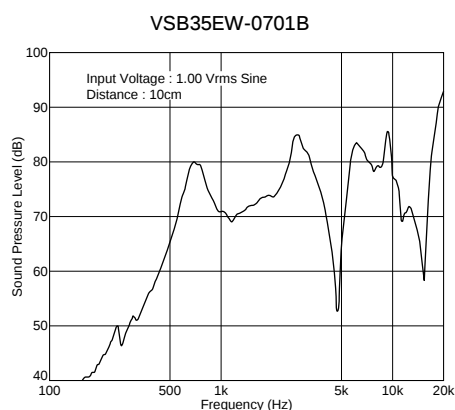

Continued on the following page.

 Continued from the preceding page.

■ Impedance-Frequency Characteristics

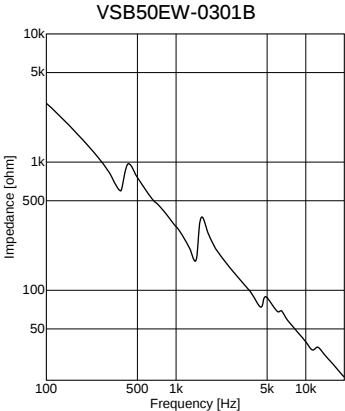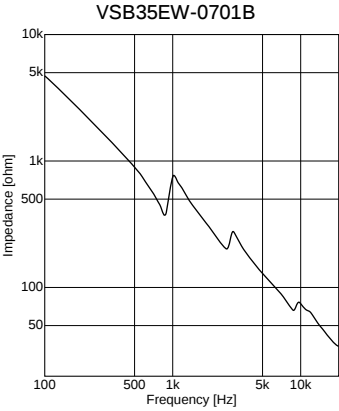


## Piezoelectric Speakers (CERAMITONE®) Notice

### ■ Notice (Soldering and Mounting)

1. Applying load on the center area of the speaker may cause clack in the ceramic element. When the speaker is supported by edge, the load should be only applied around edge.
2. Washing of the component is not acceptable, because it is not sealed.

### ■ Notice (Handling)

1. Please do not touch the component with bare hand because electrode may be corroded.
2. The component may be damaged if mechanical stress over this specification is applied.
3. Please pay attention to protect operating circuit from surge voltage provided by something of force such as falling, shock and temperature changing.
4. If DC voltage is applied to the component, silver migration may occur. Please pay full attention not to subject the component to DC voltage for long periods.
5. The resistor should be used as shown in Fig. A.  
A suitable resistance value should be chosen, preferably  $1k\Omega$  to  $2k\Omega$ . Instead of this measure, a diode may also be applied as shown in Fig. B.

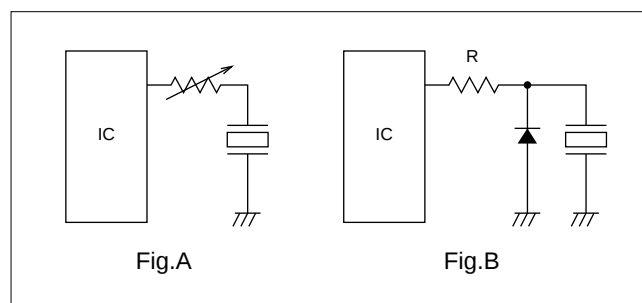

6. Please pay enough attention not to pull lead wire too much because wire may be broken or soldering point may come off.

## Package

### ■ Minimum Quantity (pcs.)

| Products Name                                     | Part Number       | Minimum Quantity (pcs.) |            |           |          |
|---------------------------------------------------|-------------------|-------------------------|------------|-----------|----------|
|                                                   |                   | ø330mmReel              | Bulk (Box) | Ammo Pack | Magazine |
| ● Piezoelectric Diaphragms<br>External Drive Type | 7BB-12-9          |                         | 5120       |           |          |
|                                                   | 7BB-15-6          |                         | 8000       |           |          |
|                                                   | 7BB-20-3          |                         | 3000       |           |          |
|                                                   | 7BB-20-4          |                         | 2400       |           |          |
|                                                   | 7BB-20-6          |                         | 1800       |           |          |
|                                                   | 7BB-20-6A0        |                         | 600        |           |          |
|                                                   | 7BB-27-4          |                         | 1500       |           |          |
|                                                   | 7BB-27-4A0        |                         | 600        |           |          |
|                                                   | 7BB-35-3          |                         | 800        |           |          |
|                                                   | 7BB-35-3A0        |                         | 400        |           |          |
|                                                   | 7BB-41-2          |                         | 400        |           |          |
|                                                   | 7BB-41-2A0        |                         | 250        |           |          |
|                                                   | 7BB-50M-1         |                         | 600        |           |          |
|                                                   | 7SB-20-7          |                         | 1800       |           |          |
|                                                   | Self Drive Type   |                         |            |           |          |
|                                                   | 7BB-20-6C         |                         | 1800       |           |          |
|                                                   | 7BB-20-6CA0       |                         | 600        |           |          |
|                                                   | 7BB-27-3C         |                         | 2400       |           |          |
|                                                   | 7BB-27-4C         |                         | 1500       |           |          |
|                                                   | 7BB-27-4CA0       |                         | 600        |           |          |
|                                                   | 7BB-35-3C         |                         | 800        |           |          |
|                                                   | 7BB-35-3CA0       |                         | 400        |           |          |
|                                                   | 7BB-41-2C         |                         | 600        |           |          |
|                                                   | 7BB-41-2CA0       |                         | 250        |           |          |
|                                                   | 7NB-27-2C         |                         | 3000       |           |          |
|                                                   | 7NB-27-3C         |                         | 3000       |           |          |
|                                                   | 7NB-27-4C         |                         | 3000       |           |          |
|                                                   | 7SB-34R7-3C       |                         | 1600       |           |          |
| ● Piezoelectric Sounders<br>External Drive Type   | PKM13EPY-4000-A0  |                         |            | 500       |          |
|                                                   | PKM13EPY-4002-B0  |                         | 330        |           |          |
|                                                   | PKM17EPP-2002-B0  |                         | 200        |           |          |
|                                                   | PKM17EPP-4001-B0  |                         | 200        |           |          |
|                                                   | PKM17EPT-4001-B0  |                         | 180        |           | 70*      |
|                                                   | PKM17EW-2001      |                         | 250        |           |          |
|                                                   | PKM22EP-2001      |                         | 360        |           |          |
|                                                   | PKM22EPP-2001-B0  |                         | 750        |           |          |
|                                                   | PKM22EPP-4001-B0  |                         | 900        |           |          |
|                                                   | PKM22EPP-4005-B0  |                         | 750        |           |          |
|                                                   | PKM22EPP-4007-B0  |                         | 750        |           |          |
|                                                   | PKM22EPT-2001-B0  |                         | 300        |           | 75*      |
|                                                   | PKM22EPT-4001-B0  |                         | 300        |           |          |
|                                                   | PKM17EW-4000      |                         | 500        |           |          |
|                                                   | PKLCS1212E4001-R1 | 1000                    |            |           |          |
|                                                   | Self Drive Type   |                         |            |           |          |
|                                                   | PKM24SP-3805      |                         | 360        |           |          |
|                                                   | PKM30SPT-2001-B0  |                         | 70         |           |          |
|                                                   | PKM30SPT-2501-B0  |                         | 70         |           |          |
| ● Piezoelectric Buzzers                           | PKB24SPC-3601-B0  |                         | 650        |           |          |
|                                                   | PKB24SW-3301      |                         | 200        |           |          |
|                                                   | PKB30SPC-2001-B0  |                         | 80         |           |          |
|                                                   | PKB30SPC-3001-B0  |                         | 80         |           |          |
| ● Piezoelectric Ringers (PIEZORINGER®)            | PKM33EP-1201C     |                         | 300        |           |          |
|                                                   | PKM34EW-1101C     |                         | 25         |           |          |
|                                                   | PKM34EW-1201C     |                         | 25         |           |          |
|                                                   | PKM44EP-0901      |                         | 160        |           |          |
|                                                   | PKM44EW-1001C     |                         | 25         |           |          |
| ● Piezoelectric Receiver                          | PKLCD1212R1000-R1 | 1500                    |            |           |          |
| ● Piezoelectric Speakers (CERAMITONE®)            | VSB35EW-0701B     |                         | 160        |           |          |
|                                                   | VSB50EW-0301B     |                         | 80         |           |          |

\*The last two digits are changed to M0.

**⚠ Note:**

**1. Export Control**

〈For customers outside Japan〉

Murata products should not be used or sold for use in the development, production, stockpiling or utilization of any conventional weapons or mass-destructive weapons (nuclear weapons, chemical or biological weapons, or missiles), or any other weapons.

〈For customers in Japan〉

For products which are controlled items subject to the "Foreign Exchange and Foreign Trade Law" of Japan, the export license specified by the law is required for export.

**2. Please contact our sales representatives or product engineers before using our products listed in this catalog for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property, or when intending to use one of our products for other applications than specified in this catalog.**

- ① Aircraft equipment
- ② Aerospace equipment
- ③ Undersea equipment
- ④ Power plant equipment
- ⑤ Medical equipment
- ⑥ Transportation equipment (vehicles, trains, ships, etc.)
- ⑦ Traffic signal equipment
- ⑧ Disaster prevention / crime prevention equipment
- ⑨ Data-processing equipment
- ⑩ Application of similar complexity and/or reliability requirements to the applications listed in the above

**3. Product specifications in this catalog are as of January 2002. They are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before your ordering. If there are any questions, please contact our sales representatives or product engineers.**

**4. Please read CAUTION and Notice in this catalog for safety. This catalog has only typical specifications. Therefore you are requested to approve our product specification or to transact the approval sheet for product specification, before your ordering.**

**5. Please note that unless otherwise specified, we shall assume no responsibility whatsoever for any conflict or dispute that may occur in connection with the effect of our and/or third party's intellectual property rights and other related rights in consideration of your using our products and/or information described or contained in our catalogs. In this connection, no representation shall be made to the effect that any third parties are authorized to use the rights mentioned above under licenses without our consent.**

**6. None of ozone depleting substances (ODS) under the Montreal Protocol is used in manufacturing process of us.**



<http://www.murata.co.jp/products/>

**Head Office**

2-26-10, Tenjin Nagaokakyo-shi, Kyoto 617-8555, Japan Phone:81-75-951-9111

**International Division**

3-29-12, Shibuya, Shibuya-ku, Tokyo 150-0002, Japan  
Phone:81-3-5469-6123 Fax:81-3-5469-6155 E-mail:intl@murata.co.jp