


Features

- Schottky Barrier Chip
- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- High Surge Capability
- High Current Capability and Low Forward Voltage Drop
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Application
- Plastic Material: UL Flammability Classification Rating 94V-0

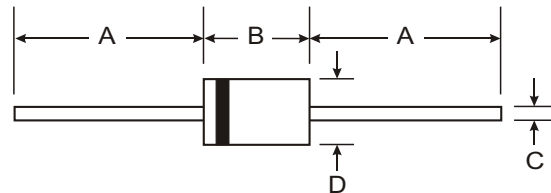

DO-41 Plastic		
Dim	Min	Max
A	25.40	—
B	4.06	5.21
C	0.71	0.864
D	2.00	2.72
All Dimensions in mm		

Mechanical Data

- Case: Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.3 grams (approx)
- Mounting Position: Any
- Marking: Type Number

Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

Characteristic	Symbol	1N5817	1N5818	1N5819	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	20	30	40	V
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	V
Average Rectified Output Current (Note 1) @ $T_L = 90^{\circ}C$	I_O	1.0			A
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	25			A
Forward Voltage (Note 2) @ $I_F = 1.0A$ @ $I_F = 3.0A$	V_{FM}	0.450 0.750	0.550 0.875	0.60 0.90	V
Peak Reverse Leakage Current @ $T_A = 25^{\circ}C$ at Rated DC Blocking Voltage (Note 2) @ $T_A = 100^{\circ}C$	I_{RM}	1.0 10			mA
Typical Total Capacitance (Note 3)	C_T	110			pF
Typical Thermal Resistance Junction to Lead (Note 4)	$R_{\theta JL}$	15			$^{\circ}C/W$
Typical Thermal Resistance Junction to Ambient	$R_{\theta JA}$	50			
Operating and Storage Temperature Range	T_j, T_{STG}	-65 to +125			$^{\circ}C$

- Notes:
1. Measured at ambient temperature at a distance of 9.5mm from the case.
 2. Short duration test pulse used to minimize self-heating effect.
 3. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
 4. Thermal resistance from junction to lead vertical P.C.B. mounted, 0.375" (9.5mm) lead length with 1.5 x 1.5" (38 x 38mm) copper pads.

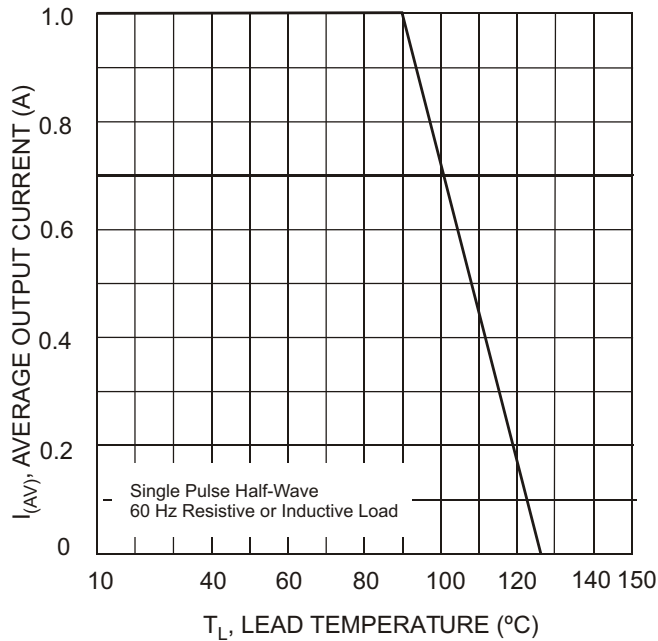


Fig. 1 Forward Current Derating Curve

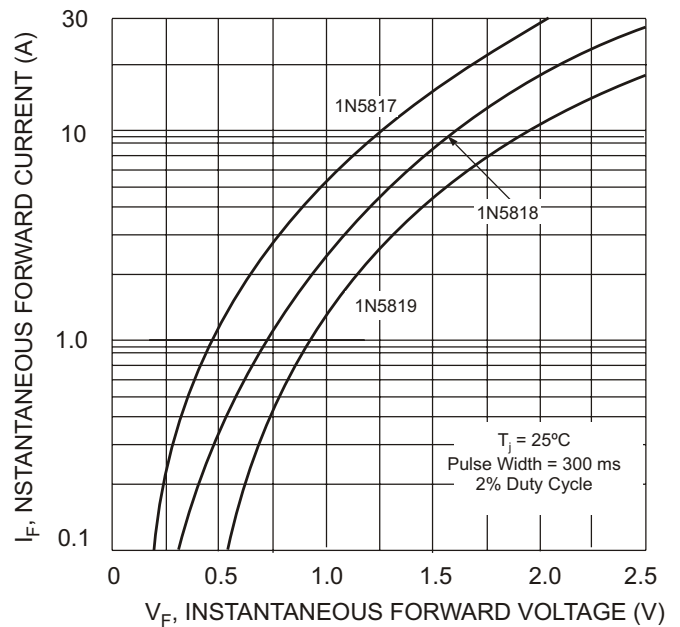


Fig. 2 Typical Forward Characteristics

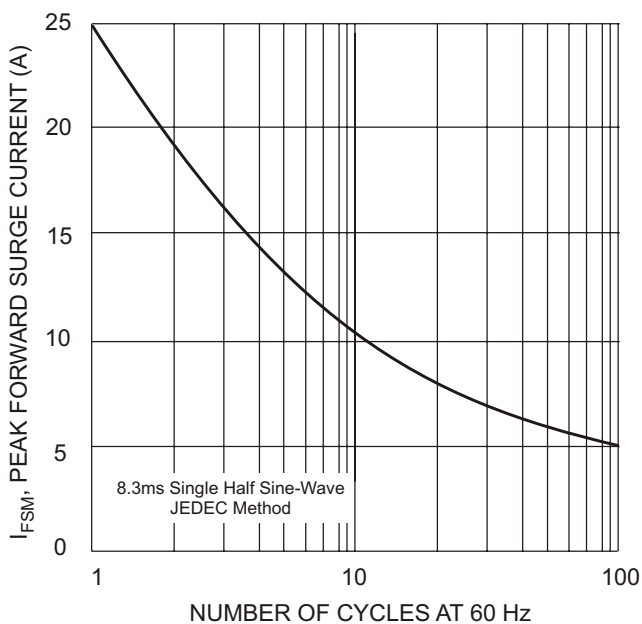


Fig. 3 Maximum Non-Repetitive Peak Fwd Surge Current

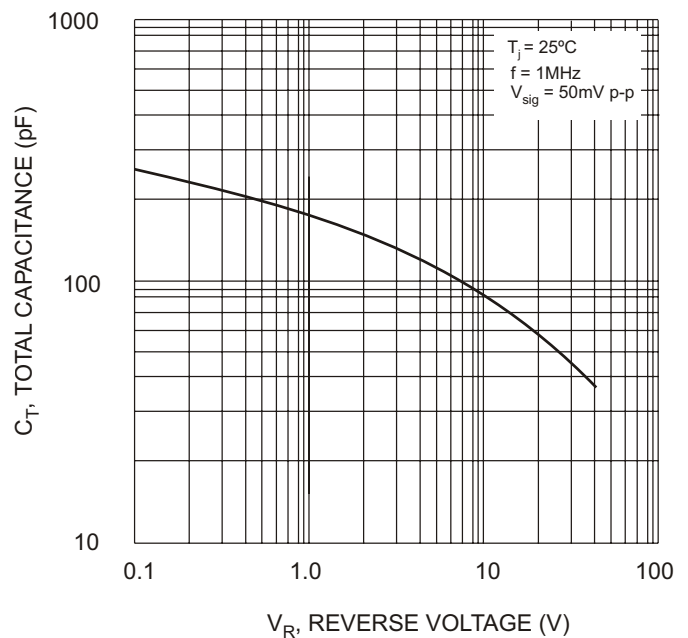


Fig. 4 Typical Total Capacitance

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.