


BY396 THRU BY399



3.0 AMP FAST RECOVERY RECTIFIERS



FEATURES

- * Low forward voltage drop
- * High current capability
- * High reliability
- * High surge current capability

MECHANICAL DATA


- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 1.10 grams

VOLTAGE RANGE

50 to 1000 Volts

CURRENT

3.0 Ampere

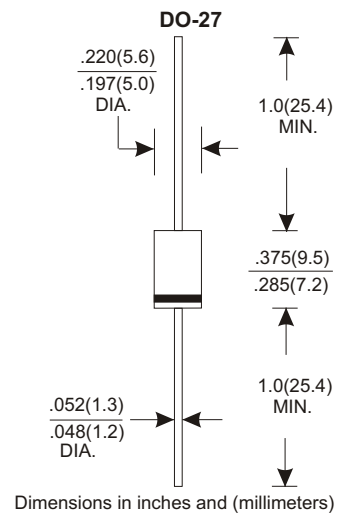

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	By396	BY397	BY398	By399	UNITS
Maximum Recurrent Peak Reverse Voltage	100	200	400	800	V
Maximum RMS Voltage	70	140	280	560	V
Maximum DC Blocking Voltage	100	200	400	800	V
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at Ta=75°C	3.0				A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	200				A
Maximum Instantaneous Forward Voltage at 3.0A	1.25				V
Maximum DC Reverse Current Ta=25°C	5.0				A
at Rated DC Blocking Voltage Ta=100°C	150				A
Maximum Reverse Recovery Time (Note 1)	150			250	nS
Typical Junction Capacitance (Note 2)	60				pF
Operating and Storage Temperature Range Tj, TSTG	-65 — +150				°C

NOTES:

1. Reverse Recovery Time test condition: IF=0.5A, IR=1.0A, IRR=0.25A
2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.