


Conformity to RoHS Directive

SHAPES AND DIMENSIONS

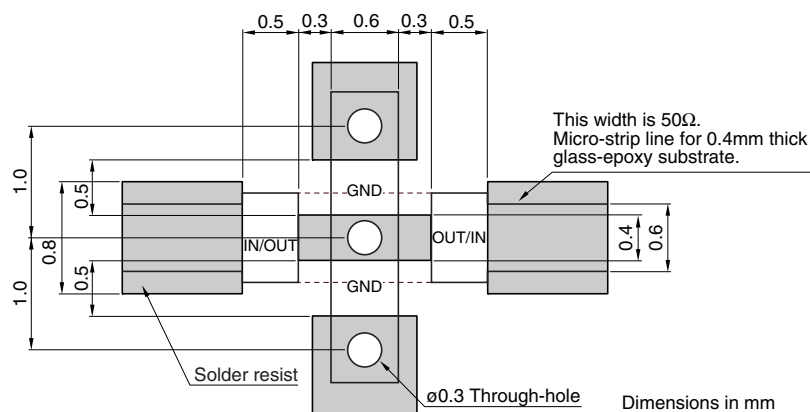


Item			Minimum value	Typical value	Maximum value
Insertion loss	[880 to 915MHz]	(dB)	—	0.25	0.60
	[925 to 960MHz]	(dB)	—	0.25	0.60
	[1710 to 1785MHz]	(dB)	—	0.30	0.60
	[1850 to 1910MHz]	(dB)	—	0.30	0.60
	[1930 to 1990MHz]	(dB)	—	0.35	0.60
Attenuation	[3700 to 3980MHz]	(dB)	30	42	—
	[5550 to 5970MHz]	(dB)	25	40	—
Temperature range	Operating	(°C)	−40	—	+85
	Storage	(°C)	−40	—	+85

- Ta: $+25 \pm 5^\circ\text{C}$


- All specifications are subject to change without notice.

FREQUENCY CHARACTERISTICS


INSERTION LOSS

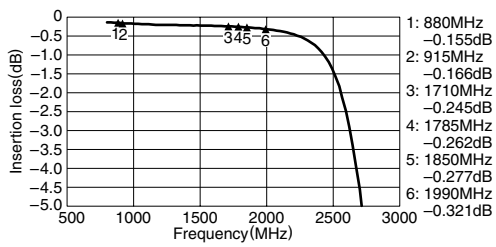

RETURN LOSS

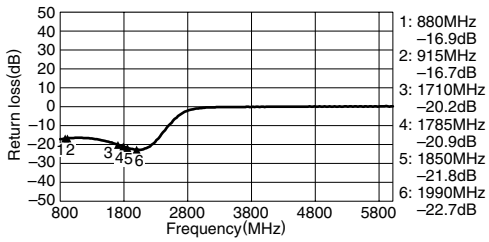

ATTENUATION

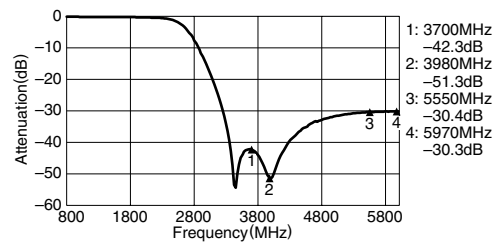

VSWR

