



SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE	(6F)
	Sn100%	No	No	
LF3	Sn100%	Yes	Yes	

TERM. NO.'s FOR REF. ONLY






DOT LOCATES TERM. #1

LOT CODE & DATE CODE

SOLDER SUFFIX

(6F)

NOTCH LOCATES TERM. #1 & 4 SIDE

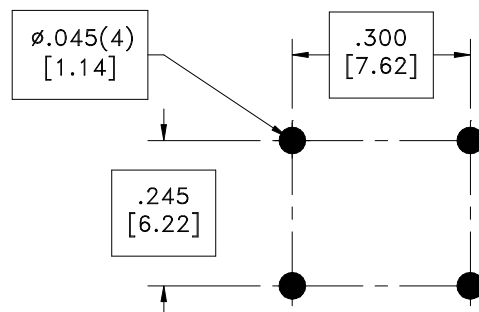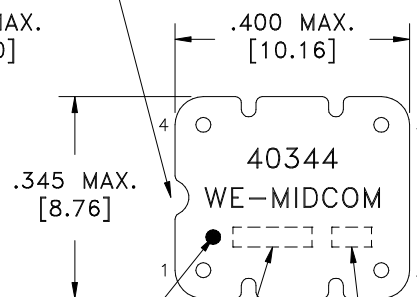

TERMINAL PAD DIMENSIONS
CUSTOMER TO DETERMINE LAND SIZE

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

D.C. RESISTANCE (@20°C): 1-2, 0.32 ohms $\pm 10\%$.
3-4, 0.32 ohms $\pm 10\%$.

DIELECTRIC RATING: 500VAC for 1 second between 1-4.

INDUCTANCE: 4.7mH $\pm 30\%$, 10kHz, 100mVAC, 1-2, Ls.

TURNS RATIO: (1-2):(4-3) = 1:1, $\pm 1\%$.

DETAILS SUBJECT TO CHANGE

Midcom, Inc.

Watertown, SD USA
Toll Free: 800-643-2661
Fax: 605-886-4486

This drawing is dual dimensioned.
Dimensions in brackets are in millimeters.

Unless otherwise specified:
Tolerances: Fractions: $\pm 1/64$
Angles: $\pm 1^\circ$ Decimals: $\pm .005$ [.13]

DRAWING TITLE

INDUCTOR

REVISIONS: SEE SHEET 1

Midcom

DRAWING NO.

40344R/-LF3

(6F)

REV.

6F
12/08

SCALE ---

SHEET 2 OF 5

DWG.#
40344R/-LF3