

SPECIFICATION OF FBCA SERIES

FEATURES

Use flat wire in it and could endure higher current (6Amps).
It is mounted in the boards with surface mounting equipment.




APPLICATIONS

1. Computer products.
(Mother board , Hard Disk , TV card..Etc.)
2. Communication products.
(like : PAGER , Cordless Phone..Etc.)
3. Modem , OA products , power supplier..Etc.
4. Countermeasures for complying with CE 、
FCC 、VDE or VCCI radiated emissions.

ORDERING CODE

FBCA - A78 - 302540 - L - T
(1) (2) (3) (4) (5)

- (1) PRODUCT TYPE CODE
- (2) MATERIAL CODE
- (3) SIZE CODE
- (4) DESIGN CODE
- (5) TAPING

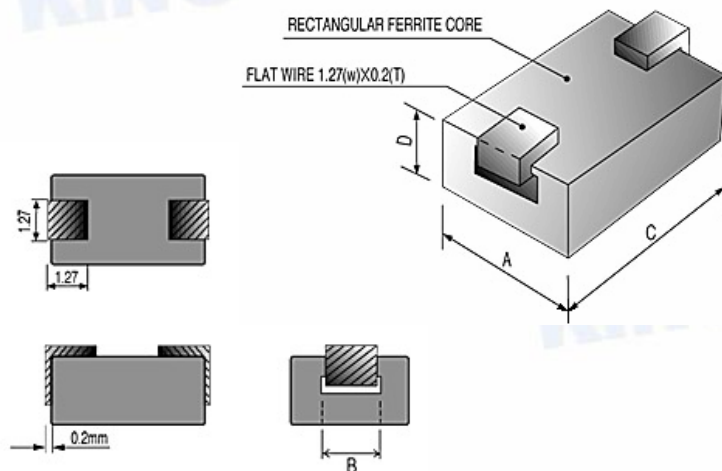








SHAPE & DIMENSIONS

UNIT:mm

ORDERING CODE	A	B	C	D	RDC	Z+/-25%(Ω) (Average)		RATED CURRENT (mA)max
					(mΩ)max	25MHz	100MHz	
FBCA-K5B-302340-L1-T	3.00±0.20	1.45±0.10	4.00±0.30	2.3(+0.0/-0.4)	4	28	45	9000
FBCA-A78-302385-L-T	3.00±0.20	1.45±0.10	8.50±0.30	2.30±0.10	6	60	96	6000
FBCA-A78-302540-L-T	3.00±0.20	1.45±0.10	4.00±0.25	2.55±0.15	6	30	49	6000
FBCA-K5B-302540-L1-T	3.00±0.20	1.45±0.10	4.00±0.25	2.55±0.15	4	30	50	9000
FBCA-A78-302585-L-T	3.00±0.20	1.45±0.10	8.50±0.30	2.55±0.15	9	55	101	6000
FBCA-78-302585-L1-T	3.00±0.30	1.50±0.50	8.50±0.40	2.50±0.30	9	58	100	13000
FBCA-A78-473078-L-T	4.75±0.20	1.45±0.10	7.80±0.30	3.00±0.15	9	69	97	6000

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

WOUND CHIP BEADS → FBCA SERIES



※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.



KING CORE ELECTRONICS INC.

Tel: 886-3-4698855

Fax: 886-3-4691395

No. 269, Nanfong Rd., Pingjhen City, Taoyuan County, Taiwan

E-mail: kc@mail.kingcore.com.tw

Web Site: <http://www.kingcore.com.tw>