

Am2615/9615

Dual Differential Line Receivers

Distinctive Characteristics:

- Dual differential receiver (Am9615) pin-for-pin equivalent to the Fairchild 9615
- Dual differential receiver for single-ended data (Am2615)
- Single 5-volt supply
- High common-mode voltage range (± 15 volts)

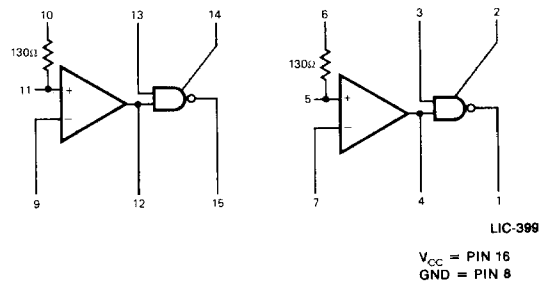
- Frequency response control, strobe, and internal terminating resistor
- Am2615 has fail safe capability
- Choice of uncommitted collector or active pull-up outputs
- 100% reliability assurance testing in compliance with MIL-STD-883

FUNCTIONAL DESCRIPTION


The Am2615 and Am9615 are dual differential line receivers designed to receive digital data from transmission lines and operate over the military and industrial temperature ranges using a single 5 volt supply. The Am2615 can receive 3 volt single ended and the Am9615 ± 500 mV differential data in the presence of high level (± 15 V) common mode voltages and deliver undisturbed logic levels to the following DTL or TTL circuitry. The response time of each receiver and thereby immunity to AC noise can be controlled by an external capacitor. A strobe is provided for each receiver together with a 130Ω input terminating resistor. Each output has an uncommitted collector with an active pull-up network available on an adjacent pin.

The Am2615 is identical to the Am9615 except for the input offset (threshold) voltage. The Am2615 has an input threshold of ~ 1.5 V compatible with DTL & TTL logic. The Am9615 has an input threshold of ~ 0 V. The Am2615 can directly replace the Am9615 and give fail safe protection in differential systems where the input difference is > 2.0 V.

LOGIC DIAGRAM




CIRCUIT DIAGRAM

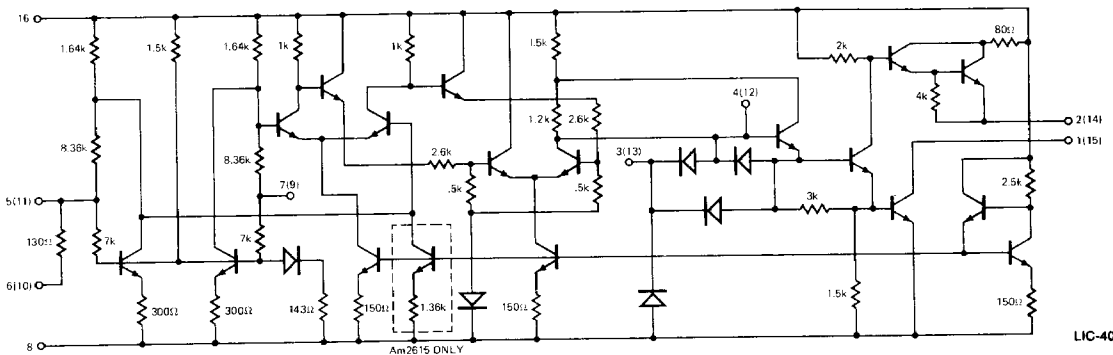

ORDERING INFORMATION

Part Number	Package Type	Temperature Range	Order Number
Am2615	Hermetic DIP	-55°C to $+125^{\circ}\text{C}$	AM2615DM
	Flat Pak	-55°C to $+125^{\circ}\text{C}$	AM2615FM
	Dice	-55°C to $+125^{\circ}\text{C}$	AM2615XM
	Hermetic DIP	0°C to $+75^{\circ}\text{C}$	AM2615DC
	Molded DIP	0°C to $+75^{\circ}\text{C}$	AM2615PC
	Dice	0°C to $+75^{\circ}\text{C}$	AM2615XC
Am9615	Hermetic DIP	-55°C to $+125^{\circ}\text{C}$	9615DM
	Flat Pak	-55°C to $+125^{\circ}\text{C}$	9615FM
	Dice	-55°C to $+125^{\circ}\text{C}$	AM9615XM
	Hermetic DIP	0°C to $+75^{\circ}\text{C}$	9615DC
	Molded DIP	0°C to $+75^{\circ}\text{C}$	9615PC
	Dice	0°C to $+75^{\circ}\text{C}$	AM9615XC

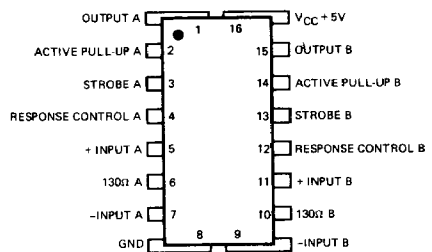CONNECTION DIAGRAM Top View



NOTE: PIN 1 is marked for orientation.

Am2615/9615**MAXIMUM RATINGS** (Above which the useful life may be impaired)

Storage Temperature	–65°C to +150°C
Temperature (Ambient) Under Bias	–55°C to +125°C
Supply Voltage to Ground Potential (Pin 16 to Pin 8) Continuous	–0.5 V to +7 V
DC Voltage Applied to Outputs for HIGH Output State	–0.5 V to +13.2 V
DC Strobe Input Voltage	–0.5 V to +5.5 V
DC Data Input Voltage	–20 V to +20 V
Output Current, Into Outputs	30 mA
DC Input Current	maximum current is defined by DC Input Voltage

Am2615 ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Am2615XM	V _{CC} = 4.5 V to 5.5 V	T _A = –55°C to +125°C	(MIL grade)
Am2615XC	V _{CC} = 4.75 V to 5.25 V	T _A = 0°C to +75°C	(COM'L grade)

Parameters	Description	Test Conditions	LIMITS								Units
			T _A = Min		T _A = 25°C			T _A = Max			
			Min	Max	Min	Typ	Max	Min	Max		
V _{OH}	Output HIGH Voltage	V _{CC} = MIN, I _{OH} = –5.0 mA V _{IN+} = +0.8 V, V _{IN–} = 0 V	2.4		2.4	3.2		2.4		Volts	
V _{OL}	Output LOW Voltage	V _{CC} = MAX I _{OH} = 15.0 mA V _{IN+} = +2.0 V, V _{IN–} = 0 V								Volts	
		MIL grade	0.40	.18	0.40	0.40					
		COM'L grade	0.45	.25	0.45		0.45				
I _{CEX}	Output Leakage Current	V _{CC} = MIN V _{IN+} = 0 V V _{IN–} = 4.5 V								μA	
		V _{CEX} = 12 V V _{CEX} = 5.25 V	MIL grade	100	100	200					
I _{SC}	Output Short Circuit Current	V _{CC} = MAX V _{OUT} = 0 V V _{IN+} = +0.8 V V _{IN–} = 0 V								mA	
		MIL grade	–15	–80	–15	–39	–80	–15	–80		
		COM'L grade	–14	–100	–14	–39	–100	–14	–100		
I _{IL}	Input Load Current	V _{CC} = MAX V _{IN} = V _{OL MAX} , other input = V _{CC}	–0.9		–0.49	–0.7		–0.7		mA	
I _{IL(ST)}	Strobe Input Low Current	V _{CC} = MAX V _{ST} = V _{OL MAX} V _{IN+} = +2.0 V V _{IN–} = 0 V	–2.4		–1.15	–2.4		–2.4		mA	
I _{IL(RC)}	Response Control Input Load Current	V _{CC} = MAX V _{RC} = V _{OL MAX} V _{IN+} = +2.0 V V _{IN–} = 0 V			–1.2	–3.4				mA	
V _{CM}	Common Mode Voltage	V _{CC} = 5.0 V V _{IN+} - V _{IN–} = 0.4 or 2.4 V	–15	+15	–15	±17.5	+15	–15	+15	V	
I _{IH(ST)}	Strobe Input HIGH Current	V _{CC} = MIN V _{ST} = 4.5 V V _{IN+} = +0.8 V V _{IN–} = 0 V								μA	
		MIL grade				2.0	5.0				
		COM'L grade					5.0	10.0			
R _{IN}	Input Resistor	V _{CC} = 5.0 V V _{IN+} = 0 V V _{RES} = 1.0 V								Ω	
		MIL grade		77	130	167					
		COM'L grade			74	130	179				
V _{TH}	Differential Input Threshold Voltage	V _{CM} = 0 V	+0.8	+2.0	+0.8	+1.5	+2.0	+0.8	+2.0	V	
I _{CC}	Power Supply Current	V _{CC} = MAX V _{IN+} = +2.0 V V _{IN–} = 0 V								mA	
		MIL grade	50	28.7	50	50					
		COM'L grade	50	28.7	50		50				

Switching Characteristics (T_A = 25°C)

Parameters	Test Conditions	Am2615XM			Am2615XC			Units
		Min	Typ	Max	Min	Typ	Max	
t _{pd+}	Turn Off Delay R _L = 3.9 kΩ	V _{CC} = 5.0 V, C _L = 30 pF Refer to figure 4	30	50		30	75	ns
t _{pd–}	Turn On Delay R _L = 390 Ω		30	50		30	75	
t _{pd+}	Turn Off Delay Strobe to Output	R _L = 3.9 kΩ, C _L = 30 pF	7	12		7	15	ns
t _{pd–}	Turn On Delay Strobe to Output	R _L = 390 Ω	10	15		10	20	

Am9615 ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE











Am9615XM $V_{CC} = 4.5\text{ V to } 5.5\text{ V}$ $T_A = -55^\circ\text{ C to } +125^\circ\text{ C}$ (MIL grade)
 Am9615XC $V_{CC} = 4.75\text{ V to } 5.25\text{ V}$ $T_A = 0^\circ\text{ C to } +75^\circ\text{ C}$ (COM'L grade)

			LIMITS									
Parameters	Description	Test Conditions	$T_A = \text{Min}$		$T_A = 25^\circ\text{C}$			$T_A = \text{Max}$		Units		
			Min	Max	Min	Typ	Max	Min	Max			
V_{OH}	Output HIGH Voltage	$V_{CC} = \text{MIN}$, $I_{OH} = -5.0\text{ mA}$ $V_{IN+} = -0.5\text{ V}$, $V_{IN-} = 0\text{ V}$	2.4		2.4	3.2		2.4		Volts		
V_{OL}	Output LOW Voltage	$V_{CC} = \text{MAX}$ $I_{OH} = 15.0\text{ mA}$ $V_{IN+} = +0.5\text{ V}$, $V_{IN-} = 0$		MIL grade	0.40	.18	0.40		0.40	Volts		
			COM'L grade	0.45	.25	0.45		0.45				
I_{CEX}	Output Leakage Current	$V_{CC} = \text{MIN}$ $V_{IN+} = 0\text{ V}$ $V_{IN-} = V_{CC}$		$V_{CEX} = 12\text{ V}$ MIL grade $V_{CEX} = 5.25\text{ V}$ COM'L grade	100		100		200	μA		
I_{SC}	Output Short Circuit Current	$V_{CC} = \text{MAX}$ $V_{OUT} = 0\text{ V}$ $V_{IN+} = -0.5\text{ V}$ $V_{IN-} = 0\text{ V}$		MIL grade	-15	-80	-15	-39	-80	-15	-80	mA
			COM'L grade	-14	-100	-14	-39	-100	-14	-100		
I_{IL}	Input Load Current	$V_{CC} = \text{MAX}$ $V_{IN} = V_{OL\text{ MAX}}$, other input = V_{CC}			-0.9		-0.49	-0.7		-0.7	mA	
$I_{IL(ST)}$	Strobe Input Low Current	$V_{CC} = \text{MAX}$ $V_{IN+} = +0.5\text{ V}$ $V_{ST} = V_{OL\text{ MAX}}$ $V_{IN-} = 0\text{ V}$			-2.4		-1.15	-2.4		-2.4	mA	
$I_{IL(RC)}$	Response Control Input Load Current	$V_{CC} = \text{MAX}$ $V_{IN+} = +0.5\text{ V}$ $V_{RC} = V_{OL\text{ MAX}}$ $V_{IN-} = 0\text{ V}$					-1.2	-3.4			mA	
V_{CM}	Common Mode Voltage	$V_{CC} = 5.0\text{ V}$ $V_{IN+} - V_{IN-} = \pm 2.0\text{ V}$	-15	+15	-15	± 17.5	+15	-15	+15		V	
$I_{IH(ST)}$	Strobe Input HIGH Current	$V_{CC} = \text{MIN}$ $V_{ST} = 4.5\text{ V}$ $V_{IN+} = -0.5\text{ V}$ $V_{IN-} = 0\text{ V}$		MIL grade				2.0		5.0	μA	
			COM'L grade				5.0		10.0			
R_{IN}	Input Resistor	$V_{CC} = 5.0\text{ V}$ $V_{IN+} = 0\text{ V}$ $V_{RES} = 1.0\text{ V}$		MIL grade		77	130	167			Ω	
			COM'L grade		74	130	179					
V_{TH}	Differential Input Threshold Voltage	$V_{CM} = 0\text{ V}$	-0.5	+0.5	-0.5	± 0.02	+0.5	-0.5	+0.5		V	
I_{CC}	Power Supply Current	$V_{CC} = \text{MAX}$ $V_{IN+} = +0.5\text{ V}$ $V_{IN-} = 0\text{ V}$		MIL grade	50		28.7	50		50	mA	
			COM'L grade	50		28.7	50		50			

Switching Characteristics ($T_A = 25^\circ\text{C}$)

Switching Characteristics (T _A = 25°C)											
Parameters			Test Conditions		Min	Am9615XM Typ	Max	Min	Am9615XC Typ	Max	Units
t _{pd+}	Turn Off Delay	R _L = 3.9 kΩ	V _{CC} = 5.0 V, C _L = 30 pF			30	50		30	75	ns
t _{pd-}	Turn On Delay	R _L = 390 Ω	Refer to figure 4			30	50		30	75	
t _{pd+}	Turn Off Delay	Strobe to Output	R _L = 3.9 kΩ, C _L = 30 pF			7	12		7	15	ns
t _{pd-}	Turn On Delay	Strobe to Output	R _L = 390 Ω			10	15		10	20	





D. C. CHARACTERISTICS

Output Low Voltage
Versus
Output Low CurrentOutput High Voltage
Versus
Output High CurrentOutput Voltage Versus
Ambient TemperatureStrobe Input-Output
Transfer Characteristic
Versus V_{CC} Strobe Input-Output
Transfer Characteristic
Versus Ambient TemperatureOutput Voltage Versus Common
Mode Voltage (Am9615)Input Current Versus
Input VoltagePower Supply Current
Versus
Power Supply VoltagePower Supply Current
Versus
Ambient TemperatureSwitching Time
Versus
Ambient Temperature

THRESHOLD CHARACTERISTICS

Am2615

Am9615

Input-Output Transfer
Characteristic
Versus V_{CC} Input-Output Transfer
Characteristic
Versus TemperatureInput-Output Transfer
Characteristic
Versus V_{CC} Input-Output Transfer
Characteristic
Versus Temperature

LIC-403

SWITCHING TIME TEST CIRCUIT & WAVEFORMS


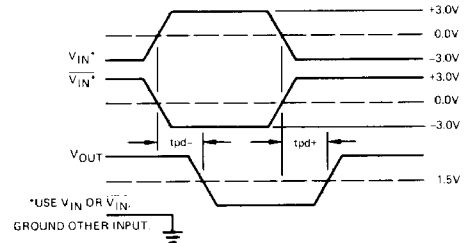
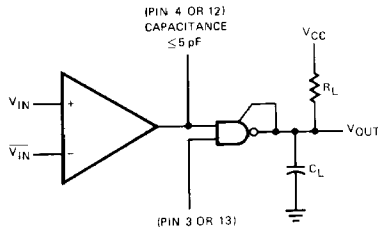


Figure 4


LIC-404

LIC-405

FREQUENCY RESPONSE CONTROL



LIC-406

Frequency Response
Versus Capacitance


LIC-407

Am2615/9615 LOADING RULES

	Input/Output	Pin No.'s	Input Unit Load	Fanout	
				Output HIGH	Output LOW
Receiver A	Out	1	—	o/c	10
	Active Pull-Up	2	—	83	—
	Response Control	3	—	—	—
	Strobe	4	1.5	—	—
	+ In	5	0.5	—	—
	130 Ω	6	—	—	—
	— In	7	0.5	—	—
	GND	8	—	—	—
Receiver B	— In	9	0.5	—	—
	130 Ω	10	—	—	—
	+ In	11	0.5	—	—
	Response Control	12	—	—	—
	Strobe	13	1.5	—	—
	Active Pull-Up	14	—	83	—
	Out	15	—	o/c	10
	VCC	16	—	—	—

Am2615 STANDARD USAGE

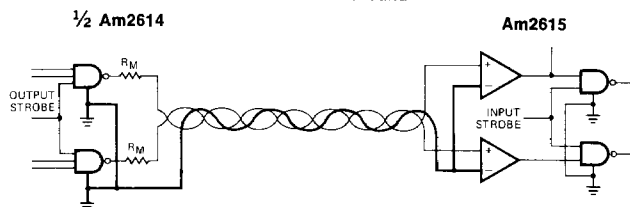
Single-Ended-Back Matched Operation With Common Ground



LIC-408


Am9615 STANDARD USAGE

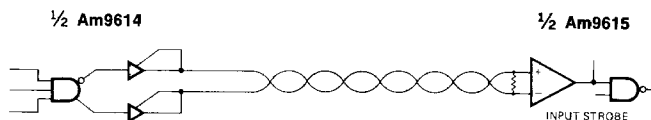Differential Operation




LIC-409

Photograph of an Am9615
switching differential data in
the presence of high common
mode noise.




LIC-410

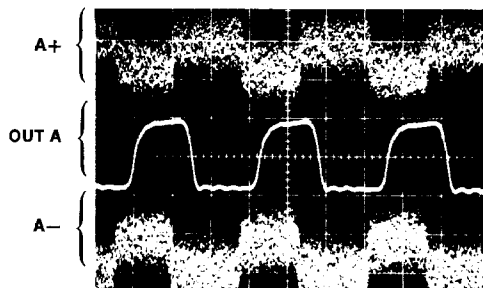Vertical = 2.0 V/Div. Horizontal = 50 ns/Div.



Metallization and Pad Layout



53 X 58 Mils