



FLUO

W

POTENZA
POWER
LEISTUNG
PUISSANCE

18÷58

V

TENSIONE
VOLTAGE
SPANNUNG
TENSION







230
240

Hz

FREQUENZA
FREQUENCY
FREQUENZ
FREQUENCE

50

LAMPADE
LAMPS
LAMPEN
LAMPES




Alimentatori a basse perdite per lampade fluorescenti accensione con starter
Low-loss ballasts for fluorescent lamps in starter operation

Verlustarme Vorschaltgeräte für Leuchtstofflampen in Starterbetrieb

Ballasts à faibles pertes pour lampes fluorescentes à starter

MEC 92-ES

EEL= IMQ Surveillance

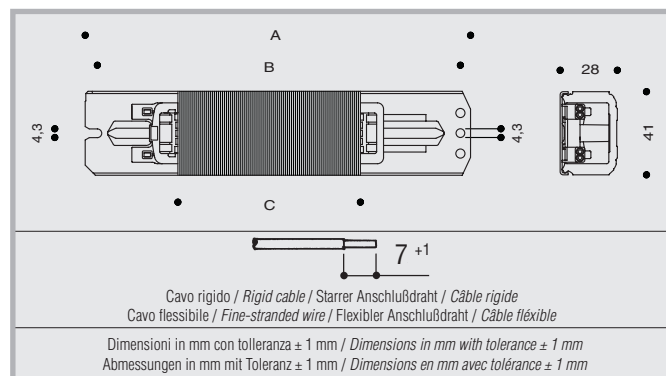

- Soluzione da incorporare
- Morsetto innesto rapido: cavo rigido 0,5 ÷ 1,5 mm²
- tw 130 °C
- Verificati in conformità alle EN 61347-2-8/60921

ITALIANO

- Ballast for built-in use
- Screwless terminal: rigid cable 0.5 ÷ 1.5 mm²
- tw 130 °C
- Tested in compliance with EN 61347-2-8/60921

ENGLISH


- Einbau-Vorschaltgerät
- Schraubenlose Klemme: für starren Draht 0,5 ÷ 1,5 mm²
- tw 130 °C
- Nach den Normen EN 61347-2-8/60921

DEUTSCH

- Ballast à incorporer
- Connexion rapide pour: câble rigide 0,5 ÷ 1,5 mm²
- tw 130 °C
- Conforme aux Normes EN 61347-2-8/60921

FRANCAIS

NOTE PER L'ORDINAZIONE / NOTE FOR ORDER
ANMERKUNG FÜR ORDNUNG / NOTE POUR LA COMMANDE



Morsetto ad innesto rapido con pulsante di rilascio disponibile su richiesta.
Codici come in tabella ma con /960.

Push-in terminal with release button available on demand.
Codes as indicated in the table but with /960.

Schraubenlose Klemme mit Auslöstaste lieferbar auf Anfrage.
Bitte Verlängerung /960 nach Hauptbestellnummer angeben.

Connexion rapide avec poussoir de relèvement disponible sur demande.
Veuillez SVP indiquer l'extension /960 après le code de base

Cat. n.1 2010

2.7.3

ERC HIGHLIGHT

ERC Highlight S.r.l. via dei Sassi, 2 - 23801 CALOLZIOCORTE (LC) Italy
tel. +39 0341 637311 fax +39 0341 637300 web www.erc.it E-mail erc@erc.it