



Proner Comatel
 Specific Electronic Applications (Board-to-Board Connectors)

SMT 2.54 mm Pitch - Top and Bottom Entry (3 and 5 Ways)




Application

- Designed for use on PCB in electronic boxes (cockpit)

Technical Features

- Current capacity:
 >1 A at 23 °C
 Rc < 10mΩ
- Insertion force:
 < 3.5 N per contact
- Contact: CuSn 6P
 Plating: SnPb 90/10
 Plastic: PPS

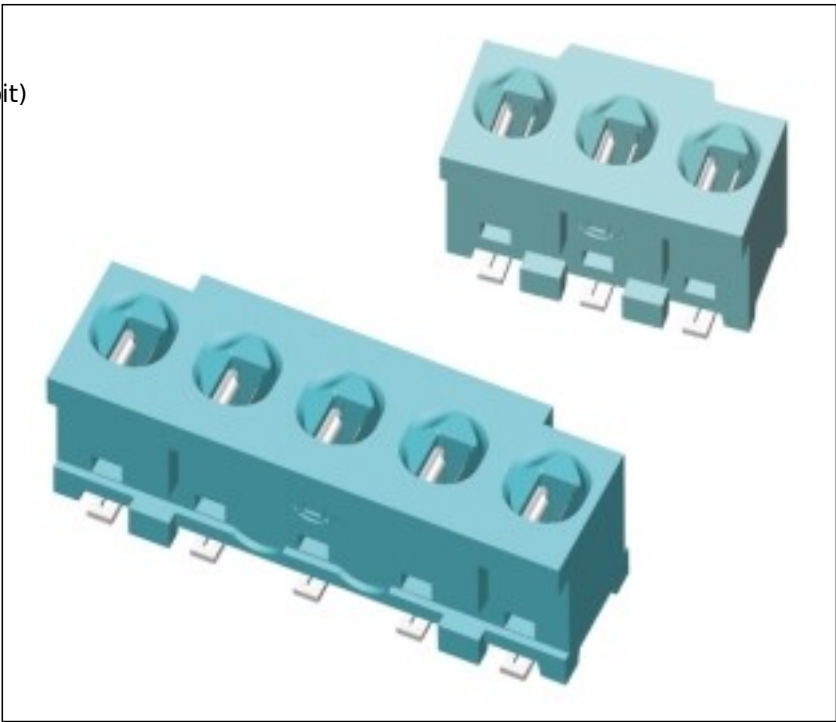

Car Industry



Truck Industry



Other Industry

Description	Color / Coding	Part Number	Packaging Unit
3 Ways	Natural	1544311-1	31,000
5 Ways	Natural	1544310-1	21,700