


HIGH PERFORMANCE TRIACS

FEATURES

- $I_{TRMS} = 4\text{ A}$
- $V_{DRM} = 400\text{ V to }800\text{ V}$
- SENSITIVE GATE : $I_{GT} \leq 10\text{ mA}$
- HIGH COMMUTATION : $(di/dt)_c > 3.5\text{ A/ms}$

DESCRIPTION

The T410 / T435 high voltage TRIAC Families are high performance planar diffused PNPN devices glass passivated technology. Packaged either in TO220AB, SOT82, SOT194 and ISOWATT220AB these products are intended for all bi-directional switch applications.

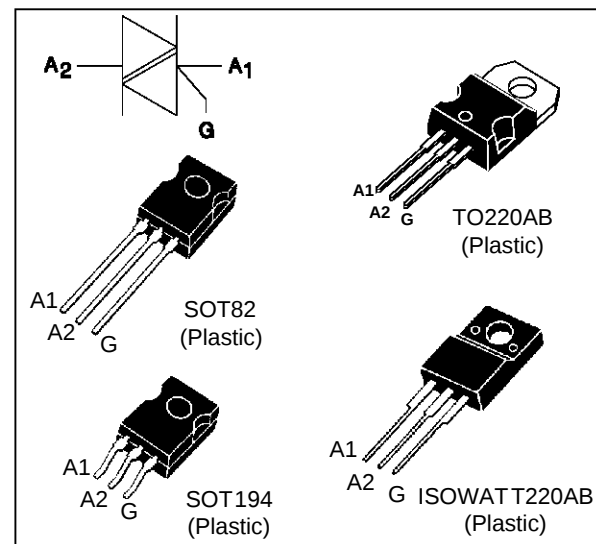

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter			Value	Unit
IT(RMS)	RMS on-state current (360° conduction angle)	TO220AB SOT194/SOT82	Tc = 110 °C	4	A
		ISOWATT220AB	Tc = 100 °C		
ITSM	Non repetitive surge peak on-state current (Tj initial = 25°C)		tp = 8.3 ms	35	A
			tp = 10 ms	30	
I2t	I2t value		tp = 10 ms	4.5	A2s
di/dt	Critical rate of rise of on-state current Gate supply : IG = 500mA diG/dt = 1A/μs		Repetitive F = 50 Hz	10	A/μs
			Non Repetitive	50	
Tstg Tj	Storage and operating junction temperature range			- 40 to + 150 - 40 to + 125	°C °C
TI	Maximum lead temperature for soldering during 10 s at 4.5 mm from case			260	°C

Symbol	Parameter	T410 or T435				Unit
		-400	-600	-700	-800	
V_{DRM} V_{RRM}	Repetitive peak off-state voltage $T_j = 125\text{ °C}$	400	600	700	800	V

THERMAL RESISTANCES

Symbol	Parameter		Value	Unit
Rth (j-a)	Junction to ambient	SOT82 / SOT194	100	°C/W
		TO220AB	60	
		ISOWATT 220AB	50	
Rth (j-c) DC	Junction to case for DC	SOT82 / SOT194 TO220AB	3.5	°C/W
		ISOWATT 220AB	5.3	
Rth (j-c) AC	Junction to case for 360° conduction angle (F= 50 Hz)	SOT82 / SOT194 TO220AB	2.6	°C/W
		ISOWATT 220AB	4	

GATE CHARACTERISTICS (maximum values)

$P_{G(AV)} = 1 \text{ W}$ $P_{GM} = 10 \text{ W}$ (tp = 20 μs) $I_{GM} = 4 \text{ A}$ (tp = 20 μs) $V_{GM} = 16 \text{ V}$ (tp = 20 μs).

ELECTRICAL CHARACTERISTICS

Symbol	Test Conditions		Quadrant		Suffix		Unit	
					T410	T435		
I _{GT}	V _D =12V (DC) R _L =33Ω	T _j =25°C	I-II-III	MAX	10	35	mA	
V _{GT}	V _D =12V (DC) R _L =33Ω	T _j =25°C	I-II-III	MAX	1.5		V	
V _{GD}	V _D =V _{DRM} R _L =3.3kΩ	T _j =125°C	I-II-III	MIN	0.2		V	
tgt	V _D =V _{DRM} I _G = 500mA dI _G /dt = 3A/μs I _{TM} = 5.5A	T _j =25°C	I-II-III	TYP	2		μs	
I _L	I _G =1.2 I _{GT}	T _j =25°C	I-II-III	MAX	30	60	mA	
I _H *	I _T = 100mA gate open	T _j =25°C		MAX	15	35	mA	
V _{TM} *	I _{TM} = 5.5A tp= 380μs	T _j =25°C		MAX	1.75		V	
I _{DRM} I _{RRM}	V _{DRM} Rated V _{RRM} Rated	T _j =25°C		MAX	0.01		mA	
		T _j =125°C		MAX	2			
dV/dt *	Linear slope up to V _D =67%V _{DRM} gate open	V _{DRM} = 400V / 600V	T _j =125°C		MIN	50	250	V/μs
						V _{DRM} = 700V / 800V	30	
(dI/dt) _c *	dV/dt = 0.1V/μs		T _j =125°C		MIN	2.7	4.4	A/ms
	dV/dt = 20V/μs				MIN	1.8	2.7	

* For either polarity of electrode A2 voltage with reference to electrode A1.

ORDERING INFORMATION

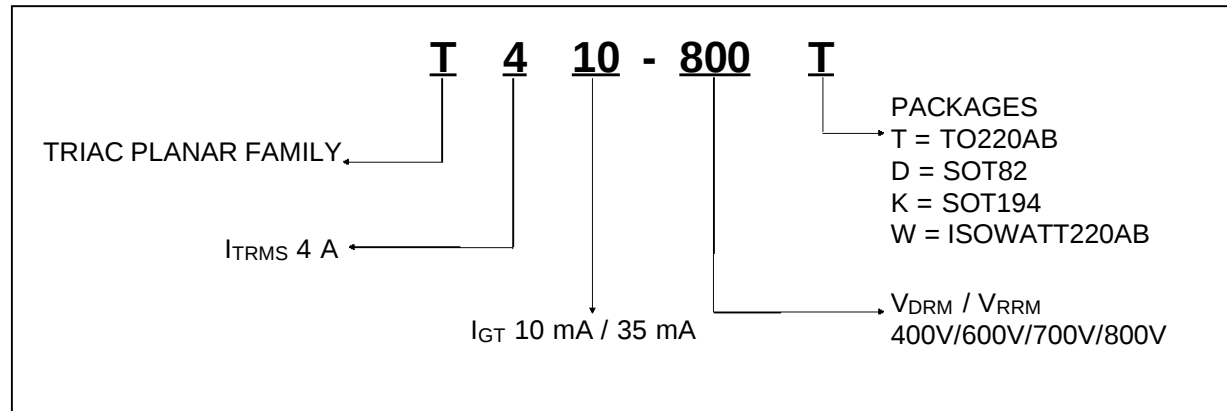


Fig.1 : Maximum RMS power dissipation versus RMS on-state current ($F=50Hz$).
 (Curves are cut off by $(di/dt)_c$ limitation)

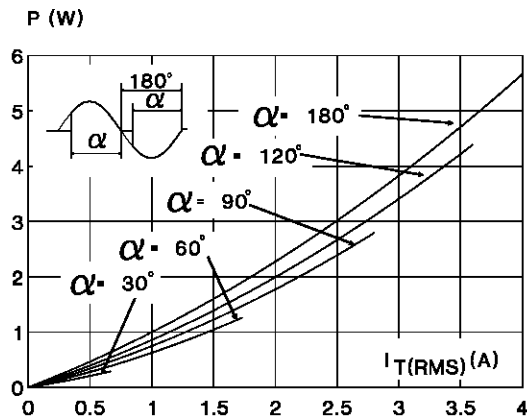


Fig.3 : Correlation between maximum RMS power dissipation and maximum allowable temperatures (T_{amb} and T_{case}) for different thermal resistances heatsink + contact (ISOWATT220AB).

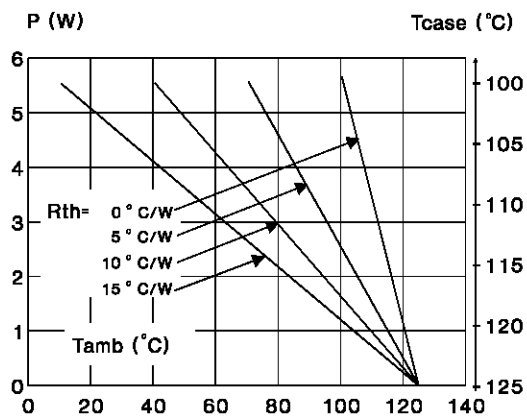


Fig.2 : Correlation between maximum RMS power dissipation and maximum allowable temperatures (T_{amb} and T_{case}) for different thermal resistances heatsink + contact (TO220AB / SOT82 / SOT 94).

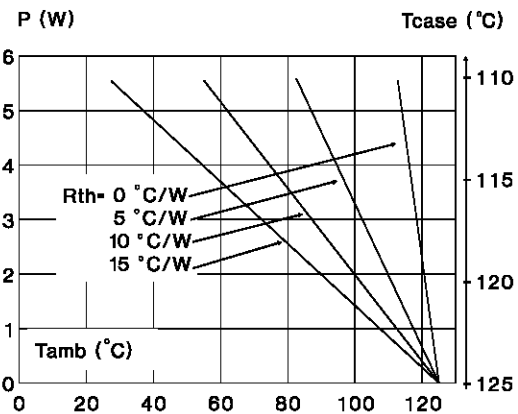


Fig.4 : RMS on-state current versus case temperature.

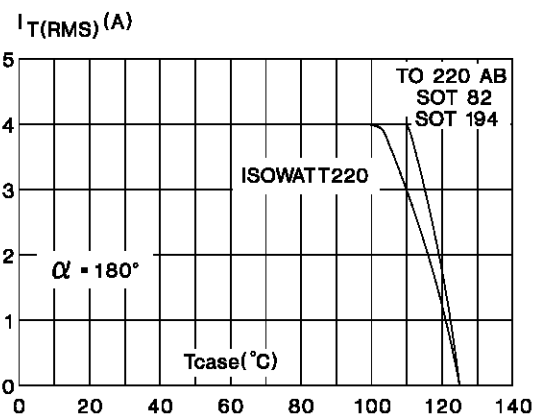


Fig.5 : Relative variation of thermal impedance versus pulse duration (SOT82 / SOT194 / TO220AB only).

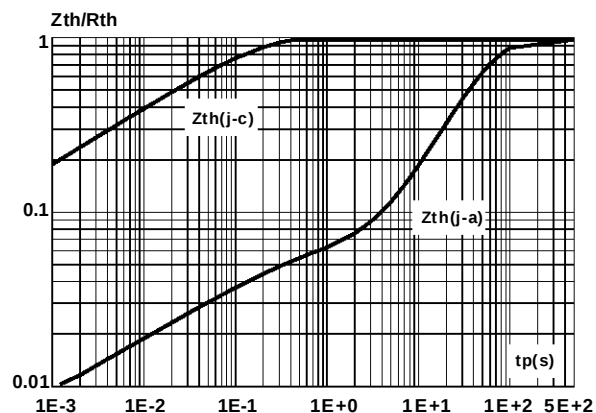


Fig.6 : Relative variation of thermal impedance versus pulse duration (ISOWATT220AB only).

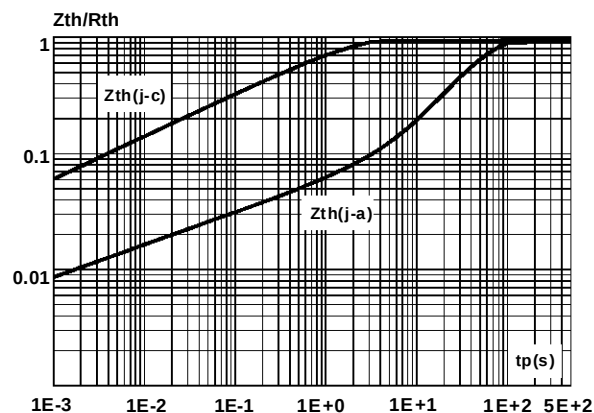


Fig.7 : Relative variation of gate trigger current and holding current versus junction temperature.

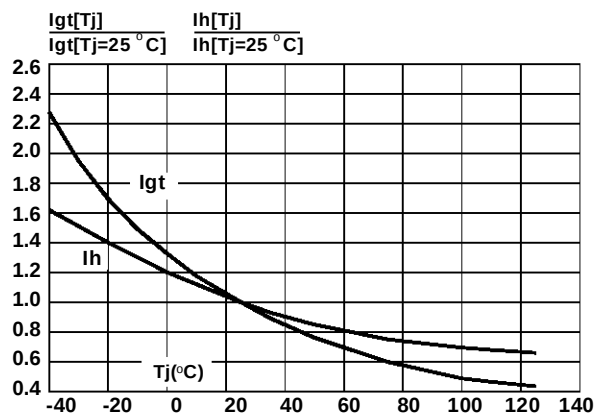


Fig.8 : Non Repetitive surge peak on-state current versus number of cycles.

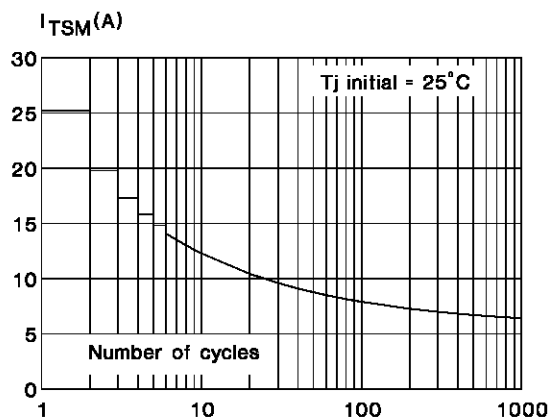


Fig.9 : Non repetitive surge peak on-state current for a sinusoidal pulse with width : $t \leq 10\text{ms}$, and corresponding value of I^2t .



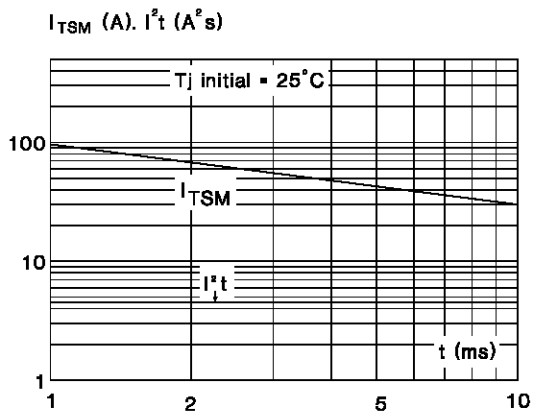


Fig.10 : On-state characteristics (maximum values).

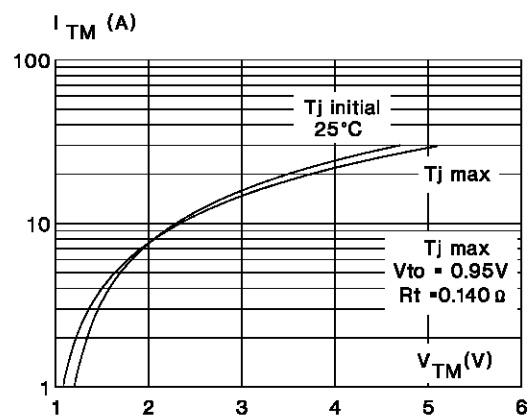

PACKAGE MECHANICAL DATA

TO220AB Plastic

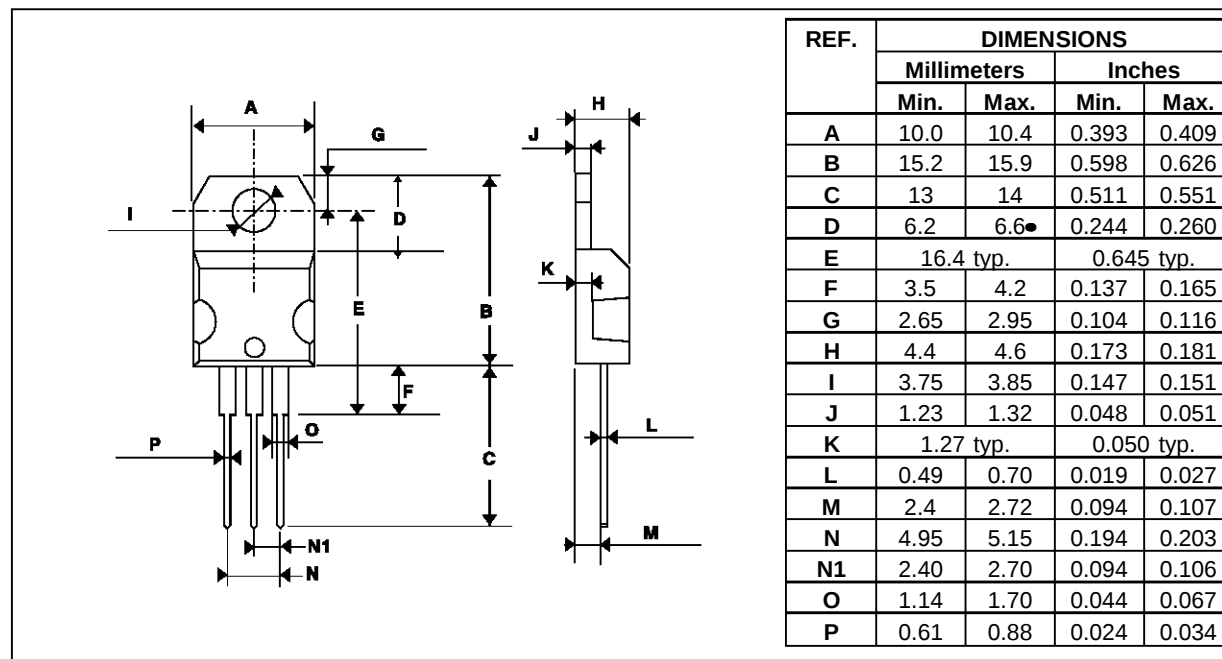

Cooling Method : C

Marking : Type number


Weight : 2 g

Recommended torque value : 0.55 m.N.

Maximum torque value : 0.70 m.N.

PACKAGE MECHANICAL DATA

ISOWATT220AB Plastic

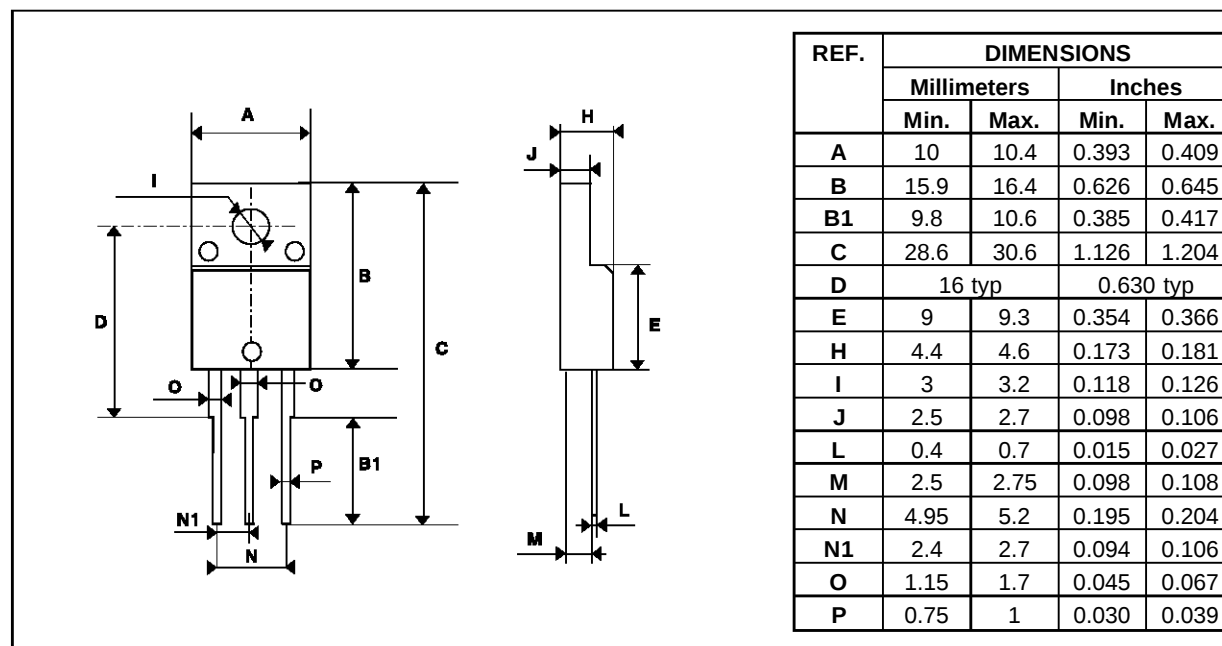

Cooling Method : C

Marking : Type number


Weight : 2.1g

Recommended torque value : 0.55 m.N.

Maximum torque value : 0.70 m.N.

PACKAGE MECHANICAL DATA

SOT82 Plastic

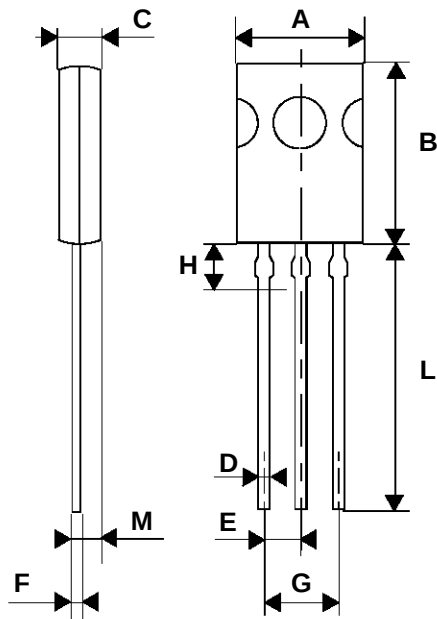

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	7.4	7.8	0.291	0.307
B	10.5	10.8	0.413	0.425
C	2.4	2.7	0.094	0.106
D	0.7	0.9	0.027	0.035
E	2.2 typ.		0.087 typ.	
F	0.49	0.75	0.019	0.029
G	4.15	4.65	0.163	0.183
H (1)		2.54		0.100
L	15.7 typ.		0.618 typ.	
M	1.0	1.3	0.039	0.051


(1) Within this region the cross-section of the leads is uncontrolled

Marking : Type number

Weight : 0.72g


PACKAGE MECHANICAL DATA

SOT194 Plastic

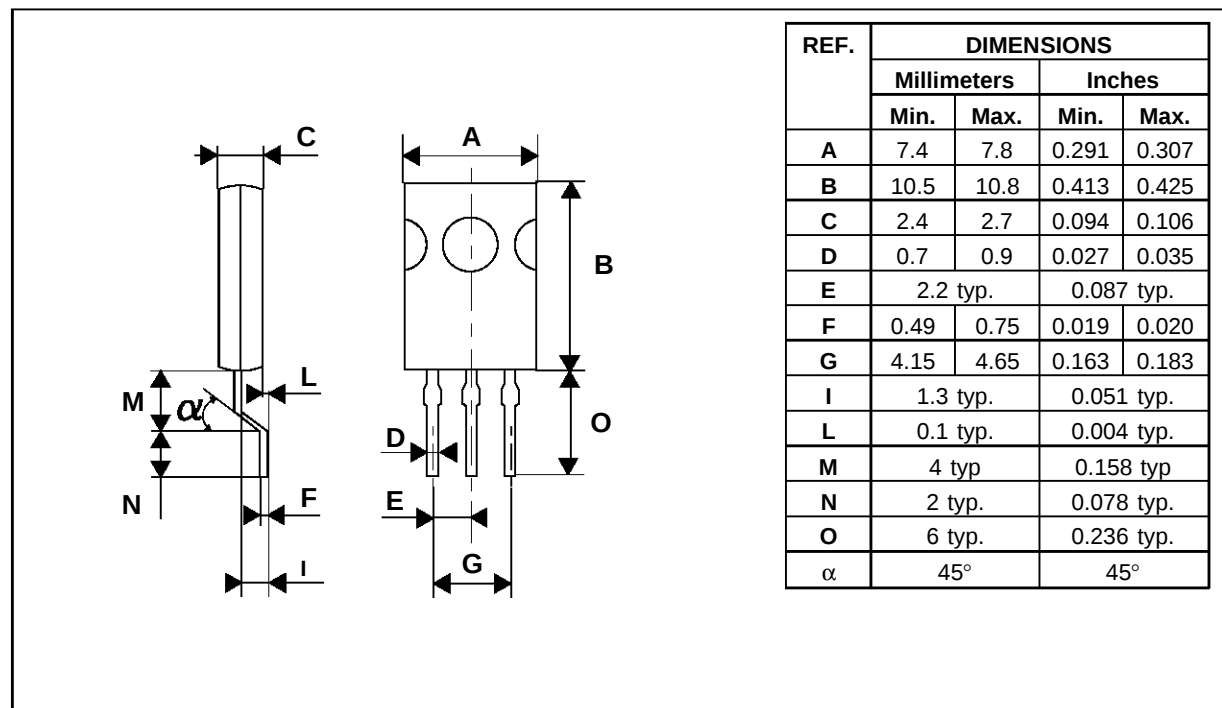

Marking : Type number

Weight : 0.68g

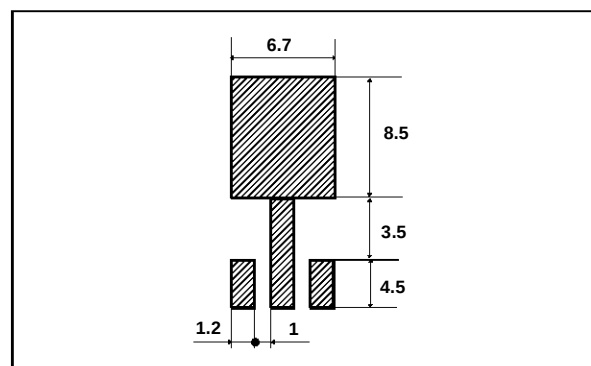FOOT PRINT

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied.

SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1995 SGS-THOMSON Microelectronics - All rights reserved.

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.